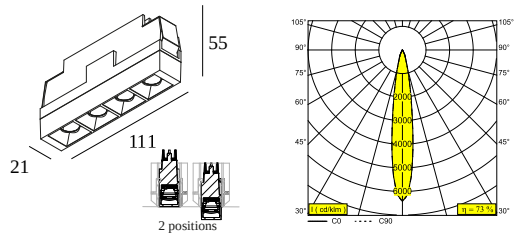


DOT.COM M4 TRIMLESS 93014

424 512 04 931 C

AVAILABLE IN
BLACK 424 512 04 931 B
CHROMED 424 512 04 931 C
FLEMISH GOLD 424 512 04 931 FG



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	rectangle - KIT
RECESSED DEPTH (MM)	60
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.2
ADJUSTABILITY	non adjustable
INFORMATION	4 x REFLECTOR SP-14° EXCL.LED POWER SUPPLY 500mA-DC

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	EAC, LCA

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED cluster 5,7W / CRI>90 (R9: 50) / 3000K / 648lm
TM-30 VALUES	Rf: 90 / Rg: 101
SDCM	SDCM3
RISKGROUP	RG2
LM80	L80 > 60000
BEAMANGLE	14°
LED TECHNICS (LIGHT SOURCE)	648lm // 5,7W // 114lm/W
LED TECHNICS (LUMINAIRE)	473lm // 6,6W // 72lm/W

Requirements	
MOUNTING KIT DOT.COM M4 TRIMLESS	
LED POWER SUPPLY 500mA-DC DIM (Remote)	

For detailed installation instructions, please consult the manual : [424_512_04_XXX_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
 Plasterboard	 424 512 04 00 - MOUNTING KIT DOT.COM M4 TRIMLESS	Required
 Stucanet	 424 512 04 00 - MOUNTING KIT DOT.COM M4 TRIMLESS	Required
 Concrete + plaster	 424 512 04 00 - MOUNTING KIT DOT.COM M4 TRIMLESS	Required
 Lintel + plaster	 424 512 04 00 - MOUNTING KIT DOT.COM M4 TRIMLESS	Required
 Hollow-core slab + plaster	 424 512 04 00 - MOUNTING KIT DOT.COM M4 TRIMLESS	Required
 Stretched ceiling	 15212 0180 - MOUNTING KIT DOT.COM M4 TRIMLESS WSC	Required
	 15212 0110 - MOUNTING KIT DOT.COM M4 TRIMLESS CSC	Required

FINISH YOUR SPECIFICATION


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 48 500 ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1

3

Dimtype: 1-10V

Cutout dimension (mm): 30




300 48 500 ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

3

Dimtype: DALI

Cutout dimension (mm): 45




300 48 500 MDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL

3

Dimtype: non-dimmable

Cutout dimension (mm): 30













300 48 500 WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL

3

Dimtype: WDL = wireless dimmable








Cutout dimension (mm): 45

	300 90 61 LED POWER SUPPLY MULTI-POWER DIM6 Dimtype: mains (phase cut-off) or push button Cutout dimension (mm): 56	4	☐
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 82	6(6)	☐
	300 90 64 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 72	4(2)	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5 Dimtype: DALI Cutout dimension (mm): 72	4(2)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 84	9(7)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 55	3(2)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 Dimtype: DALI Cutout dimension (mm): 55	3(2)	☐
	300 90 135 LED POWER SUPPLY MULTI-POWER HV Dimtype: non-dimmable Cutout dimension (mm): 90	3->7	☐
	21012 0010 LED POWER SUPPLY MULTI POWER Dimtype: non-dimmable Cutout dimension (mm): 50	3	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	4	☐


DELTALIGHT

DOT.COM M4 TRIMLESS 93014

424 512 04 931 C

	21012 0035 LED POWER SUPPLY MULTI POWER DIM5	4	☐
Dimtype: DALI			
Cutout dimension (mm): 54			
	21012 004W LED POWER SUPPLY MULTI-POWER WDL	6(6)	☐
Dimtype: WDL = wireless dimmable			
Cutout dimension (mm): 84			
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	4	☐
Dimtype: WDL = wireless dimmable			
Cutout dimension (mm): 54			
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8	2->2	☐
Dimtype: mains (phase cut-off)			
Cutout dimension (mm): 55			
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8	3->4	☐
Dimtype: mains (phase cut-off)			
Cutout dimension (mm): 55			
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	3	☐
Dimtype: mains (phase cut-off)			
Cutout dimension (mm): 48			
	21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	3	☐
Dimtype: DALI			
Cutout dimension (mm): 30			

Mounting kits


	424 512 04 00 MOUNTING KIT DOT.COM M4 TRIMLESS		☐
Cutout dimension (mm): 127 x 36			

DELTALIGHT


DOT.COM M4 TRIMLESS 93014

424 512 04 931 C

Mounting kits stretched ceiling



15212 0110 MOUNTING KIT DOT.COM M4 TRIMLESS CSC



15212 0180 MOUNTING KIT DOT.COM M4 TRIMLESS WSC



Notes: