


LUNELLE 52 M26L 92730 DIM5

32823 9225 BRA-B

- AVAILABLE IN
- ALU GEBÜRSTET-SCHWARZ 32823 9225 BRA-B
  - ALU GEBÜRSTET-WEISS 32823 9225 BRA-W
  - GEBÜRSTETES ANTHRAZIT-SCHWARZ 32823 9225 BRAT-B
  - GEBÜRSTETES ANTHRAZIT-WEISS 32823 9225 BRAT-W
  - GEBÜRSTETE BRAUNE BRONZE SCHWARZ 32823 9225 BRBB-B
  - GEBÜRSTETE BRAUNE BRONZE WEISS 32823 9225 BRBB-W
  - GEBÜRSTETES KUPFER-SCHWARZ 32823 9225 BRCU-B
  - GEBÜRSTETES KUPFER-WEISS 32823 9225 BRCU-W
  - GEBÜRSTETES GOLD-SCHWARZ 32823 9225 BRG-B
  - GEBÜRSTETES GOLD-WEISS 32823 9225 BRG-W
  - GEBÜRSTETE ALTE BRONZE-SCHWARZ 32823 9225 BROB-B
  - GEBÜRSTETE ALTE BRONZE-WEISS 32823 9225 BROB-W

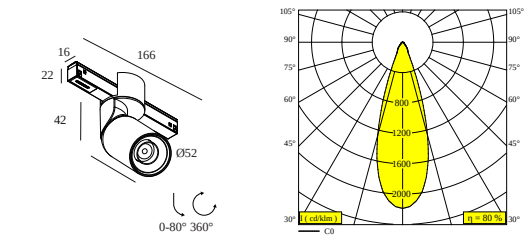

[View on website](#)




|                             |                                            |
|-----------------------------|--------------------------------------------|
| General info                |                                            |
| LOCATION                    | innenbereich                               |
| INSTALLATION                | Decke Niederspannungssysteme montiert      |
| INGRESS PROTECTION          | IP20                                       |
| WEIGHT (KG)                 | 0.4                                        |
| Electrical info             |                                            |
| ELECTRICAL                  | 48V-DC                                     |
| CLASS                       | III                                        |
| DIM TYPE                    | DALI                                       |
| ENERGY CLASS                | G                                          |
| Lightsource info            |                                            |
| LIGHTSOURCE NAME            | LED                                        |
| LIGHTSOURCE                 | LED 5,6W / CRI>90 (R9: 80) / 2700K / 485lm |
| SDCM                        | SDCM3                                      |
| RISKGROUP                   | RG2                                        |
| BEAMANGLE                   | 30°                                        |
| LED TECHNICS (LIGHT SOURCE) | 485lm // 5,6W // 86lm/W                    |
| LED TECHNICS (LUMINAIRE)    | 388lm // 6,4W // 60lm/W                    |
| Requirements                |                                            |
| LED POWER SUPPLY 48V-DC     |                                            |
| Accessories                 |                                            |
| VISOR 52                    |                                            |

For detailed installation instructions, please consult the manual : [32823\\_XXX5\\_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Licht veredelndes Zubehör



**32810 0010 DC** VISOR 52 DC



Notes: