



CONFORM P14 PDS DOWN-UP 954067

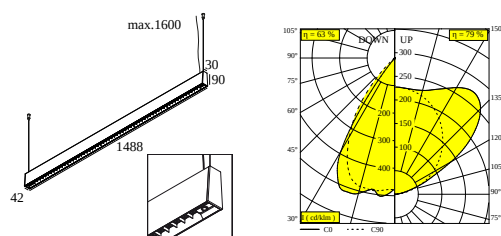
26514 7420 B-FG

AVAILABLE IN

BLACK-BLACK 26514 7420 B-B

BLACK-FLEMISH GOLD 26514 7420 B-FG

WHITE-BLACK 26514 7420 W-B



[View on website](#)



General info

LOCATION	indoor
INSTALLATION	Ceiling Suspended
INGRESS PROTECTION	IP20
WEIGHT (KG)	4.4
ADJUSTABILITY	non adjustable
INFORMATION	60 x REFLECTOR FL-67° (DOWN) INCL.DIMMABLE LED POWER SUPPLY 650mA-DC DOWN / 500mA-DC UP INCL.PRESENCE & DAYLIGHT SENSOR INCL.2 x CABLE SUSPENSION SINGLE AUTO. 1,6m INCL.1 x CABLE 3 x 0.75mm ² NATURAL LIGHT TECHNOLOGY

Electrical info

ELECTRICAL	220-240V / 0/50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	non-dimmable
ENERGY CLASS	D
CERTIFICATES	CB, ENEC, RCM

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	DOWN: LED cluster 22W / CRI>95 (R9: 50) / 4000K / 2694lm UP: LED cluster 16,8W / CRI>95 (R9: 50) / 4000K / 2078lm
SDCM	SDCM3
LM80	L80 > 60000
BEAMANGLE	67°
LED TECHNICS (LIGHT SOURCE)	DOWN: 2694lm // 22W // 123lm/W UP: 2078lm // 16,8W // 123lm/W
LED TECHNICS (LUMINAIRE)	DOWN: 1692lm // 25,3W // 67lm/W UP: 1637lm // 19,3W // 85lm/W

Options

CABLE BASE R / S

COVERSET R 62-90-100 / S 62-80-90


CONNECTION ST / CONNECTION TRIMLESS

SUSPENSION ST / SUSPENSION TRIMLESS



For detailed installation instructions, please consult the manual : [26514_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Current supply

	203 99 55 ANO CABLE BASE R ANO	☐
	203 99 55 B CABLE BASE R B	☐
	203 99 55 W CABLE BASE R W	☐
	203 99 56 ANO CABLE BASE S ANO	☐
	203 99 56 B CABLE BASE S B	☐
	203 99 56 W CABLE BASE S W	☐





Coversets

	204 00 62 ANO COVERSET R 62 ANO	☐
	204 00 62 B COVERSET R 62 B	☐
	204 00 62 W COVERSET R 62 W	☐
	204 00 90 ANO COVERSET R 90 ANO	☐

DELTALIGHT

CONFORM P14 PDS DOWN-UP 954067

26514 7420 B-FG


	<u>204 00 90 B</u>	COVERSET R 90 B	☐
	<u>204 00 90 W</u>	COVERSET R 90 W	☐
	<u>204 00 100 ANO</u>	COVERSET R 100 ANO	☐
	<u>204 00 100 B</u>	COVERSET R 100 B	☐
	<u>204 00 100 W</u>	COVERSET R 100 W	☐
	<u>204 62 62 ANO</u>	COVERSET S 62 ANO	☐
	<u>204 62 62 B</u>	COVERSET S 62 B	☐
	<u>204 62 62 W</u>	COVERSET S 62 W	☐
	<u>204 80 80 ANO</u>	COVERSET S 80 ANO	☐
	<u>204 80 80 B</u>	COVERSET S 80 B	☐
	<u>204 80 80 W</u>	COVERSET S 80 W	☐
	<u>204 90 90 ANO</u>	COVERSET S 90 ANO	☐
	<u>204 90 90 B</u>	COVERSET S 90 B	☐
	<u>204 90 90 W</u>	COVERSET S 90 W	☐

DELTALIGHT

CONFORM P14 PDS DOWN-UP 954067

26514 7420 B-FG


Suspension parts



328 10 01 SUSPENSION TRIMLESS O.F.A.

☐

Cutout dimension (mm): 62 (CONCRETE: 102)



15225 0340 B SUSPENSION ST B


☐

Cutout dimension (mm): 27

15225 0340 W SUSPENSION ST W

☐

Electric connection parts



328 10 03 CONNECTION TRIMLESS O.F.A.

☐

Cutout dimension (mm): 62 (CONCRETE: 102)



15225 0360 B CONNECTION ST B


☐

Cutout dimension (mm): 43


15225 0360 W CONNECTION ST W

☐

Other



26510 0010 PDS REMOTE CONTROL

☐

26510 0020 PDS SENSOR PROGRAMMER

☐

DELTALIGHT

CONFORM P14 PDS DOWN-UP 954067

26514 7420 B-FG

Notes: