
DELTALIGHT

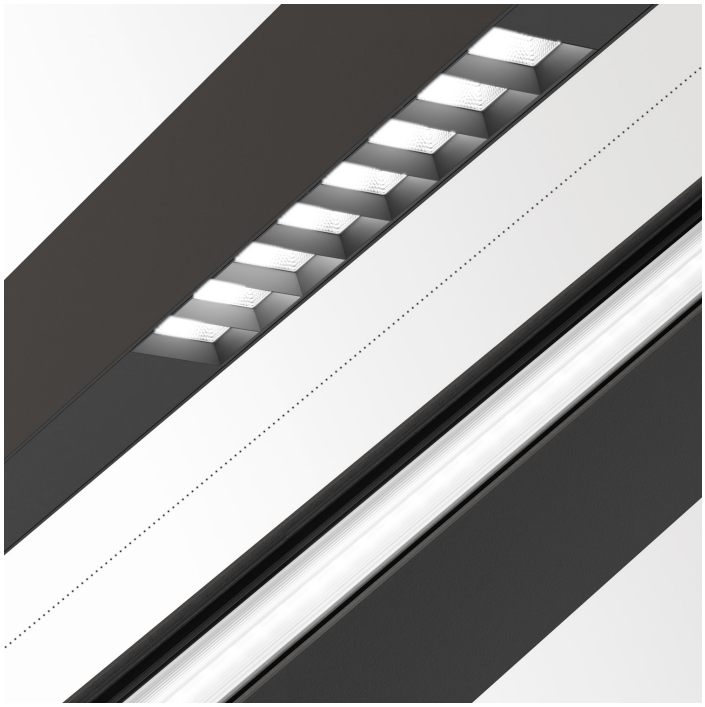

OML50 - INFORM DU HE 3280mm 8+16+8LED 93063 DIM5

REFERENCE 31445 9335 B

AVAILABLE IN
BLACK 31445 9335 B

View on website

General info	
LOCATION	indoor
INGRESS PROTECTION	IP20
WEIGHT (KG)	2.4
INFORMATION	CLUSTER DOWN: 1545lm/m CLUSTER UP: 1932lm/m INCL.DIMMABLE LED POWER SUPPLY (DALI-2 standard) CABLING 1 CIRCUIT

Electrical info	
ELECTRICAL	220-240V / 0|50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	DALI
ENERGY CLASS	D
CERTIFICATES	EPD, RCM

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	DOWN: LED cluster 32,6W / CRI>90 (R9: 50) / 3000K / 5069lm UP: LED cluster 40,8W / CRI>90 (R9: 50) / 3000K / 6336lm
TM-30 VALUES	Rf: 92 / Rg: 100
SDCM	SDCM3
RISKGROUP	RG1
LM80	L80 > 60000
BEAMANGLE	63°
LED TECHNICS (LIGHT SOURCE)	DOWN: 5069lm // 32,6W // 155lm/W UP: 6336lm // 40,8W // 155lm/W

Options

WIRELESS CONTROL DIM5

Notes: