




FRAX M 92747 HONEYCOMB DIM5

26011 9295 A

AVAILABLE IN  
**ALU GREY** 26011 9295 A  
**FLEMISH BRONZE OUTDOOR** 26011 9295 FBRX  
**ANTHRACITE** 26011 9295 N

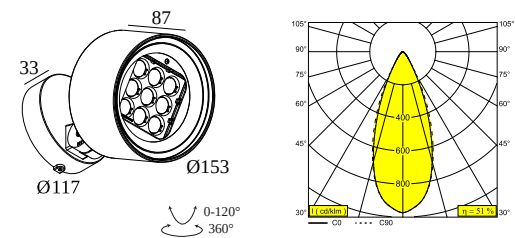

 [View on website](#)



General info

|                                      |                                                                                                    |
|--------------------------------------|----------------------------------------------------------------------------------------------------|
| LOCATION                             | outdoor                                                                                            |
| INSTALLATION                         | Floor Surface mounted,Wall Surface mounted                                                         |
| INGRESS PROTECTION                   | IP65                                                                                               |
| PROTECTION AGAINST MECHANICAL IMPACT | IK08                                                                                               |
| WEIGHT (KG)                          | 2.4                                                                                                |
| ADJUSTABILITY                        | 0° to 120° swiveling, 360° rotatable                                                               |
| INFORMATION                          | 9 x LENS SP-14°<br>INCL.DIMMABLE LED POWER SUPPLY 900mA-DC<br>INCL.BEAM LENS 47°<br>INCL.HONEYCOMB |

Electrical info

|              |                    |
|--------------|--------------------|
| ELECTRICAL   | 110-277V / 50-60Hz |
| CLASS        | I                  |
| POWER SUPPLY | YES                |
| DIM TYPE     | DALI               |
| ENERGY CLASS | F                  |
| CERTIFICATES | EPD, RCM           |

Lightsource info

|                             |                                                      |
|-----------------------------|------------------------------------------------------|
| LIGHTSOURCE NAME            | LED                                                  |
| LIGHTSOURCE                 | LED cluster 23,4W / CRI>90 (R9: 50) / 2700K / 2423lm |
| TM-30 VALUES                | Rf: 91 / Rg: 100                                     |
| SDCM                        | SDCM3                                                |
| RISKGROUP                   | RG2                                                  |
| LM80                        | L80 > 150000                                         |
| BEAMANGLE                   | 47°                                                  |
| LED TECHNICS (LIGHT SOURCE) | 2423lm // 23,4W // 103lm/W                           |
| LED TECHNICS (LUMINAIRE)    | 1236lm // 26,9W // 46lm/W                            |

Options

FRAX ANTI VANDAL SCREWS

Accessories

FRAX M KAP

# DELTALIGHT


## FRAX M 92747 HONEYCOMB DIM5

26011 9295 A

For detailed installation instructions, please consult the manual : [26011\\_XX95\\_HAND.pdf](#)

### FINISH YOUR SPECIFICATION


#### Light altering devices



**26070 0020 N** FRAX M KAP N

☐

#### Other



**26070 0030** FRAX ANTI VANDAL SCREWS 5 PCS

☐

Notes: