




D-LINER 30 SBL LOC2 1390 930
DIM5

32075 9305 B

AVAILABLE IN
BLACK 32075 9305 B
WHITE 32075 9305 W

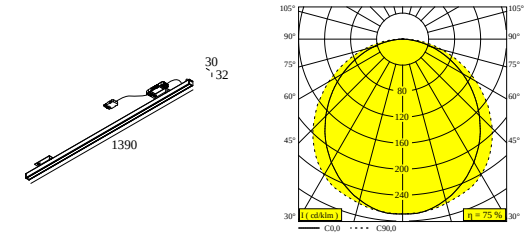

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
INGRESS PROTECTION	IP20
WEIGHT (KG)	0
ADJUSTABILITY	non adjustable
INFORMATION	INCL.DIMMABLE LED POWER SUPPLY 780mA-DC INCL.1 x CABLE 5 x 0,75mm ² - 0,5m + WIELAND PLUG GSTI8i5 male pastelblue
Electrical info	
ELECTRICAL	220-240V / 0 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	DALI
ENERGY CLASS	E
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED flex 30W / CRI>90 (R9: 60) / 3000K / 3600lm
SDCM	SDCM3
LM80	L70 > 30000
LED TECHNICS (LIGHT SOURCE)	3600lm // 30W // 122lm/W
LED TECHNICS (LUMINAIRE)	2286lm // 34,5W // 66lm/W

For detailed installation instructions, please consult the manual : [32075_XXX5_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 Acoustic climate-control ceiling Hunter Douglas 30BD	-

DELTALIGHT

D-LINER 30 SBL LOC2 1390 930 DIM5

32075 9305 B

Notes: