




FRAX M 92747 HONEYCOMB DIM5

26011 9295 FBRX

AVAILABLE IN
ALU GREY 26011 9295 A
FLEMISH BRONZE OUTDOOR 26011 9295 FBRX
ANTHRACITE 26011 9295 N

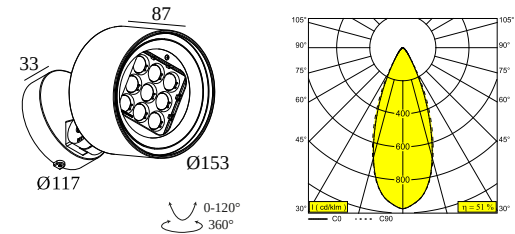

 [View on website](#)



General info	
LOCATION	outdoor
INSTALLATION	Floor Surface mounted,Wall Surface mounted
INGRESS PROTECTION	IP65
PROTECTION AGAINST MECHANICAL IMPACT	IK08
WEIGHT (KG)	2.4
ADJUSTABILITY	0° to 120° swiveling, 360° rotatable
INFORMATION	9 x LENS SP-14° INCL.DIMMABLE LED POWER SUPPLY 900mA-DC INCL.BEAM LENS 47° INCL.HONEYCOMB

Electrical info	
ELECTRICAL	110-277V / 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	DALI
ENERGY CLASS	F
CERTIFICATES	EPD, RCM

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED cluster 23,4W / CRI>90 (R9: 50) / 2700K / 2423lm
TM-30 VALUES	Rf: 91 / Rg: 100
SDCM	SDCM3
RISKGROUP	RG2
LM80	L80 > 150000
BEAMANGLE	47°
LED TECHNICS (LIGHT SOURCE)	2423lm // 23,4W // 103lm/W
LED TECHNICS (LUMINAIRE)	1236lm // 26,9W // 46lm/W

Options
FRAX ANTI VANDAL SCREWS

Accessories
FRAX M KAP

DELTALIGHT


FRAX M 92747 HONEYCOMB DIM5

26011 9295 FBRX

For detailed installation instructions, please consult the manual : [26011_XX95_HAND.pdf](#)

FINISH YOUR SPECIFICATION


Light altering devices



26070 0020 N FRAX M KAP N

☐

Other



26070 0030 FRAX ANTI VANDAL SCREWS 5 PCS

☐

Notes: