



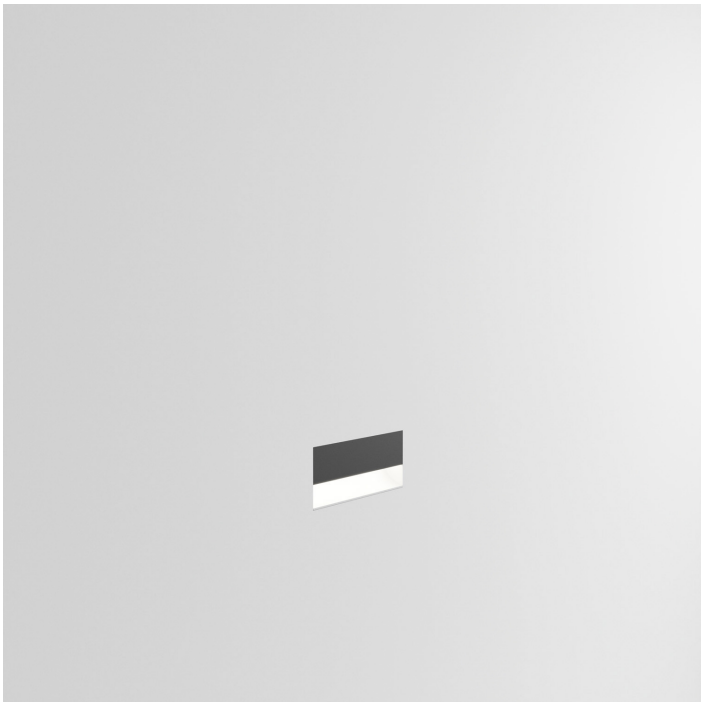

INLET TRIMLESS L20 927

13214 9200 B-W

AVAILABLE IN
BLACK-WHITE 13214 9200 B-W
GOLD COLORED-WHITE 13214 9200 GC-W
WHITE-WHITE 13214 9200 W-W

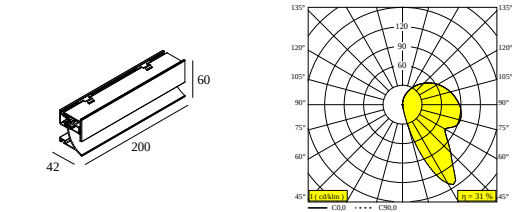

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Wall Recessed
CUTOUT SHAPE/SIZE (MM)	rectangle - KIT
RECESSED DEPTH (MM)	50
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	non adjustable
INFORMATION	EXCL.LED POWER SUPPLY 24V-DC

Electrical info	
ELECTRICAL	24V-DC
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	F

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	1 x LEDFLEX 2,8W / CRI>90 / 2700K / 327lm
LED TECHNICS (LIGHT SOURCE)	327lm // 2,8W // 117lm/W
LED TECHNICS (LUMINAIRE)	102lm // 3,2W // 32lm/W

Requirements	
MOUNTING KIT INLET TRIMLESS L20	
LED POWER SUPPLY 24V-DC (Remote)	

For detailed installation instructions, please consult the manual : [13214_XXX0_HAND.pdf](#)

INLET TRIMLESS L20 927

13214 9200 B-W

FINISH YOUR SPECIFICATION

LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 89 24 150 LED POWER SUPPLY 24V-DC / 150W

48

Dimtype: non-dimmable

Cutout dimension (mm): 75




21012 0101 LED POWER SUPPLY 24V-DC / 60W IP67 DIM1

19

Dimtype: 1-10V

Cutout dimension (mm): 65




21012 0111 LED POWER SUPPLY 24V-DC / 90W IP67 DIM1

29

Dimtype: 1-10V

Cutout dimension (mm): 75




21012 0121 LED POWER SUPPLY 24V-DC / 120W IP67 DIM1

39

Dimtype: 1-10V

Cutout dimension (mm): 75




21012 0135 LED POWER SUPPLY 24V-DC / 60W IP67 DIM5

19

Dimtype: DALI

Cutout dimension (mm): 65




21012 0145 LED POWER SUPPLY 24V-DC / 90W IP67 DIM5

29

Dimtype: DALI

Cutout dimension (mm): 75



21012 0155 LED POWER SUPPLY 24V-DC / 120W IP67 DIM5

39

Dimtype: DALI

Cutout dimension (mm): 75



21012 0160 LED POWER SUPPLY 24V-DC / 24W

7






Dimtype: non-dimmable

Cutout dimension (mm): 55


DELTALIGHT

INLET TRIMLESS L20 927

13214 9200 B-W

	<u>21012 0171</u> LED POWER SUPPLY 24V-DC / 60W DIM1	19	☐
Dimtype: 1-10V			
Cutout dimension (mm): 61			
	<u>21012 0181</u> LED POWER SUPPLY 24V-DC / 90W DIM1	29	☐
Dimtype: 1-10V			
Cutout dimension (mm): 70			
	<u>21012 0191</u> LED POWER SUPPLY 24V-DC / 120W DIM1	39	☐
Dimtype: 1-10V			
Cutout dimension (mm): 70			
	<u>21012 0205</u> LED POWER SUPPLY 24V-DC / 60W DIM5	19	☐
Dimtype: DALI			
Cutout dimension (mm): 61			
	<u>21012 0225</u> LED POWER SUPPLY 24V-DC / 100W DIM5	32	☐
Dimtype: DALI			
Cutout dimension (mm): 70			

Mounting kits

	<u>13210 0040</u> MOUNTING KIT INLET TRIMLESS L20	☐
Cutout dimension (mm): 205 x 75		

Notes: