




**HEDRA 39 W 40 DOWN-UP 92713**  
22536 9210 BBR-B

AVAILABLE IN  
**BLACK BRONZE-BLACK** 22536 9210 BBR-B  
**GOLD COLORED-BLACK** 22536 9210 GC-B  
**WHITE-WHITE** 22536 9210 W-W

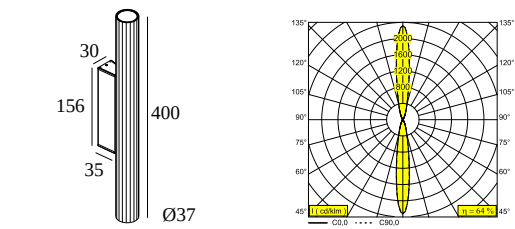

 [View on website](#)



| General info                |                                                        |
|-----------------------------|--------------------------------------------------------|
| LOCATION                    | indoor                                                 |
| INSTALLATION                | Wall Surface mounted                                   |
| INGRESS PROTECTION          | IP20                                                   |
| WEIGHT (KG)                 | 0.7                                                    |
| ADJUSTABILITY               | non adjustable                                         |
| INFORMATION                 | REFLECTOR SP-13°<br>INCL.LED POWER SUPPLY 350mA-DC     |
| Electrical info             |                                                        |
| ELECTRICAL                  | 220-240V / 50-60Hz                                     |
| CLASS                       | II                                                     |
| POWER SUPPLY                | YES                                                    |
| DIM TYPE                    | non-dimmable                                           |
| ENERGY CLASS                | E                                                      |
| CERTIFICATES                | LCA, RCM                                               |
| Lightsource info            |                                                        |
| LIGHTSOURCE NAME            | LED                                                    |
| LIGHTSOURCE                 | 2 x (LED array 3,9W / CRI>90 (R9: 56) / 2700K / 385lm) |
| TM-30 VALUES                | rf: 91 / Rg: 99                                        |
| SDCM                        | SDCM2                                                  |
| RISKGROUP                   | RG2 (threshold 0,6m)                                   |
| LM80                        | L90B10 > 41000                                         |
| BEAMANGLE                   | 13°                                                    |
| LED TECHNICS (LIGHT SOURCE) | 770lm // 7,8W // 98lm/W                                |
| LED TECHNICS (LUMINAIRE)    | 495lm // 9W // 55lm/W                                  |

For detailed installation instructions, please consult the manual : [22536\\_XXX0\\_HAND.pdf](#)

Notes:

# DELTALIGHT

## **HEDRA 39 W 40 DOWN-UP 92713**

22536 9210 BBR-B