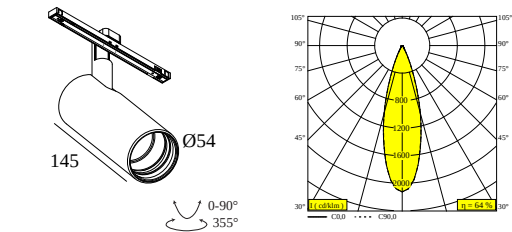




SOLI - 52 92730 Q-DIM

27118 924Q GC

AVAILABLE IN
BLACK 27118 924Q B
GOLD COLOURED 27118 924Q GC
WHITE 27118 924Q W



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 90° swiveling, 360° rotatable
INFORMATION	REFLECTOR FL-30° EXCL.LED POWER SUPPLY 48V-DC Optional REFLECTORS 20° & 45° available

Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	Qbus dim
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, LCA

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 10,3W / CRI>90 (R9: 60) / 2700K / 1224lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	1224lm // 10,3W // 119lm/W
LED TECHNICS (LUMINAIRE)	781lm // 11,8W // 66lm/W

Requirements	
SPY 52 TUBE	
LED POWER SUPPLY 48V-DC	

Accessories	
HONEYCOMB 42	
SPREAD LENS 42	
LINEAR SPREAD LENS 42	
SOFTENING LENS 42	
GLASS SBL 42	







DELTALIGHT

SOLI - 52 92730 Q-DIM

27118 924Q GC

For detailed installation instructions, please consult the manual : [27118_XXXQ_HAND.pdf](#)


FINISH YOUR SPECIFICATION

LED power supplies		# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
 300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN Dimtype: non-dimmable		9 ☐
 300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN Dimtype: non-dimmable		23 ☐
 21012 0230 LED POWER SUPPLY 48V-DC / 100W Dimtype: non-dimmable Cutout dimension (mm): 40		9 ☐
 21012 0240 LED POWER SUPPLY 48V-DC / 200W Dimtype: non-dimmable Cutout dimension (mm): 40		19 ☐
Light altering devices		
 19810 0010 B HONEYCOMB 42 SINGLE USE B		☐
 19810 0020 LINEAR SPREAD LENS 42		☐

DELTALIGHT

SOLI - 52 92730 Q-DIM


27118 924Q GC




19810 0030 SPREAD LENS 42

☐

19810 0040 SOFTENING LENS 42

☐


19810 0050 GLASS SBL 42

☐

19810 0060 B HONEYCOMB 42 DOUBLE USE B

☐

Finish your product



19810 0100 B SPY 52 TUBE B

☐

19810 0100 FBR SPY 52 TUBE FBR

☐

19810 0100 FG SPY 52 TUBE FG

☐


19810 0100 GC SPY 52 TUBE GC

☐

19810 0100 W SPY 52 TUBE W

☐

Replaceable reflector / lens



19810 0180 SPY 52 REFLECTOR 20°

☐


DELTALIGHT

SOLI - 52 92730 Q-DIM

27118 924Q GC





19810 0190 SPY 52 REFLECTOR 45°



19810 0240 SPY 52 REFLECTOR 30°



COMPATIBLE COMPOSABLES

SOLISCAPE profile	Available Colours
  27111 0020 SOLI - PROFILE 2m	 
  27111 0030 SOLI - PROFILE 3m	 

Notes: