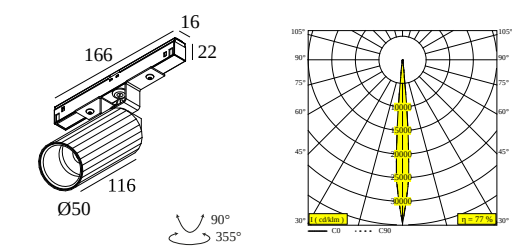




M26L - HEDRA 92708 DIM5

23251 9215 BBR

AVAILABLE IN
BLACK BRONZE 23251 9215 BBR
GOLD COLOURED 23251 9215 GC



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	LENS SP-8° EXCL.LED POWER SUPPLY 48V-DC

Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	F
CERTIFICATES	CB, ENEC

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,7W / CRI>90 (R9: 56) / 2700K / 519lm
TM-30 VALUES	rf: 91 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG2 (threshold 0,6m)
LM80	L90B10 > 41000
BEAMANGLE	8°
LED TECHNICS (LIGHT SOURCE)	519lm // 5,7W // 90lm/W
LED TECHNICS (LUMINAIRE)	397lm // 6,6W // 61lm/W

Remarks
Take a look at our MAGNETIC PROFILES movie

Requirements
VIZIR TUBE
LED POWER SUPPLY 48V-DC

Accessories
VIZIR HONEYCOMB
VIZIR SOFTENING LENS

M26L - HEDRA 92708 DIM5

23251 9215 BBR

For detailed installation instructions, please consult the manual : [23251_XXXX_HAND.pdf](#)

FINISH YOUR SPECIFICATION

LED power supplies		# of Fixtures
# of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
5510090 300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN Dimtype: non-dimmable	14	
63114125 300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN Dimtype: non-dimmable	34	
1729830 21012 0230 LED POWER SUPPLY 48V-DC / 100W Dimtype: non-dimmable Cutout dimension (mm): 40	14	
2239230 21012 0240 LED POWER SUPPLY 48V-DC / 200W Dimtype: non-dimmable Cutout dimension (mm): 40	29	
Light altering devices		
Ø40 473 03 01 B VIZIR HONEYCOMB B		
Ø40 473 03 04 VIZIR SOFTENING LENS		

DELTALIGHT






M26L - HEDRA 92708 DIM5

23251 9215 BBR

Finish your product

	473 01 00 B VIZIR TUBE B	☐
	473 01 00 FBR VIZIR TUBE FBR	☐
	473 01 00 FG VIZIR TUBE FG	☐
	473 01 00 W VIZIR TUBE W	☐


COMPATIBLE COMPOSABLES

SHIFTLINE M26L profile (+ SHIFTLINE M26L MATRIX)	Available Colours
	23358 0000 SLM26L - PROFILE 
	23358 0010 SLM26L - PROFILE 1m 
	23358 0020 SLM26L - PROFILE 2m 
	23358 0030 SLM26L - PROFILE 3m 
SHIFTLINE M35R profile	Available Colours
	23375 0000 SLM35R - PROFILE 


DELTALIGHT

M26L - HEDRA 92708 DIM5


23251 9215 BBR



23375 0010 SLM35R - PROFILE 1m



23375 0020 SLM35R - PROFILE 2m



23375 0030 SLM35R - PROFILE 3m



Notes: