




LED LINE OK 930 ADM SLIM DIM5

29311 9305 W

AVAILABLE IN
BLACK 29311 9305 B
WHITE 29311 9305 W

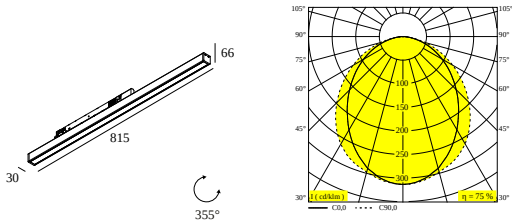

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Mains voltage track Mains voltage track mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.7
ADJUSTABILITY	355° swiveling
INFORMATION	3F DIMMABLE POWER SLIM ADAPTER 500mA
Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	II
POWER SUPPLY	YES
DIM TYPE	DALI
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, RCM
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED flex 18W / CRI>90 (R9: 60) / 3000K / 2240lm
SDCM	SDCM3
LM80	L70 > 30000
LED TECHNICS (LIGHT SOURCE)	2240lm // 18W // 124lm/W
LED TECHNICS (LUMINAIRE)	1677lm // 20,7W // 81lm/W
Requirements	
TRACK 3F DIM	

For detailed installation instructions, please consult the manual : [29311_XXX5_HAND.pdf](#)

COMPATIBLE TRACKS

TRACK 3F DIM H	Available Colours
200 14 410 TRACK 3F DIM H 1m	1000 m 1.6 kg  

DELTALIGHT

LED LINE OK 930 ADM SLIM DIM5

29311 9305 W

200 14 420 TRACK 3F DIM H 2m	2000 m	3.2 kg	 
200 14 430 TRACK 3F DIM H 3m	3000 m	4.8 kg	 
TRACK 3F DIM IN			Available Colours
200 13 410 TRACK 3F DIM IN 1m	1000 m	1.2 kg	 
200 13 420 TRACK 3F DIM IN 2m	2000 m	2.4 kg	 
200 13 430 TRACK 3F DIM IN 3m	3000 m	3.5 kg	 
TRACK 3F DIM ON			Available Colours
200 12 410 TRACK 3F DIM ON 1m	1000 m	1.1 kg	  
200 12 420 TRACK 3F DIM ON 2m	2000 m	2.1 kg	  
200 12 430 TRACK 3F DIM ON 3m	3000 m	3.1 kg	  

Notes: