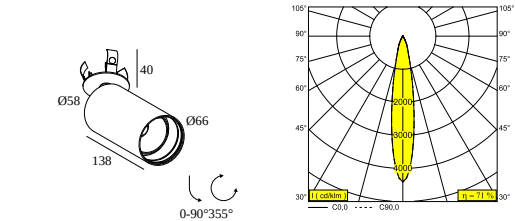




SPY 66 CLIP 92718

24621 9210 W-W

AVAILABLE IN  
**BLACK-BLACK** 24621 9210 B-B  
**FULL WHITE** 24621 9210 FW  
**WHITE-WHITE** 24621 9210 W-W



 [View on website](#)



General info

|                        |                                                                                                   |
|------------------------|---------------------------------------------------------------------------------------------------|
| LOCATION               | indoor                                                                                            |
| INSTALLATION           | Ceiling Semi-recessed                                                                             |
| CUTOUT SHAPE/SIZE (MM) | round - 51                                                                                        |
| RECESSED DEPTH (MM)    | 40                                                                                                |
| INGRESS PROTECTION     | IP20                                                                                              |
| WEIGHT (KG)            | 0.6                                                                                               |
| ADJUSTABILITY          | 0° to 90° swiveling, 355° rotatable                                                               |
| INFORMATION            | REFLECTOR SP-18°<br>EXCL.LED POWER SUPPLY 350-700mA-DC<br>Optional REFLECTORS 30° & 45° available |

Electrical info

|              |                           |
|--------------|---------------------------|
| CLASS        | III                       |
| DIM TYPE     | depending on power supply |
| ENERGY CLASS | E                         |
| CERTIFICATES | CB, ENEC, LCA             |

Lightsource info

|                             |                                                            |
|-----------------------------|------------------------------------------------------------|
| LIGHTSOURCE NAME            | LED                                                        |
| LIGHTSOURCE                 | LED array 11,6-25W / CRI>90 (R9: 60) / 2700K / 1458-2688lm |
| TM-30 VALUES                | Rf: 89 / Rg: 100                                           |
| SDCM                        | SDCM1                                                      |
| RISKGROUP                   | RG1                                                        |
| LM80                        | L90B10 > 50000                                             |
| BEAMANGLE                   | 18°                                                        |
| LED TECHNICS (LIGHT SOURCE) | 2688lm // 25W // 108lm/W                                   |
| LED TECHNICS (LUMINAIRE)    | 1920lm // 28,8W // 67lm/W                                  |

Remarks

GLASS / LENS 57: max. 500mA

Requirements

SPY 66 TUBE  
LED POWER SUPPLY 350 / 500 / 700mA-DC DIM

Options

MOUNTING KIT FLUSH SPY

Accessories

HONEYCOMB 57  
SPREAD LENS 57

# DELTALIGHT

## SPY 66 CLIP 92718

24621 9210 W-W

LINEAR SPREAD LENS 57  
SOFTENING LENS 57  
GLASS SBL 57

For detailed installation instructions, please consult the manual : [24621\\_XXX0\\_HAND.pdf](#)

### CEILING COMPATIBILITY

| Ceiling Type                                                                                                         | Mounting Kit                                                                                                                                 |
|----------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
|  <b>System ceiling</b>               |  414 90 01 - MOUNTING KIT FLUSH SPY <span>Required</span>   |
|  <b>Plasterboard</b>                 |  414 90 01 - MOUNTING KIT FLUSH SPY <span>Required</span>   |
|  <b>Stucanet</b>                     |  414 90 01 - MOUNTING KIT FLUSH SPY <span>Required</span>   |
|  <b>Wood</b>                       | -                                                                                                                                            |
|  <b>Concrete</b>                   | -                                                                                                                                            |
|  <b>Concrete + plaster</b>         |  414 90 01 - MOUNTING KIT FLUSH SPY <span>Required</span> |
|  <b>Lintel + plaster</b>           |  414 90 01 - MOUNTING KIT FLUSH SPY <span>Required</span> |
|  <b>Hollow-core slab</b>           | -                                                                                                                                            |
|  <b>Hollow-core slab + plaster</b> |  414 90 01 - MOUNTING KIT FLUSH SPY <span>Required</span> |
|  <b>Stretched ceiling</b>          | -                                                                                                                                            |

### FINISH YOUR SPECIFICATION

#### LED power supplies

#### # of Fixtures











# of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current

# DELTALIGHT











## SPY 66 CLIP 92718

24621 9210 W-W

|                                                                                    |                                                                          |   |                          |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------|---|--------------------------|
|    | <b>300 48 350 ED1</b> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1 | 1 | <input type="checkbox"/> |
|                                                                                    | Dimtype: 1-10V                                                           |   |                          |
|                                                                                    | Cutout dimension (mm): 30                                                |   |                          |
|    | <b>300 48 350 ED5</b> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5 | 1 | <input type="checkbox"/> |
|                                                                                    | Dimtype: DALI                                                            |   |                          |
|                                                                                    | Cutout dimension (mm): 45                                                |   |                          |
|    | <b>300 48 350 MDL</b> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL  | 1 | <input type="checkbox"/> |
|                                                                                    | Dimtype: non-dimmable                                                    |   |                          |
|                                                                                    | Cutout dimension (mm): 30                                                |   |                          |
|    | <b>300 48 350 WDL</b> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL  | 1 | <input type="checkbox"/> |
|                                                                                    | Dimtype: WDL = wireless dimmable                                         |   |                          |
|                                                                                    | Cutout dimension (mm): 45                                                |   |                          |
|  | <b>300 48 500 ED1</b> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1 | 1 | <input type="checkbox"/> |
|                                                                                    | Dimtype: 1-10V                                                           |   |                          |
|                                                                                    | Cutout dimension (mm): 30                                                |   |                          |
|  | <b>300 48 500 ED5</b> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5 | 1 | <input type="checkbox"/> |
|                                                                                    | Dimtype: DALI                                                            |   |                          |
|                                                                                    | Cutout dimension (mm): 45                                                |   |                          |
|  | <b>300 48 500 MDL</b> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL  | 1 | <input type="checkbox"/> |
|                                                                                    | Dimtype: non-dimmable                                                    |   |                          |
|                                                                                    | Cutout dimension (mm): 30                                                |   |                          |
|  | <b>300 48 500 WDL</b> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL  | 1 | <input type="checkbox"/> |
|                                                                                    | Dimtype: WDL = wireless dimmable                                         |   |                          |
|                                                                                    | Cutout dimension (mm): 45                                                |   |                          |
|  | <b>300 48 700 ED1</b> LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM1 | 1 | <input type="checkbox"/> |
|                                                                                    | Dimtype: 1-10V                                                           |   |                          |
|                                                                                    | Cutout dimension (mm): 30                                                |   |                          |
|  | <b>300 48 700 ED5</b> LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5 | 1 | <input type="checkbox"/> |
|                                                                                    | Dimtype: DALI                                                            |   |                          |
|                                                                                    | Cutout dimension (mm): 45                                                |   |                          |











SPY 66 CLIP 92718

24621 9210 W-W

|                                                                                    |                                                                         |                    |                          |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------|--------------------|--------------------------|
|    | <b>300 48 700 MDL</b> LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W MDL | 1                  | <input type="checkbox"/> |
|                                                                                    | Dimtype: non-dimmable                                                   |                    |                          |
|                                                                                    | Cutout dimension (mm): 30                                               |                    |                          |
|    | <b>300 48 700 WDL</b> LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W WDL | 1                  | <input type="checkbox"/> |
|                                                                                    | Dimtype: WDL = wireless dimmable                                        |                    |                          |
|                                                                                    | Cutout dimension (mm): 45                                               |                    |                          |
|    | <b>300 90 61</b> LED POWER SUPPLY MULTI-POWER DIM6                      | 1   1   1          | <input type="checkbox"/> |
|                                                                                    | Dimtype: mains (phase cut-off) or push button                           |                    |                          |
|                                                                                    | Cutout dimension (mm): 56                                               |                    |                          |
|    | <b>300 90 63</b> LED POWER SUPPLY MULTI-POWER DIM9                      | 2(2)   2(2)   2(1) | <input type="checkbox"/> |
|                                                                                    | Dimtype: 1-10V or DALI or push button                                   |                    |                          |
|                                                                                    | Cutout dimension (mm): 82                                               |                    |                          |
|  | <b>300 90 64</b> LED POWER SUPPLY MULTI-POWER DIM7                      | 1(1)   1(0)   1(0) | <input type="checkbox"/> |
|                                                                                    | Dimtype: 1-10V or push button                                           |                    |                          |
|                                                                                    | Cutout dimension (mm): 72                                               |                    |                          |
|  | <b>300 90 67</b> LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9   | 1   -   1          | <input type="checkbox"/> |
|                                                                                    | Dimtype: 1-10V or DALI or push button                                   |                    |                          |
|  | <b>300 90 68</b> LED POWER SUPPLY MULTI-POWER DIM5                      | 1(1)   1(0)   1(0) | <input type="checkbox"/> |
|                                                                                    | Dimtype: DALI                                                           |                    |                          |
|                                                                                    | Cutout dimension (mm): 72                                               |                    |                          |
|  | <b>300 90 69</b> LED POWER SUPPLY MULTI-POWER HV DIM9                   | 3(3)   3(2)   2(1) | <input type="checkbox"/> |
|                                                                                    | Dimtype: 1-10V or DALI or push button                                   |                    |                          |
|                                                                                    | Cutout dimension (mm): 84                                               |                    |                          |
|  | <b>300 90 124</b> LED POWER SUPPLY MULTI-POWER DIM7                     | 1(1)   1(0)   0    | <input type="checkbox"/> |
|                                                                                    | Dimtype: 1-10V or push button                                           |                    |                          |
|                                                                                    | Cutout dimension (mm): 55                                               |                    |                          |
|  | <b>300 90 125</b> LED POWER SUPPLY MULTI-POWER MINI DIM5                | 1(1)   1(0)   0    | <input type="checkbox"/> |
|                                                                                    | Dimtype: DALI                                                           |                    |                          |
|                                                                                    | Cutout dimension (mm): 55                                               |                    |                          |

SPY 66 CLIP 92718






24621 9210 W-W

|                                                                                     |                                                                                                                                     |                    |                          |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|--------------------|--------------------------|
|     | <b>300 90 135</b><br>LED POWER SUPPLY MULTI-POWER HV<br>Dimtype: non-dimmable<br>Cutout dimension (mm): 90                          | 2->2   2   2       | <input type="checkbox"/> |
|     | <b>21012 0010</b><br>LED POWER SUPPLY MULTI POWER<br>Dimtype: non-dimmable<br>Cutout dimension (mm): 50                             | 1   1   1          | <input type="checkbox"/> |
|    | <b>21012 0021</b><br>LED POWER SUPPLY MULTI POWER DIM1<br>Dimtype: 1-10V<br>Cutout dimension (mm): 54                               | 1   1   1          | <input type="checkbox"/> |
|    | <b>21012 0035</b><br>LED POWER SUPPLY MULTI POWER DIM5<br>Dimtype: DALI<br>Cutout dimension (mm): 54                                | 1   1   1          | <input type="checkbox"/> |
|   | <b>21012 004W</b><br>LED POWER SUPPLY MULTI-POWER WDL<br>Dimtype: WDL = wireless dimmable<br>Cutout dimension (mm): 84              | 2(2)   2(2)   2(1) | <input type="checkbox"/> |
|   | <b>21012 005W</b><br>LED POWER SUPPLY MULTI-POWER COMPACT WDL<br>Dimtype: WDL = wireless dimmable<br>Cutout dimension (mm): 54      | 1   1   1          | <input type="checkbox"/> |
|   | <b>21012 0268</b><br>LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8<br>Dimtype: mains (phase cut-off)<br>Cutout dimension (mm): 50 | 1                  | <input type="checkbox"/> |
|   | <b>21012 0288</b><br>LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8<br>Dimtype: mains (phase cut-off)<br>Cutout dimension (mm): 55 | 1   1              | <input type="checkbox"/> |
|   | <b>21012 0298</b><br>LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8<br>Dimtype: mains (phase cut-off)<br>Cutout dimension (mm): 48 | 1   1   0          | <input type="checkbox"/> |
|  | <b>21012 0480</b><br>LED POWER SUPPLY 350mA-DC / 17W IP68<br>Dimtype: non-dimmable<br>Cutout dimension (mm): 60                     | 1(1)               | <input type="checkbox"/> |


# DELTALIGHT

## SPY 66 CLIP 92718


24621 9210 W-W

|                                                                                    |                                                                      |      |                          |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------|------|--------------------------|
|   | <b>21012 0490</b> LED POWER SUPPLY 700mA-DC / 30W IP68               | 1(0) | <input type="checkbox"/> |
| Dimtype: non-dimmable                                                              |                                                                      |      |                          |
| Cutout dimension (mm): 60                                                          |                                                                      |      |                          |
|   | <b>21012 0500</b> LED POWER SUPPLY 500mA-DC / 24W IP68               | 1(0) | <input type="checkbox"/> |
| Dimtype: non-dimmable                                                              |                                                                      |      |                          |
| Cutout dimension (mm): 60                                                          |                                                                      |      |                          |
|    | <b>21032 0295</b> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5 | 1    | <input type="checkbox"/> |
| Dimtype: DALI                                                                      |                                                                      |      |                          |
| Cutout dimension (mm): 30                                                          |                                                                      |      |                          |
|    | <b>21032 0305</b> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5 | 1    | <input type="checkbox"/> |
| Dimtype: DALI                                                                      |                                                                      |      |                          |
| Cutout dimension (mm): 30                                                          |                                                                      |      |                          |
|  | <b>21032 0315</b> LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5 | 1    | <input type="checkbox"/> |
| Dimtype: DALI                                                                      |                                                                      |      |                          |
| Cutout dimension (mm): 30                                                          |                                                                      |      |                          |

### Mounting kits

|                                                                                    |                                         |                          |
|------------------------------------------------------------------------------------|-----------------------------------------|--------------------------|
|  | <b>414 90 01</b> MOUNTING KIT FLUSH SPY | <input type="checkbox"/> |
| Cutout dimension (mm): 83                                                          |                                         |                          |


### Light altering devices

|                                                                                    |                                               |                          |
|------------------------------------------------------------------------------------|-----------------------------------------------|--------------------------|
|  | <b>24611 0150 B</b> HONEYCOMB 57 SINGLE USE B | <input type="checkbox"/> |
|  | <b>24611 0160</b> GLASS SBL 57                | <input type="checkbox"/> |


# DELTALIGHT

## SPY 66 CLIP 92718


24621 9210 W-W




**24611 0170** LINEAR SPREAD LENS 57

☐

**24611 0190** SOFTENING LENS 57

☐


**24611 0200** SPREAD LENS 57

☐

**24611 0210 B** HONEYCOMB 57 DOUBLE USE B

☐

### Finish your product



**24611 0100 B** SPY 66 TUBE B

☐

**24611 0100 FBR** SPY 66 TUBE FBR

☐

**24611 0100 FG** SPY 66 TUBE FG

☐

**24611 0100 GC** SPY 66 TUBE GC

☐

**24611 0100 W** SPY 66 TUBE W

☐

### Replaceable reflector / lens



**24611 0220** SPY 66 REFLECTOR 18°

☐

# DELTALIGHT

## SPY 66 CLIP 92718

24621 9210 W-W



**24611 0230** SPY 66 REFLECTOR 30°

☐

**24611 0240** SPY 66 REFLECTOR 45°

☐

Notes: