




M26L - SPY 391 SOFT 93040 MDL

23437 9030 BRA

- AVAILABLE IN
- NEGRO 23437 9030 B
 - ALU CEPILLADO 23437 9030 BRA
 - ANTRACITA CEPILLADO 23437 9030 BRAT
 - COBRE CEPILLADO 23437 9030 BRCU
 - ORO CEPILLADO 23437 9030 BRG
 - BRONCE VIEJO CEPILLADO 23437 9030 BROB
 - FLEMISH BRONZE 23437 9030 FBR
 - FLEMISH GOLD 23437 9030 FG
 - ORO COLOREADO 23437 9030 GC
 - NEGRO PIANO 23437 9030 PB
 - BLANCO 23437 9030 W

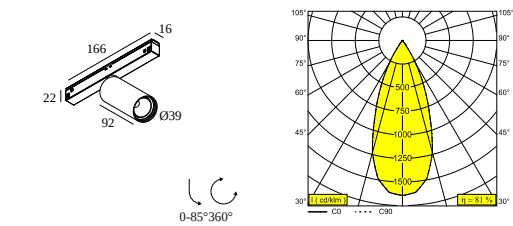

[View on website](#)



General info	
LOCATION	interior
INSTALLATION	Sistemas de baja tensión Montado en sistemas de baja tensión
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	0° to 85° giratorio, 360° orientable
INFORMATION	REFLECTOR WFL-40° EXCL.LED POWER SUPPLY 48V-DC
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	MDL = 1 a 10 v o DALI o SWITCH DE PRESION
ENERGY CLASS	F
CERTIFICATES	EPD
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 6W / CRI>90 (R9: 50) / 3000K-1800K / 623lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	40°
LED TECHNICS (LIGHT SOURCE)	623lm // 6W // 105lm/W
LED TECHNICS (LUMINAIRE)	505lm // 6,9W // 73lm/W

Requirements	
SPY 39 TUBE	
LED POWER SUPPLY 48V-DC	
Options	
DIMMABLE MODULATOR	

For detailed installation instructions, please consult the manual : [23437_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Cable de alimentación

of Fixtures

i # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



21032 0030 SMART 48 MODULATOR PLUG-IN WD

16

Dimtype: WDL = Regulable inalámbrico

SMART 48

of Fixtures

i # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



300 90 011 SMART 48 MODULATOR DIM9

16

Dimtype: 1 a 10 V o DALI o switch de presion



300 90 012 SMART 48 MODULATOR WD

16

Dimtype: WDL = Regulable inalámbrico

Fuente de Alimentación LED

of Fixtures

i # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN



8

Dimtype: no dimerizable


DELTALIGHT

M26L - SPY 391 SOFT 93040 MDL


23437 9030 BRA

	300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN	20	☐
Dimtype: no dimerizable			
	21012 0230 LED POWER SUPPLY 48V-DC / 100W	8	☐
Dimtype: no dimerizable			
Cutout dimension (mm): 40			
	21012 0240 LED POWER SUPPLY 48V-DC / 200W	17	☐
Dimtype: no dimerizable			
Cutout dimension (mm): 40			

Termina tu producto

	24144 0010 B SPY 39 TUBE B	☐
	24144 0010 FBR SPY 39 TUBE FBR	☐
	24144 0010 FG SPY 39 TUBE FG	☐
	24144 0010 GC SPY 39 TUBE GC	☐
	24144 0010 W SPY 39 TUBE W	☐
	24144 0070 SPY 39 TUBE SBL	☐


COMPATIBLE COMPOSABLES

SHIFTLINE M26L profile (+ SHIFTLINE M26L MATRIX)	Available Colours
	 
23358 0000 SLM26L - PROFILE	


DELTALIGHT

M26L - SPY 391 SOFT 93040 MDL


23437 9030 BRA



23358 0010 SLM26L - PROFILE 1m



23358 0020 SLM26L - PROFILE 2m



23358 0030 SLM26L - PROFILE 3m



Notes: