

OONO P



There is more to the sophisticated Oono than just its gentle embracing glow. Built in first instance as a family of exterior products, Oono is a family of dualities. It combines elegant looks with a warm diffused light effect. It couples the sturdy look of metal with the pureness of glass. It unifies exterior and interior, as the range offers IP-rated solutions for outdoor with straightforward surface mounted and pendant luminaires for indoors. It unites a play of straight lines with perfect circular shapes. It merges black and white, by adding a touch of gold. It brings together the shimmer of dusk with the fresh start of dawn.

Specification	
Adjustability:	Fixed
Rating:	Wet

Performance	
CRI / TM-30 (3000K):	90 / Rf: 90 / Rg: 99
SDCM:	1
LED Maintenance:	L90B10>50,000h
*Standard Power:	8.6W

Delivered Lumens	2700K	3000K
Oono P:	572	599

Listing

ETL certified to US and Canadian safety standards.

Warranty

5-year limited warranty.

Ordering

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: ONB4-30SPGFX-B-DMINCD8-120

Luminaire	Height	CCT	Power*	Style	Function	Finish	Installation	Application	Controls***
ONB OONO	4 436mm / 17 ⁹ / ₁₆ " Length 7 743mm / 29 ¹ / ₄ "	27 2700K 30 3000K	SP Standard Power	G Frosted Glass Enclosed	FX Fixed Bollard, Exterior Use	B Black N Anthracite	DM Direct Mount PL Plate Mount PM Pin Mount	INC Integral Power Supply	D8-120 FE ELV dim 120V

*** Contact factory for additional dimming options

Related Products

Oono F, Oono W (wall)




Finish Options

OONO P 4


OONO P 7

Accessories



IP68 CONNECTOR 3P
6 216 12 03

Photometric Data

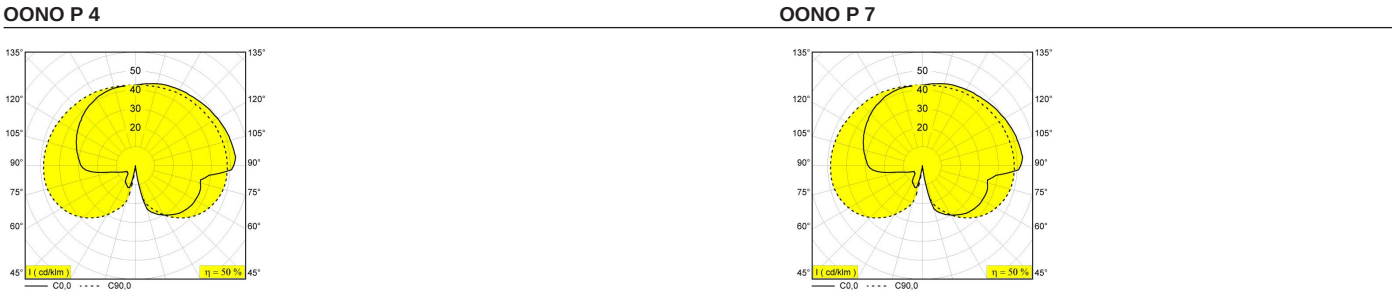

Installation Options

PL - PLATE 7

PM - PIN 12

Driver Options

D8		
• Dimming Control	Phase Control	Dimmer Compatibility • Leviton IPE04-1LZ • Lutron DVELV-300P
• Dimming Range	10-100%	
• Dim to off	no	
• Power Factor @ Full Load	>0.9	
• Efficiency @ Full Load	≥80	
• THD @ Full Load	<5%	

As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.