




ENTERO RD-L LOC 94045

32059 9430 B

AVAILABLE IN  
**BLACK** 32059 9430 B  
**FULL WHITE** 32059 9430 FW

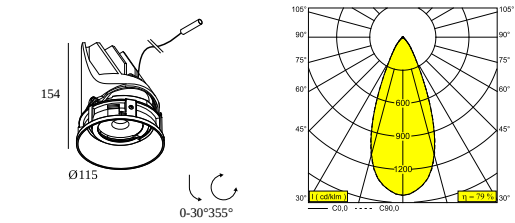

 [View on website](#)



| General info       |                                                                                                         |
|--------------------|---------------------------------------------------------------------------------------------------------|
| LOCATION           | indoor                                                                                                  |
| INSTALLATION       | Ceiling Recessed                                                                                        |
| INGRESS PROTECTION | IP20                                                                                                    |
| WEIGHT (KG)        | 0                                                                                                       |
| ADJUSTABILITY      | 0° to 30° swiveling, 355° rotatable                                                                     |
| INFORMATION        | EXCL.LED POWER SUPPLY 1050mA-DC<br>INCL.1 x CABLE 2 x 0,75mm² - 0,5m + WIELAND PLUG GST08i2 male yellow |

| Electrical info |     |
|-----------------|-----|
| CLASS           | III |
| ENERGY CLASS    | E   |

| Lightsource info            |                                                    |
|-----------------------------|----------------------------------------------------|
| LIGHTSOURCE NAME            | LED                                                |
| LIGHTSOURCE                 | LED array 36,5W / CRI>90 (R9: 79) / 4000K / 4845lm |
| TM-30 VALUES                | rf: 90 / Rg: 99                                    |
| SDCM                        | SDCM1                                              |
| RISKGROUP                   | RG1                                                |
| LM80                        | L90B10 > 50000                                     |
| BEAMANGLE                   | 45°                                                |
| LED TECHNICS (LIGHT SOURCE) | 4845lm // 36,5W // 133lm/W                         |
| LED TECHNICS (LUMINAIRE)    | 3814lm // 42W // 91lm/W                            |

| Requirements                    |  |
|---------------------------------|--|
| LED POWER SUPPLY SET LOC SERIES |  |

| Options                     |  |
|-----------------------------|--|
| CONNECTING CABLE LOC SERIES |  |


For detailed installation instructions, please consult the manual : [32059\\_XXX0\\_HAND.pdf](#)

CEILING COMPATIBILITY

| Ceiling Type                                                                                                                          | Mounting Kit                                                                                                        |          |
|---------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|----------|
|  Acoustic climate-control ceiling Interlu SAPP        |  32057 0010 - KIT ENTERO RD-S LOC1 | Required |
|  Acoustic climate-control ceiling Hunter Douglas 30BD |  32057 0010 - KIT ENTERO RD-S LOC1 | Required |

FINISH YOUR SPECIFICATION

| Emergency units                                                                                                                                                                                                                                                                                                                                       | # of Fixtures             |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| <div> # of fixtures indicates how many devices can be connected (min -&gt; max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.</div> | Min current   Max current |

|                                                                                    |                                                     |                        |
|------------------------------------------------------------------------------------|-----------------------------------------------------|------------------------|
|  | <b>32010 0065</b> EMERGENCY UNIT 1h LOC SERIES DIM5 | 1 <input type="text"/> |
| Dimtype: DALI                                                                      |                                                     |                        |

| Current supply                                                                      |                                                                       |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
|  | <b>32010 0200</b> T CONNECTOR LOC SERIES <input type="text"/>         |
|  | <b>32010 0310</b> CONNECTING CABLE LOC SERIES 1m <input type="text"/> |
|  | <b>32010 0320</b> CONNECTING CABLE LOC SERIES 2m <input type="text"/> |
|  | <b>32010 0330</b> CONNECTING CABLE LOC SERIES 3m <input type="text"/> |

# DELTALIGHT

## ENTERO RD-L LOC 94045

32059 9430 B



**32010 0340** CONNECTING CABLE LOC SERIES 4m

☐

**32010 0350** CONNECTING CABLE LOC SERIES 5m

☐


### LED power supplies

### # of Fixtures



# of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



**32010 0055** LED POWER SUPPLY SET LOC SERIES 1050mA / 50W DIM5

2

☐

Dimtype: DALI


### Mounting kits

### # of Fixtures



# of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



**32057 0020 B** KIT ENTERO RD-L LOC1 B

1

☐

Notes: