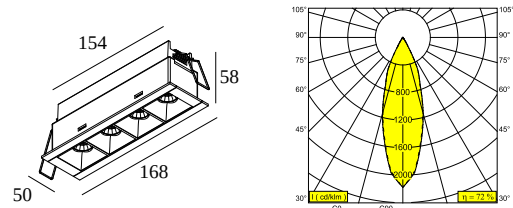




DOT.COM L4 ST 93032

424 213 04 932 W-C

AVAILABLE IN
BLACK-BLACK 424 213 04 932 B-B
BLACK-CHROMED 424 213 04 932 B-C
BLACK-FLEMISH GOLD 424 213 04 932 B-FG
WHITE-BLACK 424 213 04 932 W-B
WHITE-CHROMED 424 213 04 932 W-C
WHITE-FLEMISH GOLD 424 213 04 932 W-FG



 [View on website](#)






General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	rectangle - 158 x 40
RECESSED DEPTH (MM)	62
THICKNESS OF MOUNTING SURFACE (MM)	max.30
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	non adjustable
INFORMATION	4 x REFLECTOR FL-32° EXCL.LED POWER SUPPLY 500-1050mA-DC
Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	F
CERTIFICATES	CB, EAC, ENEC, LCA
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED cluster 5,7-12,6W / CRI>90 (R9: 50) / 3000K / 648-1226lm
TM-30 VALUES	Rf: 90 / Rg: 101
SDCM	SDCM3
RISKGROUP	RG2
LM80	L80 > 60000
BEAMANGLE	32°
LED TECHNICS (LIGHT SOURCE)	1226lm // 12,6W // 97lm/W
LED TECHNICS (LUMINAIRE)	889lm // 14,5W // 61lm/W
Requirements	
LED POWER SUPPLY 500 / 1050mA-DC DIM	

For detailed installation instructions, please consult the manual : [424_213_04_XXX_HAND.pdf](#)








CEILING COMPATIBILITY



Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-
 Stucanet	-
 Wood	-
 Stretched ceiling	-

FINISH YOUR SPECIFICATION

LED power supplies		# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
	300 48 500 ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1 Dimtype: 1-10V Cutout dimension (mm): 30	3
	300 48 500 ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5 Dimtype: DALI Cutout dimension (mm): 45	3
	300 48 500 MDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL Dimtype: non-dimmable Cutout dimension (mm): 30	3
	300 48 500 WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 45	3

	300 48 700 ED1 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM1	3	☐
	Dimtype: 1-10V		
	Cutout dimension (mm): 30		
	300 48 700 ED5 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5	3	☐
	Dimtype: DALI		
	Cutout dimension (mm): 45		
	300 48 700 MDL LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W MDL	3	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 30		
	300 48 700 WDL LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W WDL	3	☐
	Dimtype: WDL = wireless dimmable		
	Cutout dimension (mm): 45		
	300 90 61 LED POWER SUPPLY MULTI-POWER DIM6	4 3	☐
	Dimtype: mains (phase cut-off) or push button		
	Cutout dimension (mm): 56		
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	6(6) 6(4) 4(3)	☐
	Dimtype: 1-10V or DALI or push button		
	Cutout dimension (mm): 82		
	300 90 64 LED POWER SUPPLY MULTI-POWER DIM7	4(2) 3(1)	☐
	Dimtype: 1-10V or push button		
	Cutout dimension (mm): 72		
	300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9	3 3	☐
	Dimtype: 1-10V or DALI or push button		
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	4(2) 3(1) -	☐
	Dimtype: DALI		
	Cutout dimension (mm): 72		
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	9(7) 7(4) -	☐
	Dimtype: 1-10V or DALI or push button		
	Cutout dimension (mm): 84		

	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 55	3(2) 2(1) -	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 Dimtype: DALI Cutout dimension (mm): 55	3(2) 2(1) -	☐
	300 90 135 LED POWER SUPPLY MULTI-POWER HV Dimtype: non-dimmable Cutout dimension (mm): 90	3->7 3->7 3->5	☐
	300 90 136 LED POWER SUPPLY MULTI-POWER HC DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 90	3(3)	☐
	300 90 148 LED POWER SUPPLY 1050mA-DC / 22W Dimtype: non-dimmable Cutout dimension (mm): 48	1(0)	☐
	21012 0010 LED POWER SUPPLY MULTI POWER Dimtype: non-dimmable Cutout dimension (mm): 50	3 3 3	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	4 4 2	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	4 4 3	☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 84	6(6) 6(4) 4(3)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 54	4 4 3	☐

	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	2->2 2->2 -	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	3->4 3->4 -	☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 48	3 2 -	☐
	21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5 Dimtype: DALI Cutout dimension (mm): 30	3	☐
	21032 0315 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5 Dimtype: DALI Cutout dimension (mm): 30	3	☐

Notes: