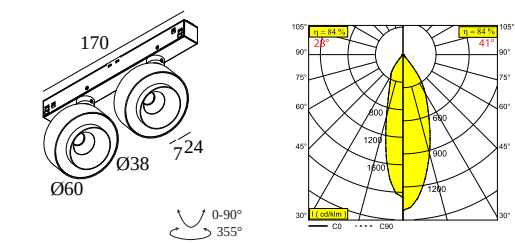




M26L - ODRON 2 93028/41 DIM5

26223 9305 B

AVAILABLE IN
BLACK 26223 9305 B
WHITE 26223 9305 W



[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 90° swiveling, 350° rotatable
INFORMATION	INCL.4 x INTERCHANGABLE REFLECTOR: FL-28° + WFL-41° EXCL.LED POWER SUPPLY 48V-DC

Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	E
CERTIFICATES	CB, ENEC

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	2 x (LED array 8,6W / CRI>90 (R9: 52) / 3000K / 1018lm)
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	28°/41°
LED TECHNICS (LIGHT SOURCE)	2036lm // 17,2W // 118lm/W
LED TECHNICS (LUMINAIRE)	1706lm // 19,8W // 86lm/W

Remarks
Take a look at our MAGNETIC PROFILES movie

Requirements
LED POWER SUPPLY 48V-DC

Accessories
ODRON COVER

For detailed installation instructions, please consult the manual : [26223_XXX5_HAND.pdf](#)

FINISH YOUR SPECIFICATION


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 89 48 90 LED POWER SUPPLY 48V-DC / 90W

4

Dimtype: non-dimmable


Cutout dimension (mm): 75



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

4


Dimtype: non-dimmable



300 89 48 150 LED POWER SUPPLY 48V-DC / 150W

7


Dimtype: non-dimmable



300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN

11

Dimtype: non-dimmable




21012 0230 LED POWER SUPPLY 48V-DC / 100W

4

Dimtype: non-dimmable

Cutout dimension (mm): 40



21012 0240 LED POWER SUPPLY 48V-DC / 200W

9

Dimtype: non-dimmable

Cutout dimension (mm): 40

Decorative ornaments











26210 0020 GC ODRON COVER GC

DELTALIGHT

M26L - ODRON 2 93028/41 DIM5

26223 9305 B

COMPATIBLE COMPOSABLES

SHIFTLINE M26L profile (+ SHIFTLINE M26L MATRIX)		Available Colours
	23358 0000 SLM26L - PROFILE	 
	23358 0010 SLM26L - PROFILE 1m	 
	23358 0020 SLM26L - PROFILE 2m	         
	23358 0030 SLM26L - PROFILE 3m	         
SHIFTLINE M35R profile		Available Colours
	23375 0000 SLM35R - PROFILE	
	23375 0010 SLM35R - PROFILE 1m	
	23375 0020 SLM35R - PROFILE 2m	
	23375 0030 SLM35R - PROFILE 3m	

Notes:

DELTALIGHT

M26L - ODRON 2 93028/41 DIM5

26223 9305 B