



ENTERO RD-S HE 93040

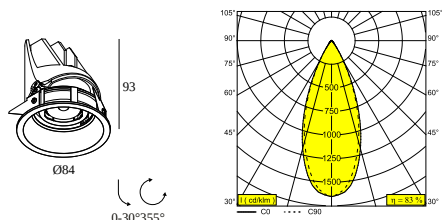
28485 9330 FW

AVAILABLE IN

BLACK 28485 9330 B

FULL WHITE 28485 9330 FW

GOLD COLOURED 28485 9330 GC



[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - 76
RECESSED DEPTH (MM)	100
THICKNESS OF MOUNTING SURFACE (MM)	max.16
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.25
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	LENS WFL-40° EXCL.LED POWER SUPPLY 350mA-DC

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	D
CERTIFICATES	CB, ENEC, EPD

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 6W / CRI>90 (R9: 50) / 3000K / 945lm
TM-30 VALUES	rf: 96 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	40°
LED TECHNICS (LIGHT SOURCE)	945lm // 6W // 157lm/W
LED TECHNICS (LUMINAIRE)	805lm // 6,9W // 117lm/W

Remarks
High Efficacy : > 100lm/W

Requirements
LED POWER SUPPLY 350mA-DC DIM

Options
ENTERO RD-S MOUNTING SET S2

DELTALIGHT

ENTERO RD-S HE 93040


28485 9330 FW

For detailed installation instructions, please consult the manual : [28485_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-
 Stucanet	-
 Wood	-
 Concrete	 28500 0190 - ENTERO RD-S MOUNTING SET S2 Required
 Concrete + plaster	 28500 0190 - ENTERO RD-S MOUNTING SET S2 Required
 Lintel + plaster	 28500 0190 - ENTERO RD-S MOUNTING SET S2 Required
 Hollow-core slab	 28500 0190 - ENTERO RD-S MOUNTING SET S2 Required
 Hollow-core slab + plaster	 28500 0190 - ENTERO RD-S MOUNTING SET S2 Required
 Stretched ceiling	-






FINISH YOUR SPECIFICATION

Emergency units
 21032 0270 B EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER B ☐
Cutout dimension (mm): 27
21032 0270 W EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER W ☐

DELTALIGHT

ENTERO RD-S HE 93040

28485 9330 FW

LED power supplies		# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
 300 90 91 LED POWER SUPPLY 350mA-DC / 15W		2(1) ☐
Dimtype: non-dimmable Cutout dimension (mm): 40		
 300 90 110 LED POWER SUPPLY 350mA-DC / 10W DIM8		1 ☐
Dimtype: mains (phase cut-off) Cutout dimension (mm): 42		
 300 90 116 LED POWER SUPPLY 350mA-DC / 18W DIM8		2->2 ☐
Dimtype: mains (phase cut-off) Cutout dimension (mm): 55		
 21012 0515 LED POWER SUPPLY MULTI POWER DIM5		1(1) ☐
Dimtype: DALI Cutout dimension (mm): 55		
 21012 0520 LED POWER SUPPLY 350mA-DC / 8W		1(0) ☐
Dimtype: non-dimmable Cutout dimension (mm): 47		
 21012 0575 LED POWER SUPPLY MULTI POWER DIM5		2->3(2) ☐
Dimtype: DALI Cutout dimension (mm): 55		

Mounting set S2

 28500 0190 ENTERO RD-S MOUNTING SET S2	☐
---	--------------------------

DELTALIGHT

ENTERO RD-S HE 93040

28485 9330 FW

Notes: