




M26L - SPY 39 FRAMER 930 DIM5

23432 9305 B

AVAILABLE IN
BLACK 23432 9305 B

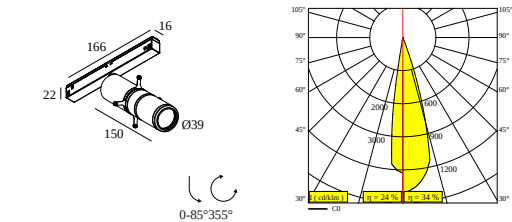

[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	0° to 85° swiveling, 360° rotatable
INFORMATION	EXCL.LED POWER SUPPLY 48V-DC
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	E
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 8,6W / CRI>90 (R9: 52) / 3000K / 1018lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	1018lm // 8,6W // 118lm/W
LED TECHNICS (LUMINAIRE)	347lm // 9,9W // 35lm/W
Requirements	
LED POWER SUPPLY 48V-DC	

For detailed installation instructions, please consult the manual : [23432_XXX5_HAND.pdf](#)

M26L - SPY 39 FRAMER 930 DIM5

23432 9305 B

FINISH YOUR SPECIFICATION

LED power supplies		# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
 300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN	Dimtype: non-dimmable	10
 300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN	Dimtype: non-dimmable	24
 21012 0230 LED POWER SUPPLY 48V-DC / 100W	Dimtype: non-dimmable Cutout dimension (mm): 40	10
 21012 0240 LED POWER SUPPLY 48V-DC / 200W	Dimtype: non-dimmable Cutout dimension (mm): 40	20


COMPATIBLE COMPOSABLES

SHIFTLINE M26L profile (+ SHIFTLINE M26L MATRIX)	Available Colours
 23358 0000 SLM26L - PROFILE	
 23358 0010 SLM26L - PROFILE 1m	
 23358 0020 SLM26L - PROFILE 2m	

DELTALIGHT

M26L - SPY 39 FRAMER 930 DIM5

23432 9305 B



32

23358 0030 SLM26L - PROFILE 3m



Notes: