




LOGIC 190 R OK 92714

30216 9210 INOX

AVAILABLE IN  
INOX 30216 9210 INOX

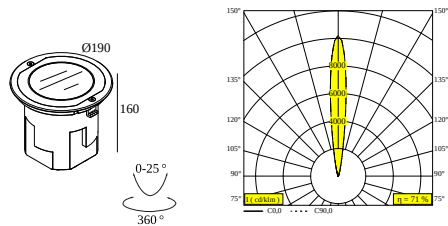

 [View on website](#)



| General info                         |                                                                                                                                               |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| LOCATION                             | outdoor                                                                                                                                       |
| INSTALLATION                         | Floor Recessed                                                                                                                                |
| CUTOUT SHAPE/SIZE (MM)               | round - BOX                                                                                                                                   |
| RECESSED DEPTH (MM)                  | 190                                                                                                                                           |
| INGRESS PROTECTION                   | IP67                                                                                                                                          |
| PROTECTION AGAINST MECHANICAL IMPACT | IK10                                                                                                                                          |
| WEIGHT (KG)                          | 2                                                                                                                                             |
| ADJUSTABILITY                        | 0° to 25° swiveling                                                                                                                           |
| INFORMATION                          | 9 x LENS SP-14°<br>INCL.LED POWER SUPPLY 500mA-DC<br>INCL.1 x CABLE H05 RN-F 3 x 0.75mm² 0,5m<br>INCL.IP68 CONNECTOR 3P<br>ESG 10mm max.500kg |

| Electrical info |                    |
|-----------------|--------------------|
| ELECTRICAL      | 220-240V / 50-60Hz |
| CLASS           | I                  |
| POWER SUPPLY    | YES                |
| DIM TYPE        | non-dimmable       |
| ENERGY CLASS    | F                  |
| CERTIFICATES    | CB, ENEC, EPD, RCM |

| Lightsource info            |                                                      |
|-----------------------------|------------------------------------------------------|
| LIGHTSOURCE NAME            | LED                                                  |
| LIGHTSOURCE                 | LED cluster 12,6W / CRI>90 (R9: 55) / 2700K / 1466lm |
| TM-30 VALUES                | Rf: 91 / Rg: 100                                     |
| SDCM                        | SDCM3                                                |
| RISKGROUP                   | RG2                                                  |
| LM80                        | L80 > 150000                                         |
| BEAMANGLE                   | 14°                                                  |
| LED TECHNICS (LIGHT SOURCE) | 1466lm // 12,6W // 116lm/W                           |
| LED TECHNICS (LUMINAIRE)    | 1039lm // 14,5W // 72lm/W                            |

| Requirements    |  |
|-----------------|--|
| LOGIC 190 R BOX |  |

| Options                            |  |
|------------------------------------|--|
| LOGIC 190 ANTI VANDAL SCREWS 2 PCS |  |

For detailed installation instructions, please consult the manual : [30216\\_XXX0\\_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Ground mounting boxes



**30210 0010** LOGIC 190 R BOX

☐

Cutout dimension (mm): 300 x 230

Waterproof connection parts



**431 99 02** IP68 JUNCTION BOX 4P

☐

**21034 0150** IP68 Y-CONNECTOR 5P

☐

Other



**30210 0020** LOGIC 190 ANTI VANDAL SCREWS 2 PCS

☐

Notes: