




SOLI - 66 93018 MDL

27121 9310 W

AVAILABLE IN  
**BLACK** 27121 9310 B  
**WHITE** 27121 9310 W

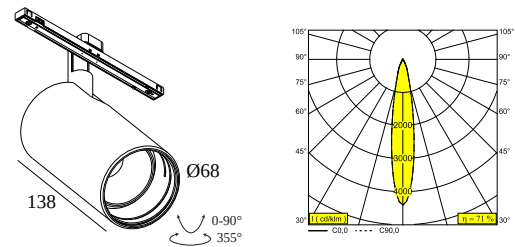

 [View on website](#)



General info

|                    |                                                                                             |
|--------------------|---------------------------------------------------------------------------------------------|
| LOCATION           | indoor                                                                                      |
| INSTALLATION       | Low voltage systems Low voltage system mounted                                              |
| INGRESS PROTECTION | IP20                                                                                        |
| WEIGHT (KG)        | 0.5                                                                                         |
| ADJUSTABILITY      | 0° to 90° swiveling, 360° rotatable                                                         |
| INFORMATION        | REFLECTOR SP-18°<br>EXCL.LED POWER SUPPLY 48V-DC<br>Optional REFLECTORS 30° & 45° available |

Electrical info

|              |                                    |
|--------------|------------------------------------|
| ELECTRICAL   | 48V-DC                             |
| CLASS        | III                                |
| DIM TYPE     | MDL = 1-10V or DALI or push button |
| ENERGY CLASS | E                                  |
| CERTIFICATES | CB, ENEC, LCA                      |

Lightsource info

|                             |                                                  |
|-----------------------------|--------------------------------------------------|
| LIGHTSOURCE NAME            | LED                                              |
| LIGHTSOURCE                 | LED array 21W / CRI>90 (R9: 52) / 3000K / 2463lm |
| TM-30 VALUES                | rf: 90 / Rg: 99                                  |
| SDCM                        | SDCM1                                            |
| RISKGROUP                   | RG1                                              |
| LM80                        | L90B10 > 50000                                   |
| BEAMANGLE                   | 18°                                              |
| LED TECHNICS (LIGHT SOURCE) | 2463lm // 21W // 117lm/W                         |
| LED TECHNICS (LUMINAIRE)    | 1759lm // 24,2W // 73lm/W                        |

Requirements

SPY 66 TUBE  
LED POWER SUPPLY 48V-DC

Options

DIMMABLE MODULATOR

Accessories

HONEYCOMB 57  
SPREAD LENS 57  
LINEAR SPREAD LENS 57  
SOFTENING LENS 57  
GLASS SBL 57

For detailed installation instructions, please consult the manual : [27121\\_XXX0\\_HAND.pdf](#)


### FINISH YOUR SPECIFICATION

#### SMART 48

#### # of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.


Min current | Max current



**300 90 011** SMART 48 MODULATOR DIM9

8

Dimtype: 1-10V or DALI or push button



**300 90 012** SMART 48 MODULATOR WD

8


Dimtype: WDL = wireless dimmable

#### LED power supplies

#### # of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.


Min current | Max current



**300 89 48 100** LED POWER SUPPLY 48V-DC / 100W DIN

4


Dimtype: non-dimmable



**300 89 48 240** LED POWER SUPPLY 48V-DC / 240W DIN

10

Dimtype: non-dimmable



**21012 0230** LED POWER SUPPLY 48V-DC / 100W

4


Dimtype: non-dimmable

Cutout dimension (mm): 40

# DELTALIGHT

## SOLI - 66 93018 MDL

27121 9310 W




**21012 0240** LED POWER SUPPLY 48V-DC / 200W

8 ☐

Dimtype: non-dimmable

Cutout dimension (mm): 40

### Light altering devices




**24611 0150 B** HONEYCOMB 57 SINGLE USE B

☐




**24611 0160** GLASS SBL 57

☐




**24611 0170** LINEAR SPREAD LENS 57

☐




**24611 0190** SOFTENING LENS 57

☐



**24611 0200** SPREAD LENS 57

☐



**24611 0210 B** HONEYCOMB 57 DOUBLE USE B

☐

### Finish your product



**24611 0100 B** SPY 66 TUBE B

☐

**24611 0100 FBR** SPY 66 TUBE FBR

☐

# DELTALIGHT

## SOLI - 66 93018 MDL


27121 9310 W

|                      |                |                          |
|----------------------|----------------|--------------------------|
| <b>24611 0100 FG</b> | SPY 66 TUBE FG | <input type="checkbox"/> |
| <b>24611 0100 GC</b> | SPY 66 TUBE GC | <input type="checkbox"/> |
| <b>24611 0100 W</b>  | SPY 66 TUBE W  | <input type="checkbox"/> |

### Replaceable reflector / lens

|                                                                                     |                                        |                          |
|-------------------------------------------------------------------------------------|----------------------------------------|--------------------------|
|    | <b>24611 0220</b> SPY 66 REFLECTOR 18° | <input type="checkbox"/> |
|   | <b>24611 0230</b> SPY 66 REFLECTOR 30° | <input type="checkbox"/> |
|  | <b>24611 0240</b> SPY 66 REFLECTOR 45° | <input type="checkbox"/> |

## COMPATIBLE COMPOSABLES

| SOLISCAPE profile                                                                                                         | Available Colours                                      |
|---------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|
| <br><b>27111 0020</b> SOLI - PROFILE 2m | <input checked="" type="radio"/> <input type="radio"/> |
| <br><b>27111 0030</b> SOLI - PROFILE 3m | <input checked="" type="radio"/> <input type="radio"/> |

Notes: