

# DOT.COM WALLWASH



Specification	Dot.Com WW PC/ON	Dot.Com WW TR
LED Type:	LEDflex	LEDflex
Installation:	Surface / suspended	Trimless recessed
Body/Extrusion:	Anodized aluminum	Anodized aluminum
Endcaps:	Aluminum	Aluminum
Finish:	Black / White	Black
Lens:	Sandblasted polycarbonate	Sandblasted polycarbonate

**Listing**  
ETL certified to US and Canadian safety standards  
**Warranty**  
5-year limited warranty

Performance	LP Static CCT	MP Static CCT	FP Static CCT	HP Static CCT	Soft Dim	Tunable White	RGB
CCT Options:	2700K, 3000K, 3500K, 4000K				3000-1800K	2700-5700K	RGB
CRI:	90+				90+	90+	90+
*Power:	1.5W/ft	3.1W/ft	4.6W/ft	6.1W/ft	5.6W/ft	5.9W/ft	3.4W/ft
Delivered Lumens:	100 lm/ft	190 lm/ft	322 lm/ft	446 lm/ft	267 lm/ft	204 lm/ft	R: 48 lm/ft G: 170 lm/ft B: 39 lm/ft
Maximum per 96W Driver:	61' 11/16"	31' 15/32"	20' 11/16"	15' 3/4"	16' 13/32"	33'	28' 17/32"
LED Cut Length:	2"	1 5/16"	2 7/16"	2"	2 7/16"	2 13/16"	2"
Damp Rated (IP20) Option:	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Wet Rated (IP65) Option:	No	No	No	No	No	No	No
McAdam Step:	3			2			
LED Maintenance:	L70>40,000h			L70>60,000h			
Voltage:	24V						
Dimming:	Standard 0-10V dim 120-277V (1%), FE ELV dim 120V (1%)						

Data in chart reflects 3000K/90 CRI values unless otherwise noted.  
For emergency lighting, inverter system is by others. Consult factory for more information.

## Ordering

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: P-DTC-ON-B-RMTD1-WW30FPD-R



Body Type	Install	Body Finish	Hardware Finish (1)	Application	Controls	Optic	CCT	Power*	Rating	Layout	Length
P-DTC Dot.Com Profile	PC Pendant, 5' cable suspended	B Black	B Black	PB Power Box	D1 0-10V dim 120-277V	WW Wallwash	27 2700K	LP Low Power	D Damp	S Straight run <118"	Nominal length in inches
		W White	W White				30 3000K	MP Medium Power			
							35 3500K	FP Full Power			
	ON Surface	B Black	X No finished hardware	RMT Remote Power Supply Round coverplate for 4" junction box at power drops	D8 FE ELV dim 120V		40 4000K	HP High Power		SJ Straight run >118" (joined bodies)	
		W White					SD 3000- 1800K	SP Standard Power		L L-Shape (2-sided)	
							CT DMX512-A / RDM 4-channel	WW Wallwash		TW 2700- 5700K	
TR Recessed	B Black					RGB Full color			R Rectangle (4-sided)		
										C Custom	

1. Applies to coverplate or PB (power box).


## Configuration

Example: C-DTC-SF-108-C90-92-C90-108-C90-92-C90 (Rectangle)

Body Type	Installation	Length	Connection	Length	Connection	Length	Connection
<b>C-DTC</b> Dot.Com Profile	<b>PC</b> Pendant, suspended  <b>ON</b> Surface mounted  <b>TR</b> Recessed	Nominal length in inches  Straight run <118"	<b>C90</b> 90° joiner bracket  <b>S180</b> 180° joiner bracket	Nominal length in inches  Straight run <118"	<b>C90</b> 90° joiner bracket  <b>S180</b> 180° joiner bracket	Nominal length in inches  Straight run <118"	<b>C90</b> 90° joiner bracket  <b>S180</b> 180° joiner bracket




Continue for all sections / connections for each run.




## Finish Options

### DOT.COM WW PC/ON




### DOT.COM WW TR

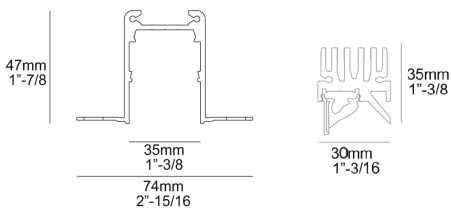

## Photometric Data

### FULL POWER STATIC CCT




**Installation Options**

**REMOTE DRIVER (With Controls D8)**

A: 12-1/8" x B: 1"-1/4" x C: 2"-3/8"  
 A: 307.34mm x B: 32.26mm x C: 59.94mm


- For Remote application
- ETL Listed
- Damp rated

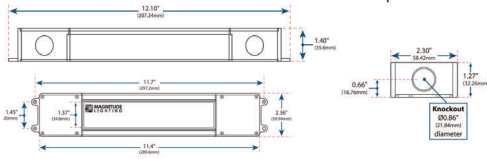

**REMOTE DRIVER (With Controls D1)**

A: 12" x B: 2"-7/8" x C: 4"-1/4"  
 A: 305mm x B: 72mm x C: 108mm


- For Remote application
- ETL Listed
- Damp rated




**CT**

A: 12" x B: 2"-7/8" x C: 4"-1/4"  
 A: 305mm x B: 72mm x C: 108mm

- For Remote application
- ETL Listed
- Damp rated

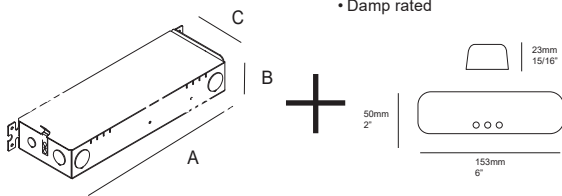

**POWER BOX**



NOTE: Option for Installation PC only

**Driver Options**

**D1**

- Dimming Control 0-10V
- Dimming Range 10-100%
- Dim to off yes
- Power Factor @ Full Load >0.95
- Efficiency @ Full Load ≥90
- THD @ Full Load <10%

**D8**

- Dimming Control Phase Control
- Dimming Range 1-100%
- Dim to off yes
- Power Factor @ Full Load >0.95
- Efficiency @ Full Load ≥90
- THD @ Full Load <10%

**CT**

- Dimming Control DMX / DALI
- Dimming Range 0-100%
- LED Outputs 4
- Power Factor @ Full Load >0.95
- Efficiency @ Full Load ≥90
- THD @ Full Load <10%

As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.