




ENTERO RD-S HE 92740

28485 9230 FW

AVAILABLE IN
BLACK 28485 9230 B
FULL WHITE 28485 9230 FW
GOLD COLOURED 28485 9230 GC

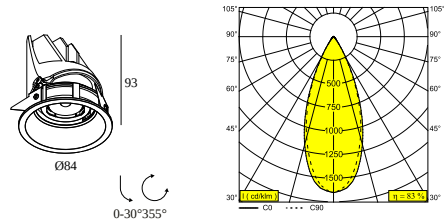

[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - 76
RECESSED DEPTH (MM)	100
THICKNESS OF MOUNTING SURFACE (MM)	max.16
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.25
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	LENS WFL-40° EXCL.LED POWER SUPPLY 350mA-DC

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	D
CERTIFICATES	CB, ENEC, EPD

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 6W / CRI>90 (R9: 50) / 2700K / 905lm
TM-30 VALUES	rf: 96 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	40°
LED TECHNICS (LIGHT SOURCE)	905lm // 6W // 150lm/W
LED TECHNICS (LUMINAIRE)	771lm // 6,9W // 112lm/W

Remarks
High Efficacy : > 100lm/W

Requirements
LED POWER SUPPLY 350mA-DC DIM

Options
ENTERO RD-S MOUNTING SET S2

DELTALIGHT

ENTERO RD-S HE 92740


28485 9230 FW

For detailed installation instructions, please consult the manual : [28485_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-
 Stucanet	-
 Wood	-
 Concrete	 28500 0190 - ENTERO RD-S MOUNTING SET S2 Required
 Concrete + plaster	 28500 0190 - ENTERO RD-S MOUNTING SET S2 Required
 Lintel + plaster	 28500 0190 - ENTERO RD-S MOUNTING SET S2 Required
 Hollow-core slab	 28500 0190 - ENTERO RD-S MOUNTING SET S2 Required
 Hollow-core slab + plaster	 28500 0190 - ENTERO RD-S MOUNTING SET S2 Required
 Stretched ceiling	-

FINISH YOUR SPECIFICATION

Emergency units
 21032 0270 B EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER B ☐
Cutout dimension (mm): 27
21032 0270 W EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER W ☐

DELTALIGHT

ENTERO RD-S HE 92740

28485 9230 FW


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 90 91 LED POWER SUPPLY 350mA-DC / 15W

2(1)

☐

Dimtype: non-dimmable

Cutout dimension (mm): 40




300 90 110 LED POWER SUPPLY 350mA-DC / 10W DIM8

1

☐

Dimtype: mains (phase cut-off)

Cutout dimension (mm): 42




300 90 116 LED POWER SUPPLY 350mA-DC / 18W DIM8

2->2

☐

Dimtype: mains (phase cut-off)

Cutout dimension (mm): 55



21012 0515 LED POWER SUPPLY MULTI POWER DIM5

1(1)

☐

Dimtype: DALI

Cutout dimension (mm): 55




21012 0520 LED POWER SUPPLY 350mA-DC / 8W

1(0)

☐

Dimtype: non-dimmable

Cutout dimension (mm): 47



21012 0575 LED POWER SUPPLY MULTI POWER DIM5

2->3(2)

☐

Dimtype: DALI

Cutout dimension (mm): 55

Mounting set S2



28500 0190 ENTERO RD-S MOUNTING SET S2

☐

DELTALIGHT

ENTERO RD-S HE 92740

28485 9230 FW

Notes: