



DELTALIGHT

ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025

EPD HUB, HUB-6057

Published on 17.04.2026, last updated on 17.04.2026, valid until 17.04.2031

D-LINER 30 INF LOC1

Delta Light nv



This EPD is intended for business-to-business and/or business-to-consumer communication. Life Cycle Assessment study has been performed in accordance with the requirements of EN 15804, EPD Hub PCR version 1.2 (24 Mar 2025) and JRC characterization factors EF 3.1. The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

MANUFACTURER AND SITE

Manufacturer	Delta Light nv
Address	Muizelstraat 2, 8560 Wevelgem, Belgium
Contact details	sustainability@deltalight.com
Website	www.deltalight.com
Place of production	Delta Light N.V., Muizelstraat 2, 8560 Belgium
Place(s) of raw material origin	EU, Asia
Place(s) of installation and use	Worldwide
Period for data	FY2024

EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804:2012+A2:2019/AC:2021 and ISO 14025
PCR	EPD Hub Core PCR version 1.2, 24 Mar 2025 c-PCR EN 50693 for electronic and electrical products and systems
Sector	Electrical product
Category of EPD	Third party verified EPD
Parent EPD number	-
Scope of the EPD	Cradle to gate with options, A4-A5, B6, and modules C1-C4, D
EPD author	Iris Heus, Delta Light N.V.
EPD verification	Independent verification of this EPD and data, according to ISO 14025: External verification
EPD verifier	Imane Uald Lamkaddam as an authorized verifier for EPD Hub

PRODUCT SPECIFICATION

Product name	D-LINER 30 INF LOC1
Product number / reference	32054 XXX5
GTIN (Global Trade Item Number)	-
NOBB (Norwegian Building Product Database)	-
A1-A3 Specific data (%)	18,6

PRODUCT CLASSIFICATION

Declared operating voltage, Volt	220-240V
Light source color temperature, Kelvin	3000K/4000K
Protection index for water and dust (IP)	IP20
Impact resistance index (IK)	-
Luminous flux, Lumen	2419
Electrical power, Watt	19,9
Luminous efficiency, Lm/W	121,5

PRODUCT DESCRIPTION

As part of our Linear Open Ceiling (LOC) range, D-Liner offers linear lighting solutions, designed to complement technical ceilings with acoustic and climate-control properties, such as Hunter Douglas' HeartFelt or DB30, as well as Interlu's SAPP. D-Liner is designed to provide office lighting and can be installed between the slats or can replace the slats. The range supports both general lighting through SBL or task specific lighting with Inform. With its UGR value of 16, D-Liner Inform minimizes glare. A light output of up to 143 lm/W is generated.

Specifications about the representative product: IP20 classification, class I (including power supply). Luminaire power up to 20W with LEDs on LED board. It has a length of 1116 mm, height of 32 mm and width of 30 mm. The main materials used are aluminium for the profile and endplate; polycarbonate for the optical elements; and stainless steel (INOX) for the fastening components, brackets and clips.

Further information can be found at www.deltalight.com.

ABOUT THE MANUFACTURER

Belgian and family-run since 1989, Delta Light provides premium lighting solutions for architecture. Quality products, designed for comfort and developed to last, that stand for simplicity and consistency but also show unexpected detail, from a visible screw to an ingenious touch. Because in everything Delta Light does, at project start or follow-up, we always seek to add a little extra care — and work with our partners, to guarantee we can bring their visions to completion.

ENVIRONMENTAL DATA SUMMARY

Declared unit	1 unit
Declared unit mass, kg	1,384
Mass of packaging, kg	0,264
Functional unit	Provide lighting that delivers an outgoing artificial luminous flux of 2419 lumens during a reference lifetime of 60 000 hours
Reference service life (years)	20,5
Assigned lifetime (hours)	60000
GWP-total, A1-A3 (kg CO ₂ e)	28
GWP-fossil, A1-A3 (kg CO ₂ e)	28,2
Secondary material, inputs (%)	61,4
Secondary material, outputs (%)	63,5
Total energy use, A1-A3 (kWh)	122
Net freshwater use, A1-A3 (m ³)	3,23E-01

LIFE CYCLE ASSESSMENT

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Assembly stage			Use stage							End of life stage				Beyond the system boundaries
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	
X	X	X	X	X	ND	ND	ND	ND	ND	X	ND	X	X	X	X	X	X
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demo.	Transport	Waste processing	Disposal	Reuse, Recovery, Recycling	

Not declared = ND.

CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. There is no neglected unit process more than 1% of total mass or energy flows. The module-specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

The production of capital equipment, construction activities, and infrastructure, maintenance and operation of capital equipment, personnel-related activities, energy and water use related to company management and sales activities are excluded.

VALIDATION OF DATA

Data collection for production, transport, and packaging was conducted using time and site-specific information, as defined in the general information section on page 1 and 2. Upstream process calculations rely on generic data as defined in the Bibliography section. Manufacturer-provided specific and generic data were used for the product's manufacturing stage. The analysis was performed in One Click LCA EPD Generator, with the 'Cut-Off, EN 15804+A2' allocation method, and characterization factors according to EN 15804:2012+A2:2019/AC:2021 and JRC EF 3.1.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

All allocations are done as per the reference standards and the applied PCR. In this study, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging materials	No allocation
Ancillary materials	Allocated by mass
Manufacturing energy and waste	Allocated by mass

PRODUCT & MANUFACTURING SITES GROUPING

Type of grouping	No grouping
Grouping method	Not applicable
Variation in GWP-fossil for A1-A3, %	-

PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	81,84	EU, Asia
Minerals	0	
Fossil materials	5,78	EU, Asia
Bio-based materials	0	
Electronic parts	12,38	EU, Asia

BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate:

Biogenic carbon content in product, kg C	0
Biogenic carbon content in packaging, kg C	0,108

SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA Luminaire EPD Generator v2.2.8. The LCA and EPD have been prepared according to the reference standards, EN 50693, and ISO 14040/14044. Ecoinvent v3.10.1/3.11/3.12 and One Click LCA databases were used as sources of environmental data. Allocation used in Ecoinvent 3.10.1/3.11/3.12 environmental data sources follow the methodology 'allocation, cut-off, EN 15804+A2'.

PRODUCT LIFE CYCLE

MANUFACTURING (A1-A3)

The product is made of metals, plastics, and electronic components. The component manufacturing happens outside of Delta Light with subcontractors (aluminum production, moulding, pcb production,...) and are then transported to Delta Light N.V. where they are assembled together. For each component, the transport distance to Delta Light is based on the supplier's country of origin. Vehicle capacity utilization volume factor is assumed to be 50%. The environmental impacts considered for the product stage include the manufacturing of raw materials and components, and the assembly to a complete luminaire at Delta Light, as well as packaging materials and other ancillary materials. Since raw materials and components are sourced from external suppliers and then assembled in Delta Light, no production losses are considered. The finished product is packed in cardboard packaging before being shipped to the installation site. Ancillary materials include tap water and rain water, with quantities determined based on factory-level data. Only wastewater is considered as manufacturing waste, and its quantity is likewise determined from factory-level data. Energy sources are natural gas and electricity. Electricity is supplied to the factory through a combination of on-site photovoltaic generation and purchased grid power. A market-based approach is applied to model the purchased electricity grid mix, which is fully sourced from renewable energy. The use of green energy in manufacturing is demonstrated through contractual instruments (GOs, RECs, etc), and its use is ensured throughout the validity period of this EPD.

TRANSPORT AND INSTALLATION (A4-A5)

Transportation distances from manufacturing sites to customer locations are based on sales volume-based weighted averages and defined according to the PCR. Average distance of transportation from production plant to building site is assumed as average 1340km, 592km, 179km for respectively boat, road and air transport. Vehicle capacity utilization volume factor is assumed to be 50%. Transportation does not cause losses as products are packaged properly. Also, volume capacity utilization factor is assumed to be 1 for the nested packaged products. Transportation impacts that occur from final products delivery to construction site (A4) cover fuel direct exhaust emissions, environmental impacts of fuel production, as well as related infrastructure emissions.

Environmental impacts from installation into the building include waste packaging materials (A5) and release of biogenic carbon dioxide from wood pallets and cardboard. The impacts of energy consumption and

the used ancillary materials during installation are considered negligible. EoL of the packaging references: Eurostat & PSR-0014 v2 (2023) for paperboard recycling (82%)/incineration (9%)/landfill (9%). Transportation distance to e-waste handling facility is estimated as 150 km and the transportation method is assumed to be lorry.

PRODUCT USE AND MAINTENANCE (B1-B7)

During the use phase (B6), the product emits light and consumes electricity from regional (EU, North America, Asia and rest of the world) electricity grid mix (location-based approach where emissions are based on the average grid emission factors of the region where the electricity is consumed). The percentage of electricity consumed in each region is based on the company's sales distribution across those regions.

The reference service life is based on the LM80 report of the LED which is 60 000 hours. When the luminaire is operated 8 hours a day, this will result in an RSL of approximately 20.5 years. The product is assumed to undergo replacement of selected components in intervals of time (20.5 years when the luminaire is operated for 8 hours a day) based on the lifespan of parts and components. This is to ensure that the product is fully functional throughout its lifetime. This is why B1-B5 is excluded and B7 is not applicable.

Impacts due to electricity production include direct emissions to air, transformation and transmission losses. No direct air, soil, or water impacts are assumed during the use phase and no waste is generated. Also, no water is consumed during the use phase.


This EPD complies with the additional requirements for products using energy in module B6 of the use stage and permanently installed in buildings or infrastructure, according to EN 15804+A2, ECO Platform Standards, and the applicable PCRs.

PRODUCT END OF LIFE (C1-C4, D)

Consumption of energy and natural resources in demolition process is assumed to be negligible. It is assumed that the waste is collected separately and transported to the waste treatment centre. The transport distance is 150 km while the transportation method is assumed to be lorry (C2). According to EN 50693:2019, the sequence of treatment operations occurring to the product shall include de-pollution, fractions separation and preparation (dismantling, crushing, shredding, sorting), recycling, other material recovery, energy recovery and disposal. In this study, the default values from table G.4 of EN 50693 is used for treating materials in different waste treatment methods. Due to the material and energy recovery potential of parts in the lighting system, the end-of-life product is converted into recycled raw materials, while the energy recovered from incineration displaces electricity and heat production (D). The benefits and

loads of incineration and recycling are included in Module D. For aluminium 70% recovery rate and 30% disposal rate. For Plastics 50% energy recovery rate and 50% disposal rate. For stainless steel 80% recovery rate and 20% disposal rate. For copper 60% disposal rate and 40% disposal rate. Packaging waste is not included in the End of Life stages (C3–C4). All impacts related to packaging disposal are instead accounted for in stage A5 (installation).

LIFE CYCLE FLOW DIAGRAM

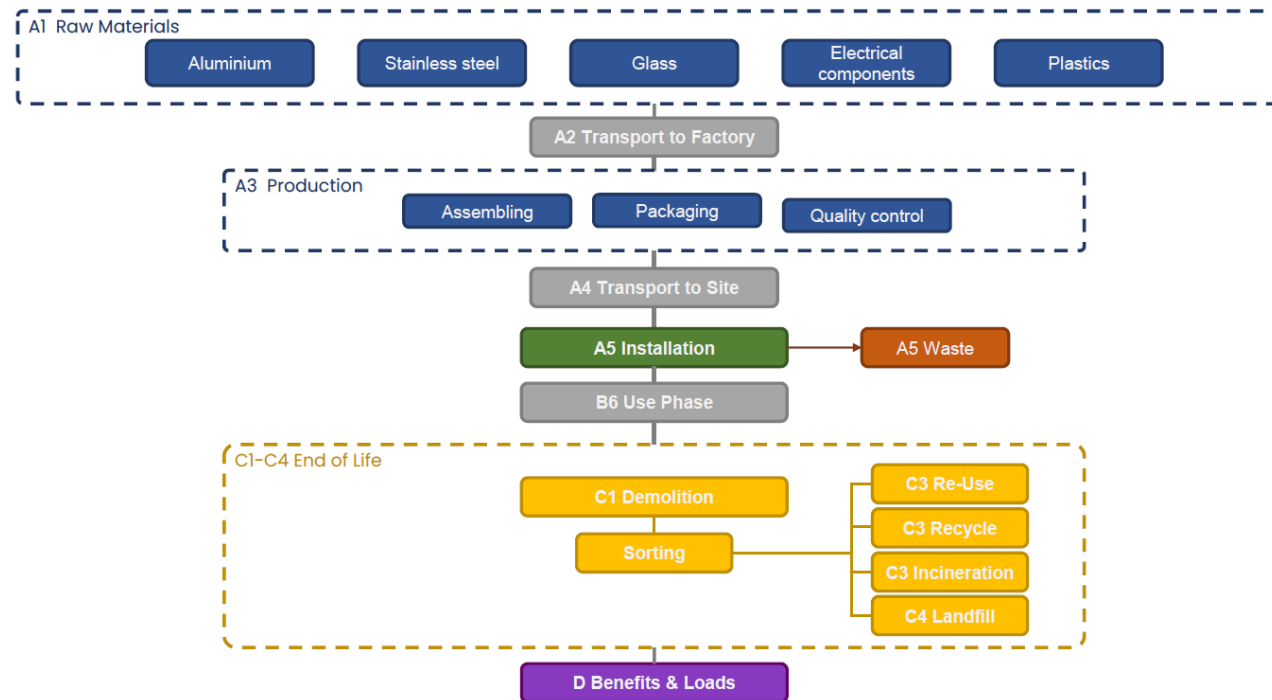

All estimations and assumptions regarding the cut off criteria and the allocation are declared in the part “Cut-off Criteria except the estimations/assumptions below:

- Module A2, A4 & C2: Vehicle capacity utilization volume factor is assumed to be 50%. It may vary but as the role of transportation emission in total results is small, the variety in load is assumed to be negligible. Empty returns are not considered as it is assumed that return trip is used by transportation companies to serve the needs of other clients.
- Module A4: Transportation does not cause losses as products are packaged properly. Also, volume capacity utilization factor is assumed to be 1 for the nested packaged products. Additionally, transportation distances are based on a sales volume-based weighted average and a lorry is the assumed vehicle type used.
- Module B6: The product is assumed to undergo replacement of selected components in intervals of time (51 years when the luminaire is operated for 8 hours a day) based on the lifespan of parts and components, so the product is assumed to be fully functional throughout its lifetime. Therefore, only the use phase B6 is considered, B4 is not considered.
- Module C2: Transportation distance to e-waste handling facility is estimated as 150 km and the transportation method is assumed as lorry.
- Module C3, C4, D: The product undergoes dismantling, and the parts are sorted into metals, plastics, glass and electronics. The waste treatment percentages based on EN 50693 are assumed to be applicable. Module C3 accounts for energy and resource inputs for sorting and treating these waste streams for recycling and incineration with energy recovery. Ash from recycling processes is negligible. The recycled end-of-life materials are assumed to serve as secondary raw materials in manufacturing, while incinerated materials displace the need for electricity and heat production.

ENVIRONMENTAL IMPACT DATA, RESULTS PER DECLARED UNIT

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	2,60E+01	3,19E-01	1,67E+00	2,80E+01	3,74E-01	4,16E-01	ND	ND	ND	0,00E+00	ND	5,18E+02	ND	0,00E+00	4,00E-02	9,50E-02	4,16E-02	-4,95E+00
GWP – fossil	kg CO ₂ e	2,58E+01	3,19E-01	2,05E+00	2,82E+01	3,74E-01	1,45E-02	ND	ND	ND	0,00E+00	ND	5,15E+02	ND	0,00E+00	4,00E-02	9,52E-02	4,16E-02	-4,95E+00
GWP – biogenic	kg CO ₂ e	3,80E-02	5,38E-05	-3,96E-01	-3,58E-01	4,56E-05	4,01E-01	ND	ND	ND	0,00E+00	ND	8,28E-01	ND	0,00E+00	8,74E-06	-2,19E-04	-1,70E-05	-2,30E-03
GWP – LULUC	kg CO ₂ e	9,88E-02	1,00E-04	1,14E-02	1,10E-01	7,66E-05	7,67E-06	ND	ND	ND	0,00E+00	ND	1,25E+00	ND	0,00E+00	1,77E-05	4,60E-05	1,45E-05	-1,11E-03
Ozone depletion pot.	kg CFC ₁₁ e	1,24E-06	5,82E-09	8,76E-08	1,34E-06	5,68E-09	1,55E-10	ND	ND	ND	0,00E+00	ND	6,38E-06	ND	0,00E+00	5,59E-10	3,39E-10	1,84E-10	-1,91E-08
Acidification potential	mol H ⁺ e	2,07E-01	2,06E-03	3,85E-03	2,13E-01	2,05E-03	5,63E-05	ND	ND	ND	0,00E+00	ND	2,79E+00	ND	0,00E+00	1,33E-04	3,17E-04	6,81E-05	-7,11E-02
EP-freshwater ²⁾	kg Pe	3,31E-02	1,57E-05	2,65E-04	3,34E-02	1,24E-05	2,17E-06	ND	ND	ND	0,00E+00	ND	3,56E-01	ND	0,00E+00	3,11E-06	1,71E-05	1,72E-06	-3,79E-03
EP-marine	kg Ne	3,45E-02	6,25E-04	1,43E-03	3,65E-02	6,98E-04	5,16E-05	ND	ND	ND	0,00E+00	ND	4,82E-01	ND	0,00E+00	4,32E-05	7,51E-05	4,08E-05	-6,94E-03
EP-terrestrial	mol Ne	3,74E-01	6,87E-03	1,12E-02	3,92E-01	7,65E-03	1,79E-04	ND	ND	ND	0,00E+00	ND	4,59E+00	ND	0,00E+00	4,70E-04	8,05E-04	2,92E-04	-7,49E-02
POCP (“smog”) ³⁾	kg NMVOCe	1,10E-01	2,34E-03	4,60E-03	1,17E-01	2,48E-03	7,16E-05	ND	ND	ND	0,00E+00	ND	1,44E+00	ND	0,00E+00	1,86E-04	2,33E-04	8,92E-05	-2,26E-02
ADP-minerals & metals ⁴⁾	kg Sbe	8,94E-03	6,02E-07	7,70E-06	8,94E-03	3,67E-07	7,84E-08	ND	ND	ND	0,00E+00	ND	5,14E-03	ND	0,00E+00	1,31E-07	1,48E-06	2,70E-08	-3,83E-04
ADP-fossil resources	MJ	3,38E+02	4,44E+00	4,58E+01	3,89E+02	5,07E+00	1,59E-01	ND	ND	ND	0,00E+00	ND	9,58E+03	ND	0,00E+00	5,61E-01	4,06E-01	1,62E-01	-5,05E+01
Water use ⁵⁾	m ³ e depr.	8,25E+00	1,75E-02	4,44E-01	8,71E+00	1,28E-02	3,50E-03	ND	ND	ND	0,00E+00	ND	2,36E+02	ND	0,00E+00	2,60E-03	1,08E-02	4,34E-03	-4,95E-01

1) GWP = Global Warming Potential. 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e. 3) POCP = Photochemical ozone formation. 4) ADP = Abiotic depletion potential. 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	1,32E-06	2,16E-08	3,02E-08	1,37E-06	1,35E-08	9,25E-10	ND	ND	ND	0,00E+00	ND	1,73E-05	ND	0,00E+00	3,17E-09	4,14E-09	1,27E-09	-2,85E-07
Ionizing radiation ⁶⁾	kBq U235e	2,55E+00	3,99E-03	8,33E-01	3,39E+00	2,40E-03	6,09E-04	ND	ND	ND	0,00E+00	ND	2,19E+02	ND	0,00E+00	4,54E-04	2,15E-03	2,32E-04	-2,81E-01
Ecotoxicity (freshwater)	CTUe	6,78E+02	4,23E-01	4,38E+00	6,83E+02	3,85E-01	1,11E+00	ND	ND	ND	0,00E+00	ND	1,64E+03	ND	0,00E+00	8,88E-02	3,19E-01	2,56E+01	-2,98E+01
Human toxicity, cancer	CTUh	1,90E-08	4,56E-11	3,24E-10	1,94E-08	3,74E-11	7,37E-12	ND	ND	ND	0,00E+00	ND	1,34E-07	ND	0,00E+00	6,80E-12	2,86E-11	1,93E-11	-4,60E-09
Human tox. non-cancer	CTUh	1,12E-06	2,83E-09	9,32E-09	1,13E-06	3,56E-09	3,99E-10	ND	ND	ND	0,00E+00	ND	7,10E-06	ND	0,00E+00	3,51E-10	1,68E-09	1,21E-09	-3,51E-07
SQP ⁷⁾	-	1,13E+02	3,01E+00	1,28E+01	1,29E+02	1,77E+00	1,06E-01	ND	ND	ND	0,00E+00	ND	2,02E+03	ND	0,00E+00	3,35E-01	5,75E-01	2,30E-01	-1,62E+01

6) EN 15804+A2 disclaimer for Ionizing radiation, human health. This impact category deals mainly with the eventual impact of low-dose ionizing radiation on the human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon, and from some construction materials is also not measured by this indicator. 7) SQP = Land use related impacts/soil quality.

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁸⁾	MJ	5,06E+01	5,45E-02	2,85E+00	5,35E+01	3,52E-02	-4,28E+00	ND	ND	ND	0,00E+00	ND	2,23E+03	ND	0,00E+00	7,70E-03	6,01E-02	3,78E-03	-1,46E+00
Renew. PER as material	MJ	0,00E+00	0,00E+00	3,38E+00	3,38E+00	0,00E+00	-3,38E+00	ND	ND	ND	0,00E+00	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Total use of renew. PER	MJ	5,06E+01	5,45E-02	6,24E+00	5,69E+01	3,52E-02	-7,67E+00	ND	ND	ND	0,00E+00	ND	2,23E+03	ND	0,00E+00	7,70E-03	6,01E-02	3,78E-03	-1,46E+00
Non-re. PER as energy	MJ	3,36E+02	4,44E+00	4,59E+01	3,86E+02	5,07E+00	1,59E-01	ND	ND	ND	0,00E+00	ND	9,58E+03	ND	0,00E+00	5,61E-01	-9,09E-01	-8,14E-01	-5,03E+01
Non-re. PER as material	MJ	2,06E+00	0,00E+00	1,11E-02	2,07E+00	0,00E+00	-1,11E-02	ND	ND	ND	0,00E+00	ND	0,00E+00	ND	0,00E+00	0,00E+00	-1,18E+00	-8,77E-01	0,00E+00
Total use of non-re. PER	MJ	3,38E+02	4,44E+00	4,59E+01	3,89E+02	5,07E+00	1,48E-01	ND	ND	ND	0,00E+00	ND	9,58E+03	ND	0,00E+00	5,61E-01	-2,09E+00	-1,69E+00	-5,03E+01
Secondary materials	kg	8,49E-01	0,00E+00	0,00E+00	8,49E-01	0,00E+00	0,00E+00	ND	ND	ND	0,00E+00	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Renew. secondary fuels	MJ	3,38E-03	1,67E-05	2,46E-02	2,80E-02	9,96E-06	1,29E-06	ND	ND	ND	0,00E+00	ND	1,12E-02	ND	0,00E+00	3,21E-06	2,02E-05	2,33E-06	-1,67E-04
Non-ren. secondary fuels	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	0,00E+00	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of net fresh water	m ³	3,12E-01	5,07E-04	1,07E-02	3,23E-01	3,94E-04	-2,35E-05	ND	ND	ND	0,00E+00	ND	7,19E+00	ND	0,00E+00	7,44E-05	2,55E-04	-4,94E-04	-2,39E-02

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	2,31E+00	5,20E-03	4,99E-02	2,36E+00	4,24E-03	1,21E-03	ND	ND	ND	0,00E+00	ND	3,89E+01	ND	0,00E+00	9,78E-04	4,12E-03	3,18E-02	-1,07E+00
Non-hazardous waste	kg	7,56E+01	1,01E-01	6,90E+00	8,26E+01	7,97E-02	1,70E-01	ND	ND	ND	0,00E+00	ND	1,74E+03	ND	0,00E+00	1,83E-02	1,11E-01	1,23E+00	-1,61E+01
Radioactive waste	kg	8,10E-04	9,86E-07	1,98E-04	1,01E-03	5,84E-07	1,54E-07	ND	ND	ND	0,00E+00	ND	5,56E-02	ND	0,00E+00	1,11E-07	5,28E-07	5,70E-08	-6,78E-05

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for reuse	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	0,00E+00	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling	kg	0,00E+00	0,00E+00	5,81E-03	5,81E-03	0,00E+00	2,16E-01	ND	ND	ND	0,00E+00	ND	0,00E+00	ND	0,00E+00	0,00E+00	8,79E-01	0,00E+00	0,00E+00
Materials for energy rec	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	0,00E+00	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,22E-01	ND	ND	ND	0,00E+00	ND	0,00E+00	ND	0,00E+00	0,00E+00	3,31E-01	0,00E+00	0,00E+00
Exported energy: Electricity	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,13E-02	ND	ND	ND	0,00E+00	ND	0,00E+00	ND	0,00E+00	0,00E+00	1,39E-01	0,00E+00	0,00E+00
Exported energy: Heat	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	6,41E-02	ND	ND	ND	0,00E+00	ND	0,00E+00	ND	0,00E+00	0,00E+00	1,92E-01	0,00E+00	0,00E+00

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ e	2,26E+01	3,17E-01	2,06E+00	2,50E+01	3,72E-01	4,82E-02	ND	ND	ND	0,00E+00	ND	5,14E+02	ND	0,00E+00	3,98E-02	9,52E-02	4,15E-02	-4,92E+00
Ozone depletion Pot.	kg CFC ₁₁ e	1,27E-06	4,62E-09	7,23E-08	1,35E-06	4,51E-09	1,26E-10	ND	ND	ND	0,00E+00	ND	5,39E-06	ND	0,00E+00	4,47E-10	2,84E-10	1,49E-10	-1,77E-08
Acidification	kg SO ₂ e	1,54E-01	1,60E-03	2,97E-03	1,58E-01	1,56E-03	4,33E-05	ND	ND	ND	0,00E+00	ND	2,36E+00	ND	0,00E+00	1,02E-04	2,55E-04	4,97E-05	-6,18E-02
Eutrophication	kg PO ₄ ³ e	5,32E-02	2,68E-04	1,02E-03	5,45E-02	2,76E-04	3,95E-05	ND	ND	ND	0,00E+00	ND	2,94E-01	ND	0,00E+00	2,48E-05	3,85E-05	2,35E-05	-3,59E-03
POCP (“smog”)	kg C ₂ H ₄ e	8,42E-03	1,07E-04	2,98E-04	8,82E-03	1,07E-04	1,14E-05	ND	ND	ND	0,00E+00	ND	1,29E-01	ND	0,00E+00	9,15E-06	1,52E-05	4,46E-06	-3,31E-03
ADP-elements	kg Sbe	8,94E-03	5,88E-07	7,59E-06	8,95E-03	3,57E-07	7,66E-08	ND	ND	ND	0,00E+00	ND	5,12E-03	ND	0,00E+00	1,28E-07	1,48E-06	2,53E-08	-3,82E-04
ADP-fossil	MJ	2,53E+02	4,37E+00	3,07E+01	2,88E+02	5,03E+00	1,48E-01	ND	ND	ND	0,00E+00	ND	5,82E+03	ND	0,00E+00	5,54E-01	3,72E-01	1,59E-01	-4,60E+01

ADDITIONAL INDICATOR – GWP-GHG

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG ⁹⁾	kg CO ₂ e	2,59E+01	3,19E-01	2,06E+00	2,83E+01	3,74E-01	1,45E-02	ND	ND	ND	0,00E+00	ND	5,17E+02	ND	0,00E+00	4,00E-02	9,52E-02	4,16E-02	-4,95E+00

9) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. In addition, the characterisation factors for the flows - CH₄ fossil, CH₄ biogenic and Dinitrogen monoxide - were updated. This indicator is identical to the GWP-total of EN 15804:2012+A2:2019 except that the characterization factor for biogenic CO₂ is set to zero.

SCENARIO DOCUMENTATION

Manufacturing energy scenario documentation – A3

Scenario parameter	Value
Electricity data source and quality	Electricity, medium voltage, residual mix (Reference product: electricity, medium voltage)
Electricity kg CO2e / kWh	0.21
Renewable energy data source and quality	Electricity production, on-site photovoltaic generation
Electricity kg CO2e / kWh	0.092
District heating data source and quality	District heat, Wevelgem, Belgium, 2024
District heating kg CO2e / MJ	0.077

Transport to installation site scenario documentation - A4

Scenario parameter	Value						
List of fuel and vehicle types with corresponding average transport distance in km	<table border="1"> <tr> <td>Lorry >32 metric ton, EURO5</td><td>592</td></tr> <tr> <td>Container ship</td><td>1340</td></tr> <tr> <td>Aircraft</td><td>179</td></tr> </table>	Lorry >32 metric ton, EURO5	592	Container ship	1340	Aircraft	179
Lorry >32 metric ton, EURO5	592						
Container ship	1340						
Aircraft	179						
Capacity utilization (including empty return) %	50						
Bulk density of transported products / kg/m ³	8,72E+04						
Volume capacity utilization factor (factor: =1 or <1 or ≥1 for compressed or nested packaged products)	1						

Installation scenario documentation - A5 (Energy and waste materials)

Scenario parameter	Value
Ancillary materials for installation	Not applicable
Water use (kg)	0
Direct emissions to ambient air, soil and water (kg)	Not applicable
Corrugated board box production (kg)	0.264

Use stages scenario documentation - B4

Scenario information	Value
Replacement cycle / Number per RSL or year	0

Use stages scenario documentation - B6 Use of energy and water

Scenario information	Value															
Ancillary materials	Not applicable															
Net fresh water consumption	Not applicable															
Power consumption in W	19.9															
Sales-weighted distribution of low voltage regional electricity grid mix consumption	<table><tr><th>Region</th><th>Percentage</th><th>Electricity consumption (kWh)</th></tr><tr><td>EU</td><td>71 %</td><td>847.74</td></tr><tr><td>Asia</td><td>7.1 %</td><td>84.77</td></tr><tr><td>NA</td><td>10 %</td><td>119.40</td></tr><tr><td>Rest of world</td><td>11.9 %</td><td>142.09</td></tr></table>	Region	Percentage	Electricity consumption (kWh)	EU	71 %	847.74	Asia	7.1 %	84.77	NA	10 %	119.40	Rest of world	11.9 %	142.09
	Region	Percentage	Electricity consumption (kWh)													
	EU	71 %	847.74													
	Asia	7.1 %	84.77													
	NA	10 %	119.40													
Rest of world	11.9 %	142.09														
Period of use	20.5 years when the luminaire operates 8 hours a day															
Performance	Emits 2419 lumen during a reference lifetime of 60000 hours															

End-of-life scenario documentation – C1-4

Scenario information	Value
Collection process – kg collected separately	1.384
Collection process – kg collected with mixed construction waste	0
Recovery process – kg for re-use	0
Recovery process – kg for recycling	8.79E-01
Recovery process – kg for energy recovery	0
Disposal (total) – kg for final deposition	4.61E-01
Scenario assumptions e.g. transportation	Lorry, 16-32 metric ton, EURO5; 150 km

THIRD-PARTY VERIFICATION STATEMENT

EPD Hub declares that this EPD is verified in accordance with ISO 14025 by an independent, third-party verifier. The project report on the Life Cycle Assessment and the report(s) on features of environmental relevance are filed at EPD Hub. EPD Hub PCR and ECO Platform verification checklist are used.

EPD Hub is not able to identify any unjustified deviations from the PCR and EN 15804+A2 in the Environmental Product Declaration and its project report.

EPD Hub maintains its independence as a third-party body; it was not involved in the execution of the LCA or in the development of the declaration and has no conflicts of interest regarding this verification.

The company-specific data and upstream and downstream data have been examined as regards plausibility and consistency. The publisher is responsible for ensuring the factual integrity and legal compliance of this declaration.



Program assistant: Xinyuan Zhang



The software used in creation of this LCA and EPD is verified by EPD Hub to conform to the procedural and methodological requirements outlined in ISO 14025:2010, ISO 14040/14044, EN 15804+A2, and EPD Hub Core Product Category Rules and General Program Instructions.

[Verified tools](#)

Tool verifier: Hai Ha Nguyen

Tool verification validity: 28 March 2025 - 27 March 2028

ANNEX 1 – PEP EXTRAPOLATION COEFFICIENTS D-LINER LOC

Extrapolation rules have been calculated according to PSR-0014-ed2.0-EN-2023 07 13. The extrapolation coefficients are calculated at product level, with respect to the reference product 15933 XXX5.

The extrapolation coefficients were calculated in the following way:

- **Fabrication stage (A1-A3) extrapolation coefficient:**
Maximum value out of formulas described in 3.6.3 Extrapolation rules applied to fabrication stage (A1-A3)
- **Distribution stage (A4) extrapolation coefficient:**
Value out of formula described in 3.6.4 Extrapolation rules applied to distribution stage (A4)
- **Installation stage (A5) extrapolation coefficient:**
Value out of formula described in 3.6.5 Extrapolation rules applied to installation stage (A5)
- **Use stage (B1 – B7) extrapolation coefficient:**
Maximum value out of formulas described in 3.6.6. Extrapolation rules applied to use stage (B1 to B7) (B2 is not declared in our case, so the formula of B6 applies)
- **End of life stage (C1 to C4) extrapolation coefficient:**
Value out of formula described in 3.6.7. Extrapolation rules applied to end-of-life stage (C1 to C4)
- **Benefits (D) extrapolation coefficient:**
Maximum value out of formulas described in 3.6.8. Extrapolation rules applied to net benefits beyond the system boundaries stage (D) (optional)

The extrapolation at the level of the functional unit can be done according to the following formula:

$$\text{Extrapolation coefficient at the product level} \times \left(\frac{\text{Lighting output of reference product (lumen)}}{\text{Lighting output of product concerned (lumen)}} \right)$$

Data used in the calculation of extrapolation coefficients

Mass code	Description	Product weight	Packaging weight	Total weight	Control gear weight	Class	IP	Luminaire lumen	Luminaire power
32011 XXX0	D-LINER 19 INF LOC1 286 RD	0,197	0,099	0,296	0	III	IP20	769	5,8
32012 XXX5	D-LINER 19 INF LOC1 286 DIM5	0,403	0,121	0,524	0,113	I	IP20	769	5,8
32013 XXX0	D-LINER 19 INF LOC1 562 RD	0,321	0,096	0,417	0	III	IP20	1342	9,9
32014 XXX5	D-LINER 19 INF LOC1 562 DIM5	0,527	0,158	0,685	0,113	I	IP20	1342	9,9
32015 XXX0	D-LINER 19 INF LOC1 838 RD	0,443	0,133	0,576	0	III	IP20	2013	15
32016 XXX5	D-LINER 19 INF LOC1 838 DIM5	0,649	0,312	0,961	0,113	I	IP20	2013	15
32017 XXX0	D-LINER 19 INF LOC1 1114 RD	0,567	0,17	0,737	0	III	IP20	2684	19,9
32018 XXX5	D-LINER 19 INF LOC1 1114 DIM5	0,773	0,232	1,005	0,113	I	IP20	2684	19,9
32019 XXX0	D-LINER 19 INF LOC1 1390 RD	0,717	0,215	0,932	0	III	IP20	3355	24,8
32020 XXX5	D-LINER 19 INF LOC1 1390 DIM5	0,923	0,277	1,2	0,113	I	IP20	3355	24,8
32021 XXX0	D-LINER 19 INF LOC2 286 RD	0,197	0,099	0,296	0	III	IP20	769	5,8
32022 XXX5	D-LINER 19 INF LOC2 286 DIM5	0,403	0,121	0,524	0,113	I	IP20	769	5,8
32023 XXX0	D-LINER 19 INF LOC2 562 RD	0,321	0,096	0,417	0	III	IP20	1342	9,9
32024 XXX5	D-LINER 19 INF LOC2 562 DIM5	0,527	0,158	0,685	0,113	I	IP20	1342	9,9
32025 XXX0	D-LINER 19 INF LOC2 838 RD	0,443	0,133	0,576	0	III	IP20	2013	15
32026 XXX5	D-LINER 19 INF LOC2 838 DIM5	0,649	0,312	0,961	0,113	I	IP20	2013	15
32027 XXX0	D-LINER 19 INF LOC2 1114 RD	0,567	0,17	0,737	0	III	IP20	2684	19,9
32028 XXX5	D-LINER 19 INF LOC2 1114 DIM5	0,773	0,232	1,005	0,113	I	IP20	2684	19,9
32029 XXX0	D-LINER 19 INF LOC2 1390 RD	0,717	0,215	0,932	0	III	IP20	3355	24,8
32030 XXX5	D-LINER 19 INF LOC2 1390 DIM5	0,923	0,277	1,2	0,113	I	IP20	3355	24,8
32031 XXX0	D-LINER 19 SBL LOC1 420 RD	0,243	0,175	0,418	0	III	IP20	788	11,5
32032 XXX5	D-LINER 19 SBL LOC1 420 DIM5	0,315	0,151	0,466	0,113	I	IP20	788	11,5
32033 XXX0	D-LINER 19 SBL LOC1 620 RD	0,359	0,258	0,617	0	III	IP20	1162	17,2
32034 XXX5	D-LINER 19 SBL LOC1 620 DIM5	0,465	0,222	0,687	0,113	I	IP20	1162	17,2
32035 XXX0	D-LINER 19 SBL LOC1 820 RD	0,474	0,342	0,816	0	III	IP20	1575	23
32036 XXX5	D-LINER 19 SBL LOC1 820 DIM5	0,615	0,294	0,909	0,113	I	IP20	1575	23
32037 XXX0	D-LINER 19 SBL LOC1 1020 RD	0,59	0,425	1,015	0	III	IP20	1950	28,8
32038 XXX5	D-LINER 19 SBL LOC1 1020 DIM5	0,765	0,366	1,131	0,113	I	IP20	1950	28,8

32039 XXX0	D-LINER 19 SBL LOC1 1220 RD	0,706	0,508	1,214	0	III	IP20	2340	34,5
32040 XXX5	D-LINER 19 SBL LOC1 1220 DIM5	0,915	0,437	1,352	0,113	I	IP20	2340	34,5
32041 XXX0	D-LINER 19 SBL LOC2 420 RD	0,243	0,175	0,418	0	III	IP20	788	11,5
32042 XXX5	D-LINER 19 SBL LOC2 420 DIM5	0,315	0,151	0,466	0,113	I	IP20	788	11,5
32043 XXX0	D-LINER 19 SBL LOC2 620 RD	0,359	0,258	0,617	0	III	IP20	1162	17,2
32044 XXX5	D-LINER 19 SBL LOC2 620 DIM5	0,465	0,222	0,687	0,113	I	IP20	1162	17,2
32045 XXX0	D-LINER 19 SBL LOC2 820 RD	0,474	0,342	0,816	0	III	IP20	1575	23
32046 XXX5	D-LINER 19 SBL LOC2 820 DIM5	0,615	0,294	0,909	0,113	I	IP20	1575	23
32047 XXX0	D-LINER 19 SBL LOC2 1020 RD	0,59	0,425	1,015	0	III	IP20	1950	28,8
32048 XXX5	D-LINER 19 SBL LOC2 1020 DIM5	0,765	0,366	1,131	0,113	I	IP20	1950	28,8
32049 XXX0	D-LINER 19 SBL LOC2 1220 RD	0,706	0,508	1,214	0	III	IP20	2340	34,5
32050 XXX5	D-LINER 19 SBL LOC2 1220 DIM5	0,915	0,437	1,352	0,113	I	IP20	2340	34,5
32051 XXX0	D-LINER 30 INF LOC1 838 RD	1,038	0,286	1,324	0	III	IP20	1814	15
32052 XXX5	D-LINER 30 INF LOC1 838 DIM5	1,038	0,286	1,324	0,113	I	IP20	1814	15
32053 XXX0	D-LINER 30 INF LOC1 1114 RD	1,338	0,286	1,624	0	III	IP20	2495	19,9
32054 XXX5 (ref)	D-LINER 30 INF LOC1 1114 DIM5	1,384	0,264	1,648	0,113	I	IP20	2495	19,9
32055 XXX0	D-LINER 30 INF LOC1 1390 RD	1,638	0,286	1,924	0	III	IP20	3118	24,8
32056 XXX5	D-LINER 30 INF LOC1 1390 DIM5	1,638	0,286	1,924	0,113	I	IP20	3118	24,8
32064 XXX0	D-LINER 30 SBL LOC1 838 RD	0,705	0,212	0,917	0	III	IP20	1702	23
32065 XXX5	D-LINER 30 SBL LOC1 838 DIM5	0,911	0,285	1,196	0,113	I	IP20	1702	23
32066 XXX0	D-LINER 30 SBL LOC1 1114 RD	0,884	0,371	1,255	0	III	IP20	2127	28,8
32067 XXX5	D-LINER 30 SBL LOC1 1114 DIM5	1,089	0,218	1,307	0,113	I	IP20	2127	28,8
32068 XXX0	D-LINER 30 SBL LOC1 1390 RD	1,058	0,212	1,27	0	III	IP20	2553	34,5
32069 XXX5	D-LINER 30 SBL LOC1 1390 DIM5	1,264	0,253	1,517	0,113	I	IP20	2553	34,5
32070 XXX0	D-LINER 30 SBL LOC2 838 RD	0,715	0,215	0,93	0	III	IP20	1702	23
32071 XXX5	D-LINER 30 SBL LOC2 838 DIM5	0,921	0,275	1,196	0,113	I	IP20	1702	23
32072 XXX0	D-LINER 30 SBL LOC2 1114 RD	0,892	0,363	1,255	0	III	IP20	2127	28,8
32073 XXX5	D-LINER 30 SBL LOC2 1114 DIM5	1,099	0,22	1,319	0,113	I	IP20	2127	28,8
32074 XXX0	D-LINER 30 SBL LOC2 1390 RD	1,068	0,214	1,282	0	III	IP20	2553	34,5
32075 XXX5	D-LINER 30 SBL LOC2 1390 DIM5	1,274	0,255	1,529	0,113	I	IP20	2553	34,5

32076 XXX0	D-LINER 30 SBL LOC3 838 RD	0,727	0,218	0,945	0	III	IP20	1702	23
32077 XXX5	D-LINER 30 SBL LOC3 838 DIM5	0,933	0,739	1,672	0,113	I	IP20	1702	23
32078 XXX0	D-LINER 30 SBL LOC3 1114 RD	0,912	0,848	1,76	0	III	IP20	2127	28,8
32079 XXX5	D-LINER 30 SBL LOC3 1114 DIM5	1,111	0,941	2,052	0,113	I	IP20	2127	28,8
32080 XXX0	D-LINER 30 SBL LOC3 1390 RD	1,08	0,216	1,296	0	III	IP20	2553	34,5
32081 XXX5	D-LINER 30 SBL LOC3 1390 DIM5	1,286	0,257	1,543	0,113	I	IP20	2553	34,5
32082 XXX0	D-LINER 30 INF LOC2 838 RD	1,234	0,37	1,604	0	III	IP20	1871	15
32083 XXX5	D-LINER 30 INF LOC2 838 DIM5	1,234	0,37	1,604	0,113	I	IP20	1871	15
32084 XXX0	D-LINER 30 INF LOC2 1114 RD	1,534	0,37	1,904	0	III	IP20	2495	19,9
32085 XXX5	D-LINER 30 INF LOC2 1114 DIM5	1,534	0,37	1,904	0,113	I	IP20	2495	19,9
32086 XXX0	D-LINER 30 INF LOC2 1390 RD	1,834	0,37	2,204	0	III	IP20	3118	24,8
32087 XXX5	D-LINER 30 INF LOC2 1390 DIM5	1,834	0,37	2,204	0,113	I	IP20	3118	24,8
32088 XXX0	D-LINER 30 INF LOC3 838 RD	1,234	0,37	1,604	0	III	IP20	1871	15
32089 XXX5	D-LINER 30 INF LOC3 838 DIM5	1,234	0,37	1,604	0,113	I	IP20	1871	15
32090 XXX0	D-LINER 30 INF LOC3 1114 RD	1,534	0,37	1,904	0	III	IP20	2495	19,9
32091 XXX5	D-LINER 30 INF LOC3 1114 DIM5	1,534	0,37	1,904	0,113	I	IP20	2495	19,9
32092 XXX0	D-LINER 30 INF LOC3 1390 RD	1,834	0,37	2,204	0	III	IP20	3118	24,8
32093 XXX5	D-LINER 30 INF LOC3 1390 DIM5	1,834	0,37	2,204	0,113	I	IP20	3118	24,8

Applicable extrapolation coefficients for M-DOT.COM mass codes similar to the reference

		A1-A3	A4	A5	B6	C1-C4	D
Mass code	Extrapol. FU	MAXIMUM A1-A3	Distribution stage	Installation stage	Use stage	EOL stage	MAXIMUM D
32011 XXX0	3,244	0,375	0,180	0,375	0,583	0,180	0,375
32012 XXX5	3,244	1,000	0,318	0,458	0,291	0,318	1,000
32013 XXX0	1,859	0,364	0,253	0,364	0,995	0,253	0,364
32014 XXX5	1,859	1,000	0,416	0,598	0,497	0,416	1,000
32015 XXX0	1,239	0,504	0,350	0,504	1,508	0,350	0,504
32016 XXX5	1,239	1,182	0,583	1,182	0,754	0,583	1,182
32017 XXX0	0,930	0,644	0,447	0,644	2,000	0,447	0,644
32018 XXX5	0,930	1,000	0,610	0,879	1,000	0,610	1,000
32019 XXX0	0,744	0,814	0,566	0,814	2,492	0,566	0,814
32020 XXX5	0,744	1,049	0,728	1,049	1,246	0,728	1,049
32021 XXX0	3,244	0,375	0,180	0,375	0,583	0,180	0,375
32022 XXX5	3,244	1,000	0,318	0,458	0,291	0,318	1,000
32023 XXX0	1,859	0,364	0,253	0,364	0,995	0,253	0,364
32024 XXX5	1,859	1,000	0,416	0,598	0,497	0,416	1,000
32025 XXX0	1,239	0,504	0,350	0,504	1,508	0,350	0,504
32026 XXX5	1,239	1,182	0,583	1,182	0,754	0,583	1,182
32027 XXX0	0,930	0,644	0,447	0,644	2,000	0,447	0,644
32028 XXX5	0,930	1,000	0,610	0,879	1,000	0,610	1,000
32029 XXX0	0,744	0,814	0,566	0,814	2,492	0,566	0,814
32030 XXX5	0,744	1,049	0,728	1,049	1,246	0,728	1,049
32031 XXX0	3,166	0,663	0,254	0,663	1,156	0,254	0,663
32032 XXX5	3,166	1,000	0,283	0,572	0,578	0,283	1,000
32033 XXX0	2,147	0,977	0,374	0,977	1,729	0,374	0,977
32034 XXX5	2,147	1,000	0,417	0,841	0,864	0,417	1,000
32035 XXX0	1,584	1,295	0,495	1,295	2,312	0,495	1,295
32036 XXX5	1,584	1,114	0,552	1,114	1,156	0,552	1,114
32037 XXX0	1,279	1,610	0,616	1,610	2,894	0,616	1,610

32038 XXX5	1,279	1,386	0,686	1,386	1,447	0,686	1,386
32039 XXX0	1,066	1,924	0,737	1,924	3,467	0,737	1,924
32040 XXX5	1,066	1,655	0,820	1,655	1,734	0,820	1,655
32041 XXX0	3,166	0,663	0,254	0,663	1,156	0,254	0,663
32042 XXX5	3,166	1,000	0,283	0,572	0,578	0,283	1,000
32043 XXX0	2,147	0,977	0,374	0,977	1,729	0,374	0,977
32044 XXX5	2,147	1,000	0,417	0,841	0,864	0,417	1,000
32045 XXX0	1,584	1,295	0,495	1,295	2,312	0,495	1,295
32046 XXX5	1,584	1,114	0,552	1,114	1,156	0,552	1,114
32047 XXX0	1,279	1,610	0,616	1,610	2,894	0,616	1,610
32048 XXX5	1,279	1,386	0,686	1,386	1,447	0,686	1,386
32049 XXX0	1,066	1,924	0,737	1,924	3,467	0,737	1,924
32050 XXX5	1,066	1,655	0,820	1,655	1,734	0,820	1,655
32051 XXX0	1,375	1,083	0,803	1,083	1,508	0,803	1,083
32052 XXX5	1,375	1,083	0,803	1,083	0,754	0,803	1,083
32053 XXX0	1,000	1,083	0,985	1,083	2,000	0,985	1,083
32054 XXX5 (ref)	1,000	1,000	1,000	1,000	1,000	1,000	1,000
32055 XXX0	0,800	1,184	1,167	1,083	2,492	1,167	1,184
32056 XXX5	0,800	1,184	1,167	1,083	1,246	1,167	1,184
32064 XXX0	1,466	0,803	0,556	0,803	2,312	0,556	0,803
32065 XXX5	1,466	1,080	0,726	1,080	1,156	0,726	1,080
32066 XXX0	1,173	1,405	0,762	1,405	2,894	0,762	1,405
32067 XXX5	1,173	1,000	0,793	0,826	1,447	0,793	1,000
32068 XXX0	0,977	0,803	0,771	0,803	3,467	0,771	0,803
32069 XXX5	0,977	1,000	0,921	0,958	1,734	0,921	1,000
32070 XXX0	1,466	0,814	0,564	0,814	2,312	0,564	0,814
32071 XXX5	1,466	1,042	0,726	1,042	1,156	0,726	1,042
32072 XXX0	1,173	1,375	0,762	1,375	2,894	0,762	1,375
32073 XXX5	1,173	1,000	0,800	0,833	1,447	0,800	1,000
32074 XXX0	0,977	0,811	0,778	0,811	3,467	0,778	0,811
32075 XXX5	0,977	1,000	0,928	0,966	1,734	0,928	1,000

32076 XXX0	1,466	0,826	0,573	0,826	2,312	0,573	0,826
32077 XXX5	1,466	2,799	1,015	2,799	1,156	1,015	2,799
32078 XXX0	1,173	3,212	1,068	3,212	2,894	1,068	3,212
32079 XXX5	1,173	3,564	1,245	3,564	1,447	1,245	3,564
32080 XXX0	0,977	0,818	0,786	0,818	3,467	0,786	0,818
32081 XXX5	0,977	1,000	0,936	0,973	1,734	0,936	1,000
32082 XXX0	1,334	1,402	0,973	1,402	1,508	0,973	1,402
32083 XXX5	1,334	1,402	0,973	1,402	0,754	0,973	1,402
32084 XXX0	1,000	1,402	1,155	1,402	2,000	1,155	1,402
32085 XXX5	1,000	1,402	1,155	1,402	1,000	1,155	1,402
32086 XXX0	0,800	1,402	1,337	1,402	2,492	1,337	1,402
32087 XXX5	0,800	1,402	1,337	1,402	1,246	1,337	1,402
32088 XXX0	1,334	1,402	0,973	1,402	1,508	0,973	1,402
32089 XXX5	1,334	1,402	0,973	1,402	0,754	0,973	1,402
32090 XXX0	1,000	1,402	1,155	1,402	2,000	1,155	1,402
32091 XXX5	1,000	1,402	1,155	1,402	1,000	1,155	1,402
32092 XXX0	0,800	1,402	1,337	1,402	2,492	1,337	1,402
32093 XXX5	0,800	1,402	1,337	1,402	1,246	1,337	1,402

ANNEX 1 – PEP EXTRAPOLATION COEFFICIENTS D-LINER LOC

Extrapolation rules have been calculated according to PSR-0014-ed2.0-EN-2023 07 13. The extrapolation coefficients are calculated at product level, with respect to the reference product 15933 XXX5.

The extrapolation coefficients were calculated in the following way:

- **Fabrication stage (A1-A3) extrapolation coefficient:**
Maximum value out of formulas described in 3.6.3 Extrapolation rules applied to fabrication stage (A1-A3)
- **Distribution stage (A4) extrapolation coefficient:**
Value out of formula described in 3.6.4 Extrapolation rules applied to distribution stage (A4)
- **Installation stage (A5) extrapolation coefficient:**
Value out of formula described in 3.6.5 Extrapolation rules applied to installation stage (A5)
- **Use stage (B1 – B7) extrapolation coefficient:**
Maximum value out of formulas described in 3.6.6. Extrapolation rules applied to use stage (B1 to B7) (B2 is not declared in our case, so the formula of B6 applies)
- **End of life stage (C1 to C4) extrapolation coefficient:**
Value out of formula described in 3.6.7. Extrapolation rules applied to end-of-life stage (C1 to C4)
- **Benefits (D) extrapolation coefficient:**
Maximum value out of formulas described in 3.6.8. Extrapolation rules applied to net benefits beyond the system boundaries stage (D) (optional)

The extrapolation at the level of the functional unit can be done according to the following formula:

$$\text{Extrapolation coefficient at the product level} \times \left(\frac{\text{Lighting output of reference product (lumen)}}{\text{Lighting output of product concerned (lumen)}} \right)$$

Data used in the calculation of extrapolation coefficients

Mass code	Description	Product weight	Packaging weight	Total weight	Control gear weight	Class	IP	Luminaire lumen	Luminaire power
32011 XXX0	D-LINER 19 INF LOC1 286 RD	0,197	0,099	0,296	0	III	IP20	769	5,8
32012 XXX5	D-LINER 19 INF LOC1 286 DIM5	0,403	0,121	0,524	0,113	I	IP20	769	5,8
32013 XXX0	D-LINER 19 INF LOC1 562 RD	0,321	0,096	0,417	0	III	IP20	1342	9,9
32014 XXX5	D-LINER 19 INF LOC1 562 DIM5	0,527	0,158	0,685	0,113	I	IP20	1342	9,9
32015 XXX0	D-LINER 19 INF LOC1 838 RD	0,443	0,133	0,576	0	III	IP20	2013	15
32016 XXX5	D-LINER 19 INF LOC1 838 DIM5	0,649	0,312	0,961	0,113	I	IP20	2013	15
32017 XXX0	D-LINER 19 INF LOC1 1114 RD	0,567	0,17	0,737	0	III	IP20	2684	19,9
32018 XXX5	D-LINER 19 INF LOC1 1114 DIM5	0,773	0,232	1,005	0,113	I	IP20	2684	19,9
32019 XXX0	D-LINER 19 INF LOC1 1390 RD	0,717	0,215	0,932	0	III	IP20	3355	24,8
32020 XXX5	D-LINER 19 INF LOC1 1390 DIM5	0,923	0,277	1,2	0,113	I	IP20	3355	24,8
32021 XXX0	D-LINER 19 INF LOC2 286 RD	0,197	0,099	0,296	0	III	IP20	769	5,8
32022 XXX5	D-LINER 19 INF LOC2 286 DIM5	0,403	0,121	0,524	0,113	I	IP20	769	5,8
32023 XXX0	D-LINER 19 INF LOC2 562 RD	0,321	0,096	0,417	0	III	IP20	1342	9,9
32024 XXX5	D-LINER 19 INF LOC2 562 DIM5	0,527	0,158	0,685	0,113	I	IP20	1342	9,9
32025 XXX0	D-LINER 19 INF LOC2 838 RD	0,443	0,133	0,576	0	III	IP20	2013	15
32026 XXX5	D-LINER 19 INF LOC2 838 DIM5	0,649	0,312	0,961	0,113	I	IP20	2013	15
32027 XXX0	D-LINER 19 INF LOC2 1114 RD	0,567	0,17	0,737	0	III	IP20	2684	19,9
32028 XXX5	D-LINER 19 INF LOC2 1114 DIM5	0,773	0,232	1,005	0,113	I	IP20	2684	19,9
32029 XXX0	D-LINER 19 INF LOC2 1390 RD	0,717	0,215	0,932	0	III	IP20	3355	24,8
32030 XXX5	D-LINER 19 INF LOC2 1390 DIM5	0,923	0,277	1,2	0,113	I	IP20	3355	24,8
32031 XXX0	D-LINER 19 SBL LOC1 420 RD	0,243	0,175	0,418	0	III	IP20	788	11,5
32032 XXX5	D-LINER 19 SBL LOC1 420 DIM5	0,315	0,151	0,466	0,113	I	IP20	788	11,5
32033 XXX0	D-LINER 19 SBL LOC1 620 RD	0,359	0,258	0,617	0	III	IP20	1162	17,2
32034 XXX5	D-LINER 19 SBL LOC1 620 DIM5	0,465	0,222	0,687	0,113	I	IP20	1162	17,2
32035 XXX0	D-LINER 19 SBL LOC1 820 RD	0,474	0,342	0,816	0	III	IP20	1575	23
32036 XXX5	D-LINER 19 SBL LOC1 820 DIM5	0,615	0,294	0,909	0,113	I	IP20	1575	23
32037 XXX0	D-LINER 19 SBL LOC1 1020 RD	0,59	0,425	1,015	0	III	IP20	1950	28,8
32038 XXX5	D-LINER 19 SBL LOC1 1020 DIM5	0,765	0,366	1,131	0,113	I	IP20	1950	28,8

32039 XXX0	D-LINER 19 SBL LOC1 1220 RD	0,706	0,508	1,214	0	III	IP20	2340	34,5
32040 XXX5	D-LINER 19 SBL LOC1 1220 DIM5	0,915	0,437	1,352	0,113	I	IP20	2340	34,5
32041 XXX0	D-LINER 19 SBL LOC2 420 RD	0,243	0,175	0,418	0	III	IP20	788	11,5
32042 XXX5	D-LINER 19 SBL LOC2 420 DIM5	0,315	0,151	0,466	0,113	I	IP20	788	11,5
32043 XXX0	D-LINER 19 SBL LOC2 620 RD	0,359	0,258	0,617	0	III	IP20	1162	17,2
32044 XXX5	D-LINER 19 SBL LOC2 620 DIM5	0,465	0,222	0,687	0,113	I	IP20	1162	17,2
32045 XXX0	D-LINER 19 SBL LOC2 820 RD	0,474	0,342	0,816	0	III	IP20	1575	23
32046 XXX5	D-LINER 19 SBL LOC2 820 DIM5	0,615	0,294	0,909	0,113	I	IP20	1575	23
32047 XXX0	D-LINER 19 SBL LOC2 1020 RD	0,59	0,425	1,015	0	III	IP20	1950	28,8
32048 XXX5	D-LINER 19 SBL LOC2 1020 DIM5	0,765	0,366	1,131	0,113	I	IP20	1950	28,8
32049 XXX0	D-LINER 19 SBL LOC2 1220 RD	0,706	0,508	1,214	0	III	IP20	2340	34,5
32050 XXX5	D-LINER 19 SBL LOC2 1220 DIM5	0,915	0,437	1,352	0,113	I	IP20	2340	34,5
32051 XXX0	D-LINER 30 INF LOC1 838 RD	1,038	0,286	1,324	0	III	IP20	1814	15
32052 XXX5	D-LINER 30 INF LOC1 838 DIM5	1,038	0,286	1,324	0,113	I	IP20	1814	15
32053 XXX0	D-LINER 30 INF LOC1 1114 RD	1,338	0,286	1,624	0	III	IP20	2495	19,9
32054 XXX5 (ref)	D-LINER 30 INF LOC1 1114 DIM5	1,384	0,264	1,648	0,113	I	IP20	2495	19,9
32055 XXX0	D-LINER 30 INF LOC1 1390 RD	1,638	0,286	1,924	0	III	IP20	3118	24,8
32056 XXX5	D-LINER 30 INF LOC1 1390 DIM5	1,638	0,286	1,924	0,113	I	IP20	3118	24,8
32064 XXX0	D-LINER 30 SBL LOC1 838 RD	0,705	0,212	0,917	0	III	IP20	1702	23
32065 XXX5	D-LINER 30 SBL LOC1 838 DIM5	0,911	0,285	1,196	0,113	I	IP20	1702	23
32066 XXX0	D-LINER 30 SBL LOC1 1114 RD	0,884	0,371	1,255	0	III	IP20	2127	28,8
32067 XXX5	D-LINER 30 SBL LOC1 1114 DIM5	1,089	0,218	1,307	0,113	I	IP20	2127	28,8
32068 XXX0	D-LINER 30 SBL LOC1 1390 RD	1,058	0,212	1,27	0	III	IP20	2553	34,5
32069 XXX5	D-LINER 30 SBL LOC1 1390 DIM5	1,264	0,253	1,517	0,113	I	IP20	2553	34,5
32070 XXX0	D-LINER 30 SBL LOC2 838 RD	0,715	0,215	0,93	0	III	IP20	1702	23
32071 XXX5	D-LINER 30 SBL LOC2 838 DIM5	0,921	0,275	1,196	0,113	I	IP20	1702	23
32072 XXX0	D-LINER 30 SBL LOC2 1114 RD	0,892	0,363	1,255	0	III	IP20	2127	28,8
32073 XXX5	D-LINER 30 SBL LOC2 1114 DIM5	1,099	0,22	1,319	0,113	I	IP20	2127	28,8
32074 XXX0	D-LINER 30 SBL LOC2 1390 RD	1,068	0,214	1,282	0	III	IP20	2553	34,5
32075 XXX5	D-LINER 30 SBL LOC2 1390 DIM5	1,274	0,255	1,529	0,113	I	IP20	2553	34,5

32076 XXX0	D-LINER 30 SBL LOC3 838 RD	0,727	0,218	0,945	0	III	IP20	1702	23
32077 XXX5	D-LINER 30 SBL LOC3 838 DIM5	0,933	0,739	1,672	0,113	I	IP20	1702	23
32078 XXX0	D-LINER 30 SBL LOC3 1114 RD	0,912	0,848	1,76	0	III	IP20	2127	28,8
32079 XXX5	D-LINER 30 SBL LOC3 1114 DIM5	1,111	0,941	2,052	0,113	I	IP20	2127	28,8
32080 XXX0	D-LINER 30 SBL LOC3 1390 RD	1,08	0,216	1,296	0	III	IP20	2553	34,5
32081 XXX5	D-LINER 30 SBL LOC3 1390 DIM5	1,286	0,257	1,543	0,113	I	IP20	2553	34,5
32082 XXX0	D-LINER 30 INF LOC2 838 RD	1,234	0,37	1,604	0	III	IP20	1871	15
32083 XXX5	D-LINER 30 INF LOC2 838 DIM5	1,234	0,37	1,604	0,113	I	IP20	1871	15
32084 XXX0	D-LINER 30 INF LOC2 1114 RD	1,534	0,37	1,904	0	III	IP20	2495	19,9
32085 XXX5	D-LINER 30 INF LOC2 1114 DIM5	1,534	0,37	1,904	0,113	I	IP20	2495	19,9
32086 XXX0	D-LINER 30 INF LOC2 1390 RD	1,834	0,37	2,204	0	III	IP20	3118	24,8
32087 XXX5	D-LINER 30 INF LOC2 1390 DIM5	1,834	0,37	2,204	0,113	I	IP20	3118	24,8
32088 XXX0	D-LINER 30 INF LOC3 838 RD	1,234	0,37	1,604	0	III	IP20	1871	15
32089 XXX5	D-LINER 30 INF LOC3 838 DIM5	1,234	0,37	1,604	0,113	I	IP20	1871	15
32090 XXX0	D-LINER 30 INF LOC3 1114 RD	1,534	0,37	1,904	0	III	IP20	2495	19,9
32091 XXX5	D-LINER 30 INF LOC3 1114 DIM5	1,534	0,37	1,904	0,113	I	IP20	2495	19,9
32092 XXX0	D-LINER 30 INF LOC3 1390 RD	1,834	0,37	2,204	0	III	IP20	3118	24,8
32093 XXX5	D-LINER 30 INF LOC3 1390 DIM5	1,834	0,37	2,204	0,113	I	IP20	3118	24,8

Applicable extrapolation coefficients for M-DOT.COM mass codes similar to the reference

		A1-A3	A4	A5	B6	C1-C4	D
Mass code	Extrapol. FU	MAXIMUM A1-A3	Distribution stage	Installation stage	Use stage	EOL stage	MAXIMUM D
32011 XXX0	3,244	0,375	0,180	0,375	0,583	0,180	0,375
32012 XXX5	3,244	1,000	0,318	0,458	0,291	0,318	1,000
32013 XXX0	1,859	0,364	0,253	0,364	0,995	0,253	0,364
32014 XXX5	1,859	1,000	0,416	0,598	0,497	0,416	1,000
32015 XXX0	1,239	0,504	0,350	0,504	1,508	0,350	0,504
32016 XXX5	1,239	1,182	0,583	1,182	0,754	0,583	1,182
32017 XXX0	0,930	0,644	0,447	0,644	2,000	0,447	0,644
32018 XXX5	0,930	1,000	0,610	0,879	1,000	0,610	1,000
32019 XXX0	0,744	0,814	0,566	0,814	2,492	0,566	0,814
32020 XXX5	0,744	1,049	0,728	1,049	1,246	0,728	1,049
32021 XXX0	3,244	0,375	0,180	0,375	0,583	0,180	0,375
32022 XXX5	3,244	1,000	0,318	0,458	0,291	0,318	1,000
32023 XXX0	1,859	0,364	0,253	0,364	0,995	0,253	0,364
32024 XXX5	1,859	1,000	0,416	0,598	0,497	0,416	1,000
32025 XXX0	1,239	0,504	0,350	0,504	1,508	0,350	0,504
32026 XXX5	1,239	1,182	0,583	1,182	0,754	0,583	1,182
32027 XXX0	0,930	0,644	0,447	0,644	2,000	0,447	0,644
32028 XXX5	0,930	1,000	0,610	0,879	1,000	0,610	1,000
32029 XXX0	0,744	0,814	0,566	0,814	2,492	0,566	0,814
32030 XXX5	0,744	1,049	0,728	1,049	1,246	0,728	1,049
32031 XXX0	3,166	0,663	0,254	0,663	1,156	0,254	0,663
32032 XXX5	3,166	1,000	0,283	0,572	0,578	0,283	1,000
32033 XXX0	2,147	0,977	0,374	0,977	1,729	0,374	0,977
32034 XXX5	2,147	1,000	0,417	0,841	0,864	0,417	1,000
32035 XXX0	1,584	1,295	0,495	1,295	2,312	0,495	1,295
32036 XXX5	1,584	1,114	0,552	1,114	1,156	0,552	1,114
32037 XXX0	1,279	1,610	0,616	1,610	2,894	0,616	1,610

32038 XXX5	1,279	1,386	0,686	1,386	1,447	0,686	1,386
32039 XXX0	1,066	1,924	0,737	1,924	3,467	0,737	1,924
32040 XXX5	1,066	1,655	0,820	1,655	1,734	0,820	1,655
32041 XXX0	3,166	0,663	0,254	0,663	1,156	0,254	0,663
32042 XXX5	3,166	1,000	0,283	0,572	0,578	0,283	1,000
32043 XXX0	2,147	0,977	0,374	0,977	1,729	0,374	0,977
32044 XXX5	2,147	1,000	0,417	0,841	0,864	0,417	1,000
32045 XXX0	1,584	1,295	0,495	1,295	2,312	0,495	1,295
32046 XXX5	1,584	1,114	0,552	1,114	1,156	0,552	1,114
32047 XXX0	1,279	1,610	0,616	1,610	2,894	0,616	1,610
32048 XXX5	1,279	1,386	0,686	1,386	1,447	0,686	1,386
32049 XXX0	1,066	1,924	0,737	1,924	3,467	0,737	1,924
32050 XXX5	1,066	1,655	0,820	1,655	1,734	0,820	1,655
32051 XXX0	1,375	1,083	0,803	1,083	1,508	0,803	1,083
32052 XXX5	1,375	1,083	0,803	1,083	0,754	0,803	1,083
32053 XXX0	1,000	1,083	0,985	1,083	2,000	0,985	1,083
32054 XXX5 (ref)	1,000	1,000	1,000	1,000	1,000	1,000	1,000
32055 XXX0	0,800	1,184	1,167	1,083	2,492	1,167	1,184
32056 XXX5	0,800	1,184	1,167	1,083	1,246	1,167	1,184
32064 XXX0	1,466	0,803	0,556	0,803	2,312	0,556	0,803
32065 XXX5	1,466	1,080	0,726	1,080	1,156	0,726	1,080
32066 XXX0	1,173	1,405	0,762	1,405	2,894	0,762	1,405
32067 XXX5	1,173	1,000	0,793	0,826	1,447	0,793	1,000
32068 XXX0	0,977	0,803	0,771	0,803	3,467	0,771	0,803
32069 XXX5	0,977	1,000	0,921	0,958	1,734	0,921	1,000
32070 XXX0	1,466	0,814	0,564	0,814	2,312	0,564	0,814
32071 XXX5	1,466	1,042	0,726	1,042	1,156	0,726	1,042
32072 XXX0	1,173	1,375	0,762	1,375	2,894	0,762	1,375
32073 XXX5	1,173	1,000	0,800	0,833	1,447	0,800	1,000
32074 XXX0	0,977	0,811	0,778	0,811	3,467	0,778	0,811
32075 XXX5	0,977	1,000	0,928	0,966	1,734	0,928	1,000

32076 XXX0	1,466	0,826	0,573	0,826	2,312	0,573	0,826
32077 XXX5	1,466	2,799	1,015	2,799	1,156	1,015	2,799
32078 XXX0	1,173	3,212	1,068	3,212	2,894	1,068	3,212
32079 XXX5	1,173	3,564	1,245	3,564	1,447	1,245	3,564
32080 XXX0	0,977	0,818	0,786	0,818	3,467	0,786	0,818
32081 XXX5	0,977	1,000	0,936	0,973	1,734	0,936	1,000
32082 XXX0	1,334	1,402	0,973	1,402	1,508	0,973	1,402
32083 XXX5	1,334	1,402	0,973	1,402	0,754	0,973	1,402
32084 XXX0	1,000	1,402	1,155	1,402	2,000	1,155	1,402
32085 XXX5	1,000	1,402	1,155	1,402	1,000	1,155	1,402
32086 XXX0	0,800	1,402	1,337	1,402	2,492	1,337	1,402
32087 XXX5	0,800	1,402	1,337	1,402	1,246	1,337	1,402
32088 XXX0	1,334	1,402	0,973	1,402	1,508	0,973	1,402
32089 XXX5	1,334	1,402	0,973	1,402	0,754	0,973	1,402
32090 XXX0	1,000	1,402	1,155	1,402	2,000	1,155	1,402
32091 XXX5	1,000	1,402	1,155	1,402	1,000	1,155	1,402
32092 XXX0	0,800	1,402	1,337	1,402	2,492	1,337	1,402
32093 XXX5	0,800	1,402	1,337	1,402	1,246	1,337	1,402