




## INFORM SQ P200-4 DOWN 92767

25515 9220 W-B

AVAILABLE IN  
**BLACK-BLACK** 25515 9220 B-B  
**BLACK-FLEMISH GOLD** 25515 9220 B-FG  
**WHITE-BLACK** 25515 9220 W-B  
**WHITE-WHITE** 25515 9220 W-W

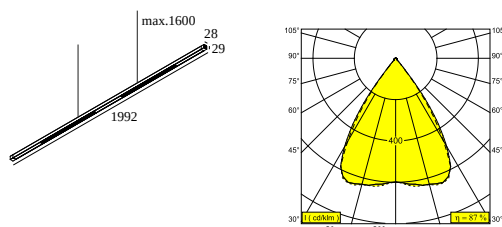

[View on website](#)



### General info

|                           |                                                                                                                                          |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| <b>LOCATION</b>           | indoor                                                                                                                                   |
| <b>INSTALLATION</b>       | Ceiling Suspended                                                                                                                        |
| <b>INGRESS PROTECTION</b> | IP20                                                                                                                                     |
| <b>WEIGHT (KG)</b>        | 1.4                                                                                                                                      |
| <b>ADJUSTABILITY</b>      | non adjustable                                                                                                                           |
| <b>INFORMATION</b>        | 48 x REFLECTOR FL-67°<br>EXCL.LED POWER SUPPLY 400/600mA-DC<br>INCL.2 x CABLE SUSPENSION SINGLE AUTO. 1,6m<br>POWER VIA CABLE SUSPENSION |

### Electrical info

|                     |                           |
|---------------------|---------------------------|
| <b>CLASS</b>        | III                       |
| <b>DIM TYPE</b>     | depending on power supply |
| <b>ENERGY CLASS</b> | E                         |
| <b>CERTIFICATES</b> | CB, ENEC, EPD             |

### Lightsource info

|                                    |                                                                   |
|------------------------------------|-------------------------------------------------------------------|
| <b>LIGHTSOURCE NAME</b>            | LED                                                               |
| <b>LIGHTSOURCE</b>                 | 2 x (LED cluster 7-11,2W / CRI>90 (R9: 50) / 2700K / 1013-1464lm) |
| <b>TM-30 VALUES</b>                | Rf: 93 / Rg: 100                                                  |
| <b>SDCM</b>                        | SDCM3                                                             |
| <b>RISKGROUP</b>                   | RG1                                                               |
| <b>LM80</b>                        | L80 > 60000                                                       |
| <b>BEAMANGLE</b>                   | 67°                                                               |
| <b>LED TECHNICS (LIGHT SOURCE)</b> | 2928lm // 22,4W // 131lm/W                                        |
| <b>LED TECHNICS (LUMINAIRE)</b>    | 2556lm // 25,8W // 99lm/W                                         |

### Requirements

INFORM SQ POWERBOX 50W (DIM5)  
 INFORM POWER SUPPLY 25W + SUSPENSION+CONNECTION ST

For detailed installation instructions, please consult the manual : [25515\\_XXX0\\_HAND.pdf](#)

## INFORM SQ P200-4 DOWN 92767

25515 9220 W-B

### FINISH YOUR SPECIFICATION


#### Power box

#### # of Fixtures



# of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




**25510 0010 B** INFORM SQ POWERBOX 50W B

1

Dimtype: non-dimmable

**25510 0010 W** INFORM SQ POWERBOX 50W W

1



**25510 0015 B** INFORM SQ POWERBOX 50W DIM5 B

1

Dimtype: DALI

**25510 0015 W** INFORM SQ POWERBOX 50W DIM5 W

1


#### LED power supplies

#### # of Fixtures



# of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.


Min current | Max current



**25510 0395** INFORM POWER SUPPLY 25W DIM5

1

Dimtype: DALI



**25510 0440** INFORM POWER SUPPLY 25W

1

Dimtype: non-dimmable

#### Electric connection parts

#### # of Fixtures



# of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current

# DELTALIGHT

## INFORM SQ P200-4 DOWN 92767

25515 9220 W-B



**15225 0350 B** SUSPENSION + CONNECTION ST B

2 needed

☐

**Cutout dimension (mm): 27**

**15225 0350 W** SUSPENSION + CONNECTION ST W

2 needed

☐

Notes: