




D-LINER 30 INF LOC2 1390 93058
DIM5

32087 9325 W-W

AVAILABLE IN
BLACK-BLACK 32087 9325 B-B
WHITE-WHITE 32087 9325 W-W

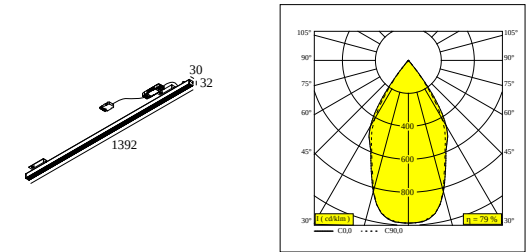

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
INGRESS PROTECTION	IP20
WEIGHT (KG)	0
ADJUSTABILITY	non adjustable
INFORMATION	60 x REFLECTOR FL-58° INCL.DIMMABLE LED POWER SUPPLY 650mA-DC INCL.1 x CABLE 5 x 0,75mm ² - 0,5m + WIELAND PLUG GST18i5 male pastelblue
Electrical info	
ELECTRICAL	220-240V / 0 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	DALI
ENERGY CLASS	C
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED cluster 21,6W / CRI>90 / 3000K / 3822lm
LED TECHNICS (LIGHT SOURCE)	3822lm // 21,6W // 177lm/W
LED TECHNICS (LUMINAIRE)	3023lm // 24,8W // 122lm/W

For detailed installation instructions, please consult the manual : [32087_XXX5_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 Acoustic climate-control ceiling Hunter Douglas 30BD	-

DELTALIGHT

D-LINER 30 INF LOC2 1390 93058 DIM5

32087 9325 W-W

Notes: