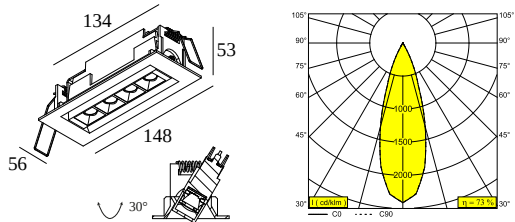




DOT.COM M4 ST OK 93032

424 222 04 932 B-C

AVAILABLE IN
BLACK-BLACK 424 222 04 932 B-B
BLACK-CHROMED 424 222 04 932 B-C
BLACK-FLEMISH GOLD 424 222 04 932 B-FG
WHITE-BLACK 424 222 04 932 W-B
WHITE-CHROMED 424 222 04 932 W-C
WHITE-FLEMISH GOLD 424 222 04 932 W-FG



 [View on website](#)





General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	rectangle - 136 x 40
RECESSED DEPTH (MM)	58
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	30° swiveling
INFORMATION	4 x REFLECTOR FL-32° EXCL.LED POWER SUPPLY 500mA-DC
Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, EAC, ENEC, LCA
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED cluster 5,7W / CRI>90 (R9: 50) / 3000K / 648lm
TM-30 VALUES	Rf: 90 / Rg: 101
SDCM	SDCM3
RISKGROUP	RG2
LM80	L80 > 60000
BEAMANGLE	32°
LED TECHNICS (LIGHT SOURCE)	648lm // 5,7W // 114lm/W
LED TECHNICS (LUMINAIRE)	474lm // 6,6W // 72lm/W
Requirements	
LED POWER SUPPLY 500mA-DC DIM	

For detailed installation instructions, please consult the manual : [424_222_04_XXX_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-
 Stucanet	-
 Wood	-
 Stretched ceiling	-

FINISH YOUR SPECIFICATION



LED power supplies		# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
	300 48 500 ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1 Dimtype: 1-10V Cutout dimension (mm): 30	3
	300 48 500 ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5 Dimtype: DALI Cutout dimension (mm): 45	3
	300 48 500 MDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL Dimtype: non-dimmable Cutout dimension (mm): 30	3
	300 48 500 WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 45	3

	300 90 61 LED POWER SUPPLY MULTI-POWER DIM6 Dimtype: mains (phase cut-off) or push button Cutout dimension (mm): 56	4	☐
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 82	6(6)	☐
	300 90 64 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 72	4(2)	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5 Dimtype: DALI Cutout dimension (mm): 72	4(2)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 84	9(7)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 55	3(2)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 Dimtype: DALI Cutout dimension (mm): 55	3(2)	☐
	300 90 135 LED POWER SUPPLY MULTI-POWER HV Dimtype: non-dimmable Cutout dimension (mm): 90	3->7	☐
	21012 0010 LED POWER SUPPLY MULTI POWER Dimtype: non-dimmable Cutout dimension (mm): 50	3	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	4	☐

DELTALIGHT

DOT.COM M4 ST OK 93032

424 222 04 932 B-C

	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	4	☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 84	6(6)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 54	4	☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	2->2	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	3->4	☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 48	3	☐
	21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5 Dimtype: DALI Cutout dimension (mm): 30	3	☐

Notes: