


TAGLINE







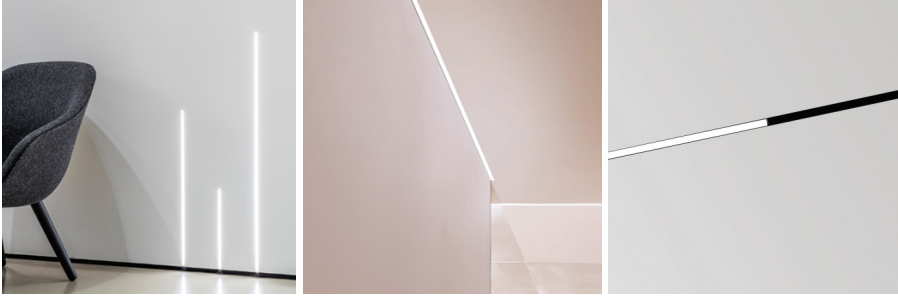













The Tagline made-to-measure profile provides an ultra-minimalistic light line that integrates seamlessly with the architectural lines of your project. Limited to only 1/4" wide the Tagline seems almost invisible, a slender line of light that cuts through space. Excellent to form clean light accents or accentuate the border of a room. When opting for the trimless solution, LED LINE units can be continuous or spaced along the dark shadow channel to create dashes and patterns of light. Also available with a small trim, as surface mounted or as a pendant solution.

Listing

ETL certified to US and Canadian safety standards.

Warranty

5-year limited warranty.

Specification	Tagline PC/ON	Tagline ST	Tagline LED Line	Tagline TR	Tagline TRW
LED Type:	LEDflex Small	LEDflex Small	LEDflex Small	(see LED Line)	(see LED Line)
Installation:	Surface / suspended	Recessed	Into TL & TLW	Trimless recessed	Trimless recessed
Body/Extrusion:	Anodized aluminum	Anodized aluminum	Anodized aluminum	Anodized aluminum	Anodized aluminum
Endcaps:	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Finish:	Black / Gold Colored / White	Black / White	Black	Black	Black
Lens:	Sandblasted polycarbonate	Sandblasted polycarbonate	Sandblasted polycarbonate	(see LED Line)	(see LED Line)
Finish Options:	  	  N/A	  N/A	  	  
Cross Section:	 22mm 7/8" 10mm 3/8"	 19.5mm 3/4" 13mm 1/2"	 19.5mm 3/4" 7mm 1/4"	 9mm 3/8" 23mm 15/16" 73mm 2"-7/8"	 27mm 1"-1/16" 9mm 3/8" 46mm 1"-13/16" 43mm 1"-11/16"

Performance	Static CCT (LEDflex Small)
CCT Options:	2700K, 3000K, 3500K, 4000K
CRI:	90+
*Power:	2.6W/ft
Delivered Lumens (Tagline PC/SF/ST):	140 Lm/ft
Delivered Lumens (Tagline LED Line):	88 Lm/ft
Maximum per 96W Driver:	37' 0"-7/16
LED Cut Length:	1"-3/16
Damp Rated (IP20) Option:	Yes
Wet Rated (IP65) Option:	No
McAdam Step:	2
LED Maintenance:	L70>50,000h
Voltage:	24V
Dimming:	Standard 0-10V dim 120-277V (1%), FE ELV dim 120V (1%)
Power Supply:	96W Constant Voltage driver with 0.9+ power factor and 90+% efficiency

Ordering

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: P-TGLTRD-B-B-RMTXD1-S27SMD-L


Body Type	Installation	Lens	Body Finish	Endcap Finish	Application	Hardware Finish ²	Controls	CCT	Power*	Rating	Layout	Length
P-TGL Tagline Profile	PC Pendant, 5' cable suspended ON Surface mount	S Sandblasted polycarbonate Continuous diffuser entire specified length	B Black	B Black	RMT Remote Power Supply Round coverplate for 4" junction box at power drops	B Black	D1 0-10V dim 120-277V D8 FE ELV dim 120V	27 2700K 30 3000K 35 3500K 40 4000K	SM LEDflex Small	D Damp	S Straight run <118" Mount end-to-end for longer runs	Nominal length in inches
			GC Gold Colored	W White		W White						
						L L-Shape (2-sided)					For all other shapes, continue to configuration grid on next page	
	ST Recessed with microflange	S Sandblasted polycarbonate Continuous diffuser entire specified length	B Black	B Black	RMT Remote Power Supply	X No finished hardware						U U-Shape (3-sided)
												R Rectangle (4-sided)
											C Custom	
TR Recessed black channel with mud into drywall for flat surface	D ¹ Sandblasted polycarbonate Dashes and patterns of light within continuous black channel	B Black	B Black									
TRW Recessed black channel with mud into drywall for corner install	S Sandblasted polycarbonate Continuous diffuser entire specified length											

¹ To specify variable spacing to create dashes and patterns of light within the black channel, specify lengths and spacing in Downlight Pattern grid on next page.

² Applies to coverplate.



* Refer to Power in Performance section on page 1.

Installation PC




Installation ON

POSITION FOR INSTALLATION



Installation ST

POSITION FOR INSTALLATION




Lens D (example)

TGL LEDLINE + LEDFLEX IN SMALL


Installation TR

POSITION FOR INSTALLATION



Installation TRW

POSITION FOR INSTALLATION



DELTALIGHT

www.deltalight.com

P-TAGLINE Ver6 6.24.24

2


Configuration

Example: C-TGLTR-108-C90-56


		-		-		-		-	
Body Type	Installation	Length	Connection	Length	Connection	Length	Connection	Length	
C-TGL¹ Tagline Profile	PC Pendant, 5' cable suspended	Nominal length in inches Straight run <118"	C90 90° joiner bracket	Nominal length in inches Straight run <118"	C90 90° joiner bracket	Nominal length in inches Straight run <118"	C90 90° joiner bracket	Nominal length in inches Straight run <118"	
	ON Surface mount								
	ST Recessed with microflange								
	TR Recessed black channel with mud into drywall for flat surface								
	TRW Recessed black channel with mud into drywall for corner install	Nominal length in inches Straight run <118"	C90I 90° joiner bracket with internal illumination C90E 90° joiner bracket with external illumination	Nominal length in inches Straight run <118"	C90I 90° joiner bracket with internal illumination C90E 90° joiner bracket with external illumination	Nominal length in inches Straight run <118"	C90I 90° joiner bracket with internal illumination C90E 90° joiner bracket with external illumination	Nominal length in inches Straight run <118"	

¹ Mount end-to-end for longer runs.
Continue for all sections / connections for each run.

TAGLINE PC/ON/ST/TR

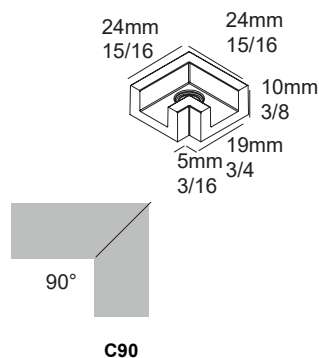

TAGLINE TRW

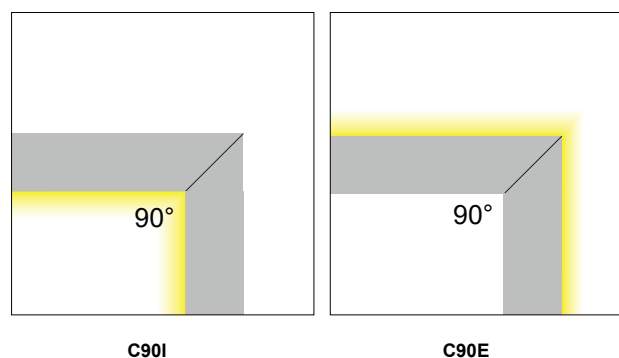

Configuration - DOWNLIGHT PATTERN

OPTIONAL - ONLY FOR LENS D


Example: L-TGLTRD-X6-42-X12-42-X6 / L-TGLTRD-X7-42-X7

		-		-		-		-	
Body Type	Installation	Lens	Space	Luminaire Length	Space	Luminaire Length	Space	Luminaire Length	Space
L-TGL Tagline Profile	TR Recessed black channel with mud into drywall for flat surface	D Sandblasted polycarbonate Dashes and patterns of light within continuous black channel	X _____ Nominal length in inches	_____ Nominal length in inches Straight run <118"	X _____ Nominal length in inches	_____ Nominal length in inches Straight run <118"	X _____ Nominal length in inches	_____ Nominal length in inches Straight run <118"	X _____ Nominal length in inches
	TRW Recessed black channel with mud into drywall for corner install								


Continue for all sections / connections for each run.

Photometric Data

FULL POWER STATIC CCT



Tagline PC/ON/ST




Tagline LEDline
for TR/TRW

Application Options

REMOTE POWER SUPPLY

A: 12" x **B:** 2"-7/8 x **C:** 4"-1/4
A: 305mm x **B:** 72mm x **C:** 108mm



- For Remote application
- ETL Listed
- Damp rated

Driver Options

D1			Dimmer Compatibility <ul style="list-style-type: none">• Leviton IP710-DLZ• Lutron DVTV-XX
• Dimming Control	0-10V		
• Dimming Range	1-100%		
• Dim to off	yes		
• Power Factor @ Full Load	>0.9		
• Efficiency @ Full Load	≥90		
• THD @ Full Load	<20%		
D8			
• Dimming Control	Phase Control		
• Dimming Range	1-100%		
• Dim to off	yes		
• Power Factor @ Full Load	>0.95		
• Efficiency @ Full Load	≥90		
• THD @ Full Load	<10%		

As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.