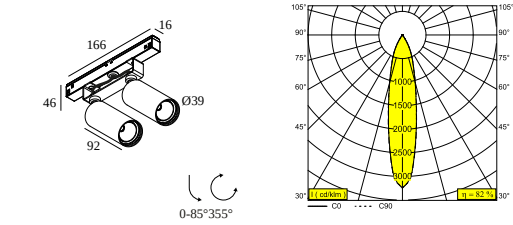




M20/M26H - SPY 392 93020 MDL

23317 9320 W

AVAILABLE IN
BLACK 23317 9320 B
WHITE 23317 9320 W



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	0° to 85° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-20° EXCL.LED POWER SUPPLY 48V-DC
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	MDL = 1-10V or DALI or push button
ENERGY CLASS	D
CERTIFICATES	CB, ENEC, EPD
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	2 x (LED array 8,6W / CRI>90 (R9: 52) / 3000K / 1089lm)
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	2178lm // 17,2W // 127lm/W
LED TECHNICS (LUMINAIRE)	1776lm // 19,8W // 90lm/W

Remarks

Take a look at our [MAGNETIC PROFILES](#) movie

Requirements

SPY 39 TUBE or VISOR 39
LED POWER SUPPLY 48V-DC

Options

DIMMABLE MODULATOR

For detailed installation instructions, please consult the manual : [23317_XXX0_HAND.pdf](#)


FINISH YOUR SPECIFICATION

Current supply

of Fixtures

i # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



21032 0030 SMART 48 MODULATOR PLUG-IN WD

9


Dimtype: WDL = wireless dimmable

SMART 48

of Fixtures

i # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.


Min current | Max current



300 90 011 SMART 48 MODULATOR DIM9

9

Dimtype: 1-10V or DALI or push button



300 90 012 SMART 48 MODULATOR WD

9


Dimtype: WDL = wireless dimmable

LED power supplies

of Fixtures

i # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN




5

Dimtype: non-dimmable


DELTALIGHT

M20/M26H - SPY 392 93020 MDL


23317 9320 W

	300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN	12	☐
Dimtype: non-dimmable			
	21012 0230 LED POWER SUPPLY 48V-DC / 100W	5	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 40			
	21012 0240 LED POWER SUPPLY 48V-DC / 200W	10	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 40			

Light altering devices

	24144 0030 B VISOR 39 B	☐
---	--------------------------------	--------------------------

Finish your product







	24144 0010 B SPY 39 TUBE B	☐
	24144 0010 FBR SPY 39 TUBE FBR	☐
	24144 0010 FC SPY 39 TUBE FC	☐
	24144 0010 GC SPY 39 TUBE GC	☐
	24144 0010 W SPY 39 TUBE W	☐
	24144 0070 SPY 39 TUBE SBL	☐

DELTALIGHT

M20/M26H - SPY 392 93020 MDL

23317 9320 W





COMPATIBLE COMPOSABLES

SHIFTLINE M26H FLOOR		Available Colours
	29323 920W SLM26H F MDL WD	
	29323 930W SLM26H F MDL WD	
SHIFTLINE M26H profile		Available Colours
	23359 0000 SLM26H - PROFILE	 
	23359 0010 SLM26H - PROFILE 1m	 
	23359 0020 SLM26H - PROFILE 2m	         
	23359 0030 SLM26H - PROFILE 3m	         
SPLITLINE M20 ST profile		Available Colours
	23397 0000 SPM20 ST - PROFILE	 
	23397 0020 SPM20 ST - PROFILE 2m	 
	23397 0030 SPM20 ST - PROFILE 3m	 

DELTALIGHT

M20/M26H - SPY 392 93020 MDL

23317 9320 W

SPLITLINE M20 profile		Available Colours
	420 20 10 00 SPM20 - PROFILE 1m	
	420 20 20 00 SPM20 - PROFILE 2m	
	420 20 30 00 SPM20 - PROFILE 3m	
	23301 0000 SPM20 - PROFILE B	

Notes: