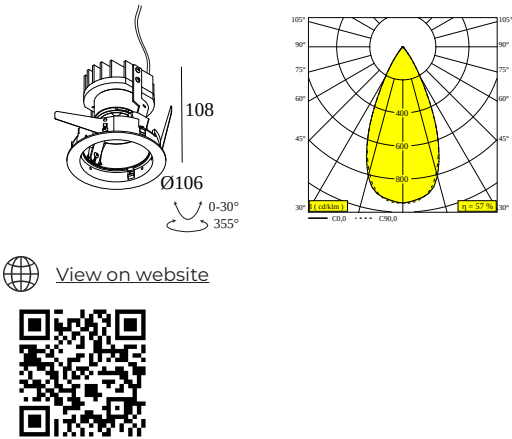




iMAX II ROUND ADJUSTABLE
SOFT 93045

24227 9030 B

AVAILABLE IN
BLACK 24227 9030 B
WHITE 24227 9030 W



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - 98
RECESSED DEPTH (MM)	125
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20 or IP54 (with TUBE IP)
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	REFLECTOR WFL-45° EXCL.DIMMABLE LED POWER SUPPLY 350mA-DC

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	F

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 11,8W / CRI>90 (R9: 50) / 3000K-1800K / 1307lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	45°
LED TECHNICS (LIGHT SOURCE)	1307lm // 11,8W // 110lm/W
LED TECHNICS (LUMINAIRE)	744lm // 13,6W // 55lm/W

Requirements	
LED POWER SUPPLY 350mA-DC DIM	
iMAX II TUBE ROUND	

For detailed installation instructions, please consult the manual : [24227_XXX0_HAND.pdf](#)

DELTALIGHT

iMAX II ROUND ADJUSTABLE SOFT 93045


24227 9030 B

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
 System ceiling	 15215 0010 - MOUNTING KIT FLUSH iMAX II ROUND	Required
 Plasterboard	 15215 0010 - MOUNTING KIT FLUSH iMAX II ROUND	Required
 Stucanet	 15215 0010 - MOUNTING KIT FLUSH iMAX II ROUND	Required
 Wood	-	
 Stretched ceiling	-	

FINISH YOUR SPECIFICATION

Emergency units

	21032 0270 B EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER B	☐
	21032 0270 W EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER W	☐



LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.











Min current | Max current

	300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1	1 ☐
	Dimtype: 1-10V	
	Cutout dimension (mm): 30	
	300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	1 ☐
	Dimtype: DALI	
	Cutout dimension (mm): 45	

DELTALIGHT

iMAX II ROUND ADJUSTABLE SOFT 93045








24227 9030 B

	300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL Dimtype: non-dimmable Cutout dimension (mm): 30	1	☐
	300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 45	1	☐
	300 90 61 LED POWER SUPPLY MULTI-POWER DIM6 Dimtype: mains (phase cut-off) or push button Cutout dimension (mm): 56	1	☐
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 82	2(2)	☐
	300 90 64 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 72	1(1)	☐
	300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9 Dimtype: 1-10V or DALI or push button	1	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5 Dimtype: DALI Cutout dimension (mm): 72	1(1)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 84	3(3)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 55	1(1)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 Dimtype: DALI Cutout dimension (mm): 55	1(1)	☐

DELTA LIGHT

iMAX II ROUND ADJUSTABLE SOFT 93045

24227 9030 B

	21012 0021 LED POWER SUPPLY MULTI POWER DIM1	1	☐
Dimtype: 1-10V			
Cutout dimension (mm): 54			
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5	1	☐
Dimtype: DALI			
Cutout dimension (mm): 54			
	21012 004W LED POWER SUPPLY MULTI-POWER WDL	2(2)	☐
Dimtype: WDL = wireless dimmable			
Cutout dimension (mm): 84			
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	1	☐
Dimtype: WDL = wireless dimmable			
Cutout dimension (mm): 54			
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8	1	☐
Dimtype: mains (phase cut-off)			
Cutout dimension (mm): 50			
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	1	☐
Dimtype: mains (phase cut-off)			
Cutout dimension (mm): 48			
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	1	☐
Dimtype: DALI			
Cutout dimension (mm): 30			

Mounting kits



	15215 0010 MOUNTING KIT FLUSH iMAX II ROUND		☐
Cutout dimension (mm): 121			

DELTALIGHT

iMAX II ROUND ADJUSTABLE SOFT 93045

24227 9030 B

Finish your product

	<u>24213 0010 B</u>	iMAX II TUBE ROUND B	☐
	<u>24213 0010 FG</u>	iMAX II TUBE ROUND FG	☐
	<u>24213 0010 MMAT</u>	iMAX II TUBE ROUND MMAT	☐
	<u>24213 0010 W</u>	iMAX II TUBE ROUND W	☐
	<u>24213 0040 B</u>	iMAX II TUBE ROUND IP B	☐
	<u>24213 0040 FG</u>	iMAX II TUBE ROUND IP FG	☐
	<u>24213 0040 MMAT</u>	iMAX II TUBE ROUND IP MMAT	☐
	<u>24213 0040 W</u>	iMAX II TUBE ROUND IP W	☐

Notes: