




M20/M26H - SPY 391 SOFT 93020
DIM5

23424 9025 BRCU

- AVAILABLE IN
- BLACK 23424 9025 B
 - BRUSHED ALU 23424 9025 BRA
 - BRUSHED ANTHRACITE 23424 9025 BRAT
 - BRUSHED COPPER 23424 9025 BRCU
 - BRUSHED GOLD 23424 9025 BRG
 - BRUSHED OLD BRONZE 23424 9025 BROB
 - FLEMISH BRONZE 23424 9025 FBR
 - FLEMISH GOLD 23424 9025 FG
 - GOLD COLOURED 23424 9025 GC
 - PIANO BLACK 23424 9025 PB
 - WHITE 23424 9025 W

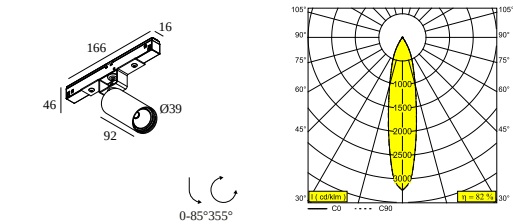

[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	0° to 85° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-20° EXCL.LED POWER SUPPLY 48V-DC

Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	F
CERTIFICATES	EPD

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 6W / CRI>90 (R9: 50) / 3000K-1800K / 623lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	623lm // 6W // 105lm/W
LED TECHNICS (LUMINAIRE)	508lm // 6,9W // 74lm/W

Requirements	
SPY 39 TUBE	
LED POWER SUPPLY 48V-DC	

DELTALIGHT

M20/M26H - SPY 391 SOFT 93020 DIM5

23424 9025 BRCU

For detailed installation instructions, please consult the manual : [23424_XXX5_HAND.pdf](#)

FINISH YOUR SPECIFICATION


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.


Min current | Max current



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

8


Dimtype: non-dimmable



300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN

20

Dimtype: non-dimmable




21012 0230 LED POWER SUPPLY 48V-DC / 100W

8

Dimtype: non-dimmable

Cutout dimension (mm): 40




21012 0240 LED POWER SUPPLY 48V-DC / 200W

17

Dimtype: non-dimmable

Cutout dimension (mm): 40

Finish your product



24144 0010 B SPY 39 TUBE B

24144 0010 FBR SPY 39 TUBE FBR

24144 0010 FG SPY 39 TUBE FG

24144 0010 GC SPY 39 TUBE GC

DELTALIGHT


M20/M26H - SPY 391 SOFT 93020 DIM5

23424 9025 BRCU

	24144 0010 W SPY 39 TUBE W	☐
	24144 0070 SPY 39 TUBE SBL	☐

COMPATIBLE COMPOSABLES




SHIFTLINE M26H + SBL		Available Colours
	30411 9205 SHIFTLINE M26H + SBL 2m DIM5	☐ ☐
	30411 9305 SHIFTLINE M26H + SBL 2m DIM5	☐ ☐
	30412 9205 SHIFTLINE M26H + SBL 3m DIM5	☐ ☐
	30412 9305 SHIFTLINE M26H + SBL 3m DIM5	☐ ☐
	30413 9205 SHIFTLINE M26H + SBL 4m DIM5	☐ ☐
	30413 9305 SHIFTLINE M26H + SBL 4m DIM5	☐ ☐

SHIFTLINE M26H profile		Available Colours
	23359 0000 SLM26H - PROFILE	☐ ☐

DELTALIGHT

M20/M26H - SPY 391 SOFT 93020 DIM5

23424 9025 BRCU

	23359 0010 SLM26H - PROFILE 1m	
	23359 0020 SLM26H - PROFILE 2m	
	23359 0030 SLM26H - PROFILE 3m	




SPLITLINE M20 ST profile

Available Colours

	23397 0000 SPM20 ST - PROFILE	
	23397 0020 SPM20 ST - PROFILE 2m	
	23397 0030 SPM20 ST - PROFILE 3m	

SPLITLINE M20 profile


Available Colours

	420 20 10 00 SPM20 - PROFILE 1m	
	420 20 20 00 SPM20 - PROFILE 2m	
	420 20 30 00 SPM20 - PROFILE 3m	

DELTALIGHT

M20/M26H - SPY 391 SOFT 93020 DIM5

23424 9025 BRCU



23301 0000 SPM20 - PROFILE B

Notes: