



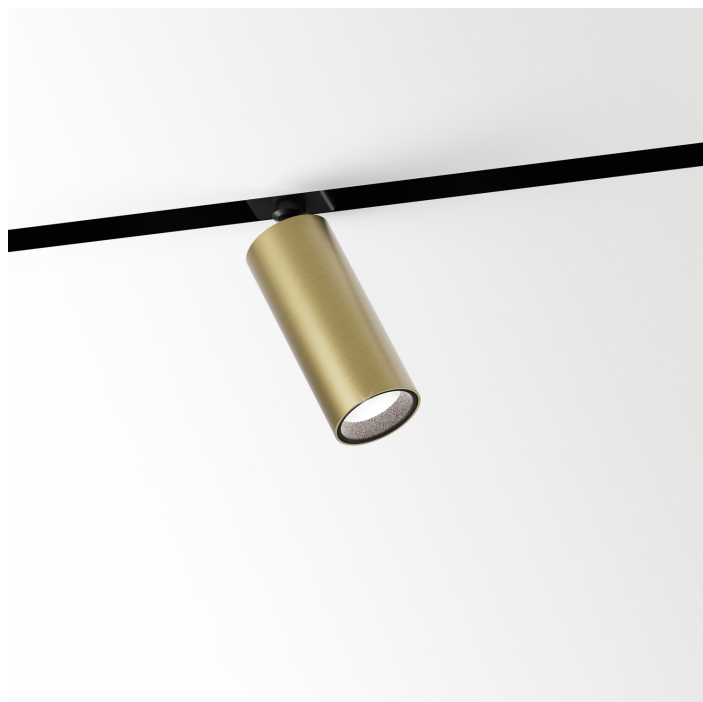


M20/M26H - SPY 391 SOFT 93020 DIM5

23424 9025 BRG

AVAILABLE IN

BLACK 23424 9025 B
BRUSHED ALU 23424 9025 BRA
BRUSHED ANTHRACITE 23424 9025 BRAT
BRUSHED COPPER 23424 9025 BRCU
BRUSHED GOLD 23424 9025 BRG
BRUSHED OLD BRONZE 23424 9025 BROB
FLEMISH BRONZE 23424 9025 FBR
FLEMISH GOLD 23424 9025 FG
GOLD COLOURED 23424 9025 GC
PIANO BLACK 23424 9025 PB
WHITE 23424 9025 W



[View on website](#)



General info

LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	0° to 85° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-20° EXCL.LED POWER SUPPLY 48V-DC

Electrical info

ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	F
CERTIFICATES	EPD

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 6W / CRI>90 (R9: 50) / 3000K-1800K / 623lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	623lm // 6W // 105lm/W
LED TECHNICS (LUMINAIRE)	508lm // 6,9W // 74lm/W

Requirements

SPY 39 TUBE
LED POWER SUPPLY 48V-DC

DELTALIGHT

M20/M26H - SPY 391 SOFT 93020 DIM5

23424 9025 BRG

For detailed installation instructions, please consult the manual : [23424_XXX5_HAND.pdf](#)

FINISH YOUR SPECIFICATION

LED power supplies

of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

8


Dimtype: non-dimmable



300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN

20

Dimtype: non-dimmable



21012 0230 LED POWER SUPPLY 48V-DC / 100W

8

Dimtype: non-dimmable

Cutout dimension (mm): 40



21012 0240 LED POWER SUPPLY 48V-DC / 200W

17

Dimtype: non-dimmable

Cutout dimension (mm): 40

Finish your product



24144 0010 B SPY 39 TUBE B

24144 0010 FBR SPY 39 TUBE FBR

24144 0010 FG SPY 39 TUBE FG

24144 0010 GC SPY 39 TUBE GC

DELTALIGHT

M20/M26H - SPY 391 SOFT 93020 DIM5

23424 9025 BRG


		24144 0010 W SPY 39 TUBE W	☐
		24144 0070 SPY 39 TUBE SBL	☐

COMPATIBLE COMPOSABLES

SHIFTLINE M26H + SBL	Available Colours
----------------------	-------------------

		30411 9205 SHIFTLINE M26H + SBL 2m DIM5	☐ ☐
		30411 9305 SHIFTLINE M26H + SBL 2m DIM5	☐ ☐
		30412 9205 SHIFTLINE M26H + SBL 3m DIM5	☐ ☐
		30412 9305 SHIFTLINE M26H + SBL 3m DIM5	☐ ☐
		30413 9205 SHIFTLINE M26H + SBL 4m DIM5	☐ ☐
		30413 9305 SHIFTLINE M26H + SBL 4m DIM5	☐ ☐


SHIFTLINE M26H profile	Available Colours
------------------------	-------------------

		23359 0000 SLM26H - PROFILE	☐ ☐
---	--	------------------------------------	---

DELTALIGHT

M20/M26H - SPY 391 SOFT 93020 DIM5

23424 9025 BRG

	23359 0010 SLM26H - PROFILE 1m	
	23359 0020 SLM26H - PROFILE 2m	
	23359 0030 SLM26H - PROFILE 3m	




SPLITLINE M20 ST profile

Available Colours

	23397 0000 SPM20 ST - PROFILE	
	23397 0020 SPM20 ST - PROFILE 2m	
	23397 0030 SPM20 ST - PROFILE 3m	

SPLITLINE M20 profile


Available Colours

	420 20 10 00 SPM20 - PROFILE 1m	
	420 20 20 00 SPM20 - PROFILE 2m	
	420 20 30 00 SPM20 - PROFILE 3m	

DELTALIGHT

M20/M26H - SPY 391 SOFT 93020 DIM5

23424 9025 BRG



23301 0000 SPM20 - PROFILE B

Notes: