



COMPO M TW 94020

9 15730 9020 B


AVAILABLE IN

NOIR 9 15730 9020 B

CHROME 9 15730 9020 C

CHROME FONCÉ 9 15730 9020 DC

BLANC 9 15730 9020 W

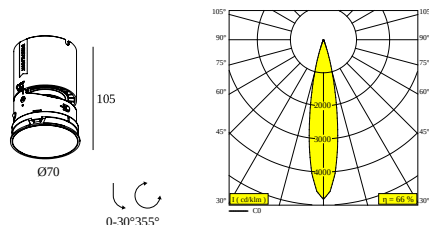

 [View on website](#)



General info

LOCATION	interieur
INSTALLATION	Plafond Encastré
CUTOUT SHAPE/SIZE (MM)	circulaire - 110
RECESSED DEPTH (MM)	105
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.266
ADJUSTABILITY	0° à 30° inclinable, 355° rotatif

Electrical info

CLASS	III
DIM TYPE	selon le type d'alimentation externe
ENERGY CLASS	G

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 11,8W / CRI>90 (R9: 50) / 1800K-4000K / 1199lm
RVALUES	rf: 89 / Rg: 100
SDMC	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	1199lm // 11,8W // 102lm/W
LED TECHNICS (LUMINAIRE)	789lm // 13,6W // 58lm/W

Requirements

LED POWER SUPPLY 500 mA - DC

Accessories

COMPO M HONEYCOMB SINGLE USE B
COMPO M LINEAR SPREAD LENS
COMPO M SPREAD LENS
COMPO M SOFTENING LENS
COMPO M GLASS SBL

For detailed installation instructions, please consult the manual : [9_15730_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
	 15710 0020 - MOUNTING KIT COMPO M TRIM	Required
	 15710 0050 - MOUNTING KIT COMPO M TRIMLESS	Required
	 15710 0020 - MOUNTING KIT COMPO M TRIM	Required
	 15710 0050 - MOUNTING KIT COMPO M TRIMLESS	Required
	 15710 0020 - MOUNTING KIT COMPO M TRIM	Required
	 15710 0050 - MOUNTING KIT COMPO M TRIMLESS	Required

FINISH YOUR SPECIFICATION

alimentation led	# of Fixtures
 web2print_power_supply_info_box	Min current Max current
15710 5900 LED POWER SUPPLY MULTIPOWER 12W DALI DT8 500mA	1

kit de montage	
 15710 0020 B MOUNTING KIT COMPO M TRIM B Cutout dimension (mm): 76	☐
15710 0020 W MOUNTING KIT COMPO M TRIM W	☐
 15710 0050 MOUNTING KIT COMPO M TRIMLESS Cutout dimension (mm): 76	☐

modifier les dispositifs de lumière	
15710 1100 B COMPO M HONEYCOMB SINGLE USE B	☐
15710 1110 COMPO M LINEAR SPREAD LENS Cutout dimension (mm): 32,5	☐

DELTALIGHT

COMPO M TW 94020

9 15730 9020 B

<u>15710 1120</u>	COMPO M SPREAD LENS	☐
-------------------	---------------------	--------------------------

Cutout dimension (mm): 32,5

<u>15710 1130</u>	COMPO M SOFTENING LENS	☐
-------------------	------------------------	--------------------------

Cutout dimension (mm): 32,5

<u>15710 1140</u>	COMPO M GLASS SBL	☐
-------------------	-------------------	--------------------------

Cutout dimension (mm): 32,5

Notes: