




SPY 52 CLIP HE 94020

19802 9420 B-B

AVAILABLE IN
BLACK-BLACK 19802 9420 B-B
FLEMISH BRONZE-BLACK 19802 9420 FBR-B
FLEMISH GOLD-BLACK 19802 9420 FG-B
FULL WHITE 19802 9420 FW
GOLD COLORED-BLACK 19802 9420 GC-B
WHITE-WHITE 19802 9420 W-W

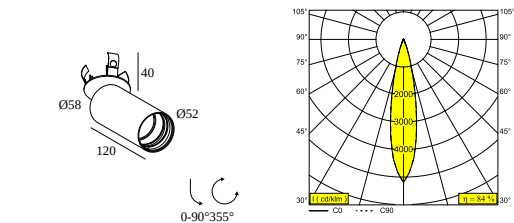

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Semi-recessed
CUTOUT SHAPE/SIZE (MM)	round - 51
RECESSED DEPTH (MM)	40
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	LENS FL-20° EXCLLED POWER SUPPLY 350mA-DC

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	D
CERTIFICATES	LCA

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 6W / CRI>90 (R9: 60) / 4000K / 975lm
TM-30 VALUES	rf: 96 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	975lm // 6W // 163lm/W
LED TECHNICS (LUMINAIRE)	790lm // 6,9W // 114lm/W

Remarks
High Efficacy : > 100lm/W

Requirements
SPY 52 TUBE
LED POWER SUPPLY 350mA-DC DIM

Options
MOUNTING KIT FLUSH SPY


SPY 52 CLIP HE 94020

19802 9420 B-B

For detailed installation instructions, please consult the manual : [19802_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Emergency units



21032 0270 B EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER B

☐

Cutout dimension (mm): 27

21032 0270 W EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER W

☐


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 90 91 LED POWER SUPPLY 350mA-DC / 15W

2(1)

☐

Dimtype: non-dimmable

Cutout dimension (mm): 40




300 90 110 LED POWER SUPPLY 350mA-DC / 10W DIM8

1

☐

Dimtype: mains (phase cut-off)

Cutout dimension (mm): 42




300 90 116 LED POWER SUPPLY 350mA-DC / 18W DIM8

2->2

☐

Dimtype: mains (phase cut-off)

Cutout dimension (mm): 55



21012 0515 LED POWER SUPPLY MULTI POWER DIM5

1(1)

☐

Dimtype: DALI

Cutout dimension (mm): 55



21012 0520 LED POWER SUPPLY 350mA-DC / 8W

1(0)

☐


Dimtype: non-dimmable

Cutout dimension (mm): 47

DELTALIGHT

SPY 52 CLIP HE 94020

19802 9420 B-B




21012 0575 LED POWER SUPPLY MULTI POWER DIM5

Dimtype: DALI

Cutout dimension (mm): 55

2->3(2) ☐

Mounting kits




414 90 01 MOUNTING KIT FLUSH SPY

Cutout dimension (mm): 83

☐

Finish your product



19810 0100 B SPY 52 TUBE B

☐

19810 0100 FBR SPY 52 TUBE FBR

☐

19810 0100 FG SPY 52 TUBE FG

☐

19810 0100 GC SPY 52 TUBE GC

☐

19810 0100 W SPY 52 TUBE W

☐

Notes: