




SOLI - 52 SOFT 93030 Q-DIM

27186 904Q W

AVAILABLE IN  
**BLACK** 27186 904Q B  
**GOLD COLOURED** 27186 904Q GC  
**WHITE** 27186 904Q W

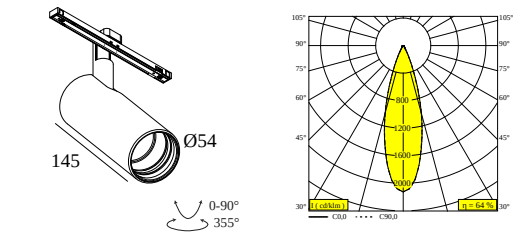

 [View on website](#)



| General info       |                                                                                             |
|--------------------|---------------------------------------------------------------------------------------------|
| LOCATION           | indoor                                                                                      |
| INSTALLATION       | Low voltage systems Low voltage system mounted                                              |
| INGRESS PROTECTION | IP20                                                                                        |
| WEIGHT (KG)        | 0.4                                                                                         |
| ADJUSTABILITY      | 0° to 90° swiveling, 360° rotatable                                                         |
| INFORMATION        | REFLECTOR FL-30°<br>EXCL.LED POWER SUPPLY 48V-DC<br>Optional REFLECTORS 20° & 45° available |

| Electrical info |               |
|-----------------|---------------|
| ELECTRICAL      | 48V-DC        |
| CLASS           | III           |
| DIM TYPE        | Qbus dim      |
| ENERGY CLASS    | E             |
| CERTIFICATES    | CB, ENEC, LCA |

| Lightsource info            |                                                          |
|-----------------------------|----------------------------------------------------------|
| LIGHTSOURCE NAME            | LED                                                      |
| LIGHTSOURCE                 | LED array 10,2W / CRI>90 (R9: 50) / 3000K-1800K / 1038lm |
| SDCM                        | SDCM2                                                    |
| RISKGROUP                   | RG1                                                      |
| LM80                        | L90B10 > 50000                                           |
| BEAMANGLE                   | 30°                                                      |
| LED TECHNICS (LIGHT SOURCE) | 1038lm // 10,2W // 109lm/W                               |
| LED TECHNICS (LUMINAIRE)    | 662lm // 11,7W // 56lm/W                                 |

| Requirements            |  |
|-------------------------|--|
| SPY 52 TUBE             |  |
| LED POWER SUPPLY 48V-DC |  |

| Accessories           |  |
|-----------------------|--|
| HONEYCOMB 42          |  |
| SPREAD LENS 42        |  |
| LINEAR SPREAD LENS 42 |  |
| SOFTENING LENS 42     |  |
| GLASS SBL 42          |  |

# DELTALIGHT

## SOLI - 52 SOFT 93030 Q-DIM

27186 904Q W

For detailed installation instructions, please consult the manual : [27186\\_XXXQ\\_HAND.pdf](#)

### FINISH YOUR SPECIFICATION

#### Light altering devices



**19810 0010 B** HONEYCOMB 42 SINGLE USE B

☐

**19810 0020** LINEAR SPREAD LENS 42

☐

**19810 0030** SPREAD LENS 42

☐

**19810 0040** SOFTENING LENS 42

☐

**19810 0050** GLASS SBL 42

☐

**19810 0060 B** HONEYCOMB 42 DOUBLE USE B

☐

#### Finish your product



**19810 0100 B** SPY 52 TUBE B

☐

# DELTALIGHT

## SOLI - 52 SOFT 93030 Q-DIM


27186 904Q W

|                       |                 |                          |
|-----------------------|-----------------|--------------------------|
| <b>19810 0100 FBR</b> | SPY 52 TUBE FBR | <input type="checkbox"/> |
| <b>19810 0100 FG</b>  | SPY 52 TUBE FG  | <input type="checkbox"/> |
| <b>19810 0100 GC</b>  | SPY 52 TUBE GC  | <input type="checkbox"/> |
| <b>19810 0100 W</b>   | SPY 52 TUBE W   | <input type="checkbox"/> |

### Replaceable reflector / lens

|                                                                                    |                   |                      |                          |
|------------------------------------------------------------------------------------|-------------------|----------------------|--------------------------|
|    | <b>19810 0180</b> | SPY 52 REFLECTOR 20° | <input type="checkbox"/> |
|  | <b>19810 0190</b> | SPY 52 REFLECTOR 45° | <input type="checkbox"/> |
|  | <b>19810 0240</b> | SPY 52 REFLECTOR 30° | <input type="checkbox"/> |

## COMPATIBLE COMPOSABLES

| SOLISCAPE profile                                                                                                         | Available Colours                                                                                                                                                           |
|---------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>27111 0020</b> SOLI - PROFILE 2m |   |
| <br><b>27111 0030</b> SOLI - PROFILE 3m |   |

Notes:

# DELTALIGHT

**SOLI - 52 SOFT 93030 Q-DIM**

27186 904Q W