




FRAX MB POLE 93047
HONEYCOMB DIM5

26021 9335 N

AVAILABLE IN
ANTHRACITE 26021 9335 N

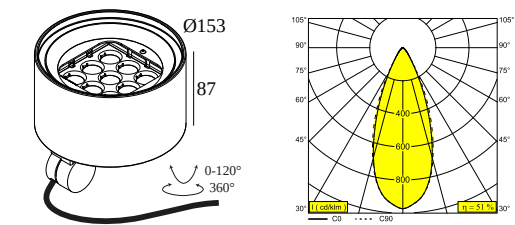

 [View on website](#)



General info	
LOCATION	outdoor
INSTALLATION	Pole Pole top
INGRESS PROTECTION	IP65
PROTECTION AGAINST MECHANICAL IMPACT	IK08
WEIGHT (KG)	2.3
ADJUSTABILITY	0° to 120° swiveling, 360° rotatable
INFORMATION	9 x LENS SP-14° INCL.DIMMABLE LED POWER SUPPLY 900mA-DC INCL.BEAM LENS 47° INCL.HONEYCOMB INCL.1 x CABLE H05 RN-F 5 x 1mm² 6m

Electrical info	
ELECTRICAL	110-277V / 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	DALI
ENERGY CLASS	F
CERTIFICATES	EPD, RCM

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED cluster 23,4W / CRI>90 (R9: 60) / 3000K / 2654lm
TM-30 VALUES	Rf: 92 / Rg: 99
SDCM	SDCM3
RISKGROUP	RG2
LM80	L80 > 150000
BEAMANGLE	47°
LED TECHNICS (LIGHT SOURCE)	2654lm // 23,4W // 113lm/W
LED TECHNICS (LUMINAIRE)	1354lm // 26,9W // 50lm/W

Requirements
FRAX BRACKET

Options
FRAX ANTI VANDAL SCREWS

Accessories
FRAX M KAP

DELTA LIGHT


FRAX MB POLE 93047 HONEYCOMB DIM5

26021 9335 N

For detailed installation instructions, please consult the manual : [26021_XXX5_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Light altering devices




120
35

26070 0020 N

FRAX M KAP N

☐


Other



26070 0030

FRAX ANTI VANDAL SCREWS 5 PCS

☐




0160
0151

26071 0050 N

FRAX POLE 60 BRACKET N

☐



0160
0117

26071 0060 N

FRAX POLE 80 BRACKET N

☐

Notes: