




# SKIX P

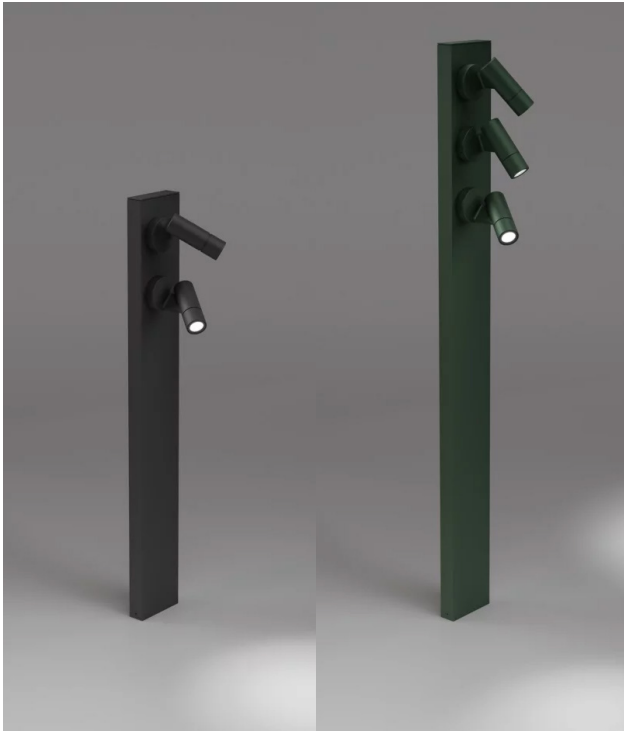

As a projector for exterior use, Skix has many appearances. Skix can be used throughout a complete outdoor project, to light up trees, emphasize architecture or highlight pathways.

Specification	
Adjustability:	0-90° / 360°
Rating:	IP65

Performance	
LED Maintenance:	L90<150,000
McAdam Step:	3
CRI:	90
*SP:	5W or 7W

Delivered Lumens:	2700K	3000K
Skix P07:	346Lm	377K
Skix P10:	519Lm	566Lm

**Listing**  
ETL certified to US and Canadian safety standards.

**Warranty**  
5-year limited warranty.

## Ordering

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: SKX10-3SS27AX-PGR-PMRMTD8-120

--	--	--	--	--	--	--	--	--	--

Luminaire	Height	Power*	Optic	CCT	Function	Finish	Installation	Application	Controls***
SKX Skix (Bollard)	07 755mm 19"- 23/32	2 2 Skix Modules Total 5W	SS Super Spot 10°	27 2700K	AX Adjustable, Exterior use	N Anthracite	DM Direct Mount	RMT Remote Power Supply	D1-UNV 0-10V dim 120-277V
	10 1005mm 39"- 3/16	3 3 Skix Modules Total 7W		30 3000K					
						PGR Pine Green	PL Plate Mount		

\*\*\* Contact factory for additional dimming options


## Related Products

Bazil, Montur, Walker II, Skix




**Finish Options**



**SKIX 07**



**SKIX 10**




**Accessories**



**Photometric Data**

**SKIX**






## Installation Options

### PM - PIN 11

### PL - PLATE 12

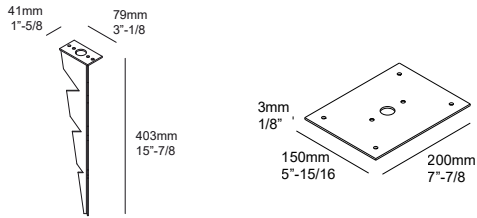

## Driver Options

### D1

- Dimming Control 1-10V
- Dimming Range 0-100%
- Dim to off NO
- Power Factor @ Full Load >0.90
- Efficiency @ Full Load ≥88
- THD @ Full Load <20% under 120Vac input with 60~100% load condition (for all output currents)

#### Dimmer Compatibility

- Leviton IP710-LFZ / IP710-DLX
- Lutron DDTV/DVSTV/DVSCSTV/DVSCSTV

### D8

- Dimming Control Phase Control
- Dimming Range 10-100%
- Dim to off no
- Power Factor @ Full Load >0.9
- Efficiency @ Full Load ≥80
- THD @ Full Load <5%

#### Dimmer Compatibility

- Leviton IPE04-1LZ
- Lutron DVELV-300P

As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.