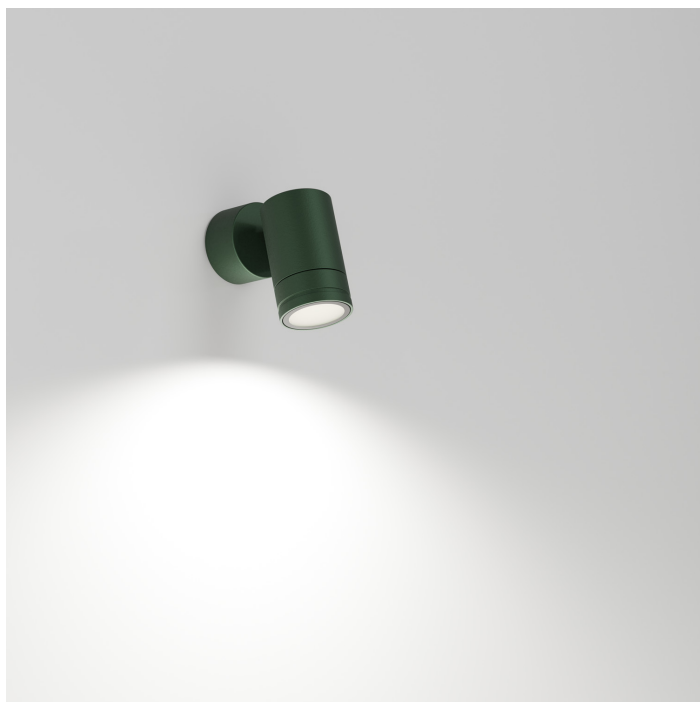






SPIX M 93030

29715 9330 PGR

AVAILABLE IN
ANTHRACITE 29715 9330 N
PINE GREEN 29715 9330 PGR



[View on website](#)



General info

LOCATION	outdoor
INSTALLATION	Floor Surface mounted, Wall Surface mounted
INGRESS PROTECTION	IP65
PROTECTION AGAINST MECHANICAL IMPACT	IK05
WEIGHT (KG)	0.5
ADJUSTABILITY	90° swiveling, 360° rotatable
INFORMATION	LENS FL-30° EXCL. LED POWER SUPPLY 350-700mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	G
CERTIFICATES	CB, ENEC

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 3,9-8,2W / CRI>90 (R9: 55) / 3000K / 385-677lm
TM-30 VALUES	rf: 92 / Rg: 98
SDCM	SDCM2
RISKGROUP	RG2 (threshold 0,6m)
LM80	L90B10 > 41000
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	677lm // 8,2W // 83lm/W
LED TECHNICS (LUMINAIRE)	454lm // 9,4W // 48lm/W

Requirements

LED POWER SUPPLY 350 / 500 / 700mA-DC DIM

Accessories

KAP STRIPER

For detailed installation instructions, please consult the manual : [29715_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1

3

Dimtype: 1-10V

Cutout dimension (mm): 30




300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

3

Dimtype: DALI

Cutout dimension (mm): 45




300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL

3

Dimtype: non-dimmable

Cutout dimension (mm): 30




300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL

3

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 45




300 48 500 ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1

3

Dimtype: 1-10V

Cutout dimension (mm): 30




300 48 500 ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

3

Dimtype: DALI

Cutout dimension (mm): 45




300 48 500 MDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL

3

Dimtype: non-dimmable

Cutout dimension (mm): 30



300 48 500 WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL

3

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 45











SPIX M 93030

29715 9330 PGR

	300 48 700 ED1 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM1	3	☐
	Dimtype: 1-10V		
	Cutout dimension (mm): 30		
	300 48 700 ED5 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5	3	☐
	Dimtype: DALI		
	Cutout dimension (mm): 45		
	300 48 700 MDL LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W MDL	3	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 30		
	300 48 700 WDL LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W WDL	3	☐
	Dimtype: WDL = wireless dimmable		
	Cutout dimension (mm): 45		
	300 90 61 LED POWER SUPPLY MULTI-POWER DIM6	3 3 3	☐
	Dimtype: mains (phase cut-off) or push button		
	Cutout dimension (mm): 56		
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	6(6) 6(6) 6(4)	☐
	Dimtype: 1-10V or DALI or push button		
	Cutout dimension (mm): 82		
	300 90 64 LED POWER SUPPLY MULTI-POWER DIM7	2->4(3) 4(2) 3(1)	☐
	Dimtype: 1-10V or push button		
	Cutout dimension (mm): 72		
	300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9	3 3	☐
	Dimtype: 1-10V or DALI or push button		
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	4(3) 4(2) 3(1)	☐
	Dimtype: DALI		
	Cutout dimension (mm): 72		
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	2->9(10) 9(6) 7(4)	☐
	Dimtype: 1-10V or DALI or push button		
	Cutout dimension (mm): 84		

SPIX M 93030







29715 9330 PGR

	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 55	2->4(3) 3(2) 2(1)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 Dimtype: DALI Cutout dimension (mm): 55	4(3) 3(2) 2(1)	☐
	300 90 135 LED POWER SUPPLY MULTI-POWER HV Dimtype: non-dimmable Cutout dimension (mm): 90	5->7 4->7 4->6 3->6	☐
	21012 0010 LED POWER SUPPLY MULTI POWER Dimtype: non-dimmable Cutout dimension (mm): 50	2->3 3 3	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	4 4 4	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	4 4 4	☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 84	6(6) 5(5) 5(4)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 54	4 4 4	☐
	21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 50	2->2	☐
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 50	3->3	☐


DELTALIGHT

SPIX M 93030

29715 9330 PGR

	21012 0278	LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8	2->2 2->2	☐
Dimtype: mains (phase cut-off)				
Cutout dimension (mm): 55				
	21012 0288	LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8	3->4 3->4	☐
Dimtype: mains (phase cut-off)				
Cutout dimension (mm): 55				
	21012 0298	LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	3 3 2	☐
Dimtype: mains (phase cut-off)				
Cutout dimension (mm): 48				
	21012 0480	LED POWER SUPPLY 350mA-DC / 17W IP68	4(3)	☐
Dimtype: non-dimmable				
Cutout dimension (mm): 60				
	21012 0490	LED POWER SUPPLY 700mA-DC / 30W IP68	3(1)	☐
Dimtype: non-dimmable				
Cutout dimension (mm): 60				
	21012 0500	LED POWER SUPPLY 500mA-DC / 24W IP68	4(2)	☐
Dimtype: non-dimmable				
Cutout dimension (mm): 60				
	21032 0295	LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	3	☐
Dimtype: DALI				
Cutout dimension (mm): 30				
	21032 0305	LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	3	☐
Dimtype: DALI				
Cutout dimension (mm): 30				
	21032 0315	LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5	3	☐
Dimtype: DALI				
Cutout dimension (mm): 30				

Light altering devices



223 00 10 B KAP STRIPER B



Notes: