




ENTERO SQ-L TRIMLESS TW 96530

28537 9020 B

AVAILABLE IN
BLACK 28537 9020 B
FULL WHITE 28537 9020 FW
GOLD COLOURED 28537 9020 GC

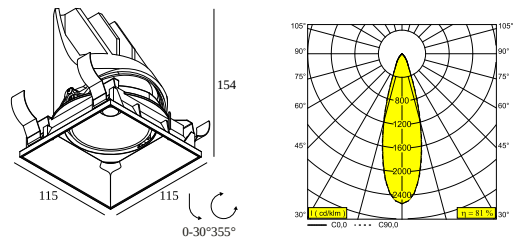

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	rectangle - Ø KIT
RECESSED DEPTH (MM)	165
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.68
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-30° EXCLLED POWER SUPPLY 500mA-DC TW - (DALI DT8) Optional REFLECTORS 18° & 45° available
Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, EPD
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 17,8W / CRI>90 (R9: 50) / 2700K-6500K / 2054lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	2054lm // 17,8W // 116lm/W
LED TECHNICS (LUMINAIRE)	1661lm // 20,5W // 81lm/W

Requirements
MOUNTING KIT ENTERO SQUARE L
LED POWER SUPPLY 500mA-DC TW (Remote)

Accessories
ENTERO L HONEYCOMB
ENTERO L LINEAR SPREAD LENS
ENTERO L SPREAD LENS
ENTERO L SOFTENING LENS
ENTERO L GLASS SBL

ENTERO SQ-L TRIMLESS TW 96530

28537 9020 B

For detailed installation instructions, please consult the manual : [28537_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
 System ceiling	 28400 0060 - MOUNTING KIT ENTERO SQ-L	Required
 Plasterboard	 28400 0060 - MOUNTING KIT ENTERO SQ-L	Required
 Stucanet	 28400 0060 - MOUNTING KIT ENTERO SQ-L	Required
 Wood	 28400 0060 - MOUNTING KIT ENTERO SQ-L	Required
 Concrete + plaster	 28400 0060 - MOUNTING KIT ENTERO SQ-L	Required
 Lintel + plaster	 28400 0060 - MOUNTING KIT ENTERO SQ-L	Required
 Hollow-core slab + plaster	 28400 0060 - MOUNTING KIT ENTERO SQ-L	Required
 Stretched ceiling	 28400 0120 - MOUNTING KIT ENTERO SQ-L CSC	Required
	 28400 0180 - MOUNTING KIT ENTERO SQ-L WSC	Required


FINISH YOUR SPECIFICATION

LED power supplies

of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



21012 0355 LED POWER SUPPLY 500mA-DC 2CH TW DIM5

Dimtype: DALI

Cutout dimension (mm): 85


1

DELTALIGHT

ENTERO SQ-L TRIMLESS TW 96530

28537 9020 B

Mounting kits




28400 0060 MOUNTING KIT ENTERO SQ-L

Cutout dimension (mm): 142 x 142

☐

Mounting kits stretched ceiling



28400 0120 MOUNTING KIT ENTERO SQ-L CSC

☐



28400 0180 MOUNTING KIT ENTERO SQ-L WSC


☐

Light altering devices




28500 0130 ENTERO L LINEAR SPREAD LENS

☐




28500 0140 ENTERO L SPREAD LENS

☐




28500 0150 ENTERO L SOFTENING LENS

☐



28500 0160 ENTERO L GLASS SBL

☐




28500 0170 B ENTERO L HONEYCOMB SINGLE USE B

☐

ENTERO SQ-L TRIMLESS TW 96530

28537 9020 B



28500 0180 B ENTERO L HONEYCOMB DOUBLE USE B



Notes: