




M - LED LINE HE 1 x 12,6W DIM5

23347 0005 B

AVAILABLE IN
BLACK 23347 0005 B

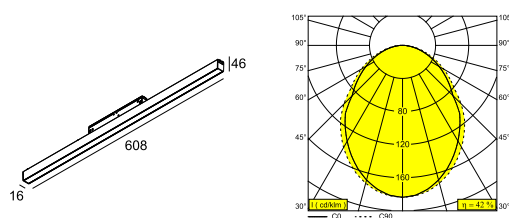

[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	non adjustable
INFORMATION	LED FLEX 21W/m 3000K / CRI90 2600lm/m EXCL.LED POWER SUPPLY 48V-DC
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	E
CERTIFICATES	CB, ENEC
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED flex 12,6W / CRI>90 (R9: 60) / 3000K / 1500lm
SDCM	SDCM3
LM80	L70 > 30000
LED TECHNICS (LIGHT SOURCE)	1500lm // 12,6W // 119lm/W
LED TECHNICS (LUMINAIRE)	625lm // 14,5W // 43lm/W

Remarks

[Take a look at our MAGNETIC PROFILES movie](#)

Requirements

LED POWER SUPPLY 48V-DC

For detailed installation instructions, please consult the manual : [23347_0005_HAND.pdf](#)

DELTALIGHT

M - LED LINE HE 1 x 12,6W DIM5

23347 0005 B

FINISH YOUR SPECIFICATION

LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 89 48 90 LED POWER SUPPLY 48V-DC / 90W

5

Dimtype: non-dimmable


Cutout dimension (mm): 75



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

7

Dimtype: non-dimmable



300 89 48 150 LED POWER SUPPLY 48V-DC / 150W

9

Dimtype: non-dimmable



300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN

16

Dimtype: non-dimmable




21012 0230 LED POWER SUPPLY 48V-DC / 100W

7

Dimtype: non-dimmable

Cutout dimension (mm): 40



21012 0240 LED POWER SUPPLY 48V-DC / 200W

13


Dimtype: non-dimmable

Cutout dimension (mm): 40

COMPATIBLE COMPOSABLES

SHIFTLINE M26 profile

Available Colours




420 26 10 00 SLM26 - PROFILE 1m




DELTALIGHT

M - LED LINE HE 1 x 12,6W DIM5

23347 0005 B



420 26 20 00 SLM26 - PROFILE 2m



420 26 30 00 SLM26 - PROFILE 3m



SHIFTLINE M26H + SBL


Available Colours




30411 9205 SHIFTLINE M26H + SBL 2m DIM5




30411 9305 SHIFTLINE M26H + SBL 2m DIM5




30412 9205 SHIFTLINE M26H + SBL 3m DIM5



30412 9305 SHIFTLINE M26H + SBL 3m DIM5



30413 9205 SHIFTLINE M26H + SBL 4m DIM5




30413 9305 SHIFTLINE M26H + SBL 4m DIM5



SHIFTLINE M26H profile

Available Colours



23359 0000 SLM26H - PROFILE



DELTALIGHT





M - LED LINE HE 1 x 12,6W DIM5

23347 0005 B

	23359 0010 SLM26H - PROFILE 1m	
	23359 0020 SLM26H - PROFILE 2m	
	23359 0030 SLM26H - PROFILE 3m	



SHIFTLINE M26L profile (+ SHIFTLINE M26L MATRIX)

Available Colours

	23358 0000 SLM26L - PROFILE	
	23358 0010 SLM26L - PROFILE 1m	
	23358 0020 SLM26L - PROFILE 2m	
	23358 0030 SLM26L - PROFILE 3m	

SHIFTLINE M35R profile


Available Colours

	23375 0000 SLM35R - PROFILE	
	23375 0010 SLM35R - PROFILE 1m	


DELTALIGHT

M - LED LINE HE 1 x 12,6W DIM5

23347 0005 B



23375 0020 SLM35R - PROFILE 2m




23375 0030 SLM35R - PROFILE 3m




SHIFTLINE M44 profile


Available Colours



23374 0000 SLM44 - PROFILE



23374 0020 SLM44 - PROFILE 2m



23374 0030 SLM44 - PROFILE 3m



SPLITLINE M20 ST profile

Available Colours



23397 0000 SPM20 ST - PROFILE



23397 0020 SPM20 ST - PROFILE 2m




23397 0030 SPM20 ST - PROFILE 3m



SPLITLINE M20 profile

Available Colours






420 20 10 00 SPM20 - PROFILE 1m



DELTALIGHT

M - LED LINE HE 1 x 12,6W DIM5

23347 0005 B

	420 20 20 00 SPM20 - PROFILE 2m	
	420 20 30 00 SPM20 - PROFILE 3m	
	23301 0000 SPM20 - PROFILE B	

Notes: