# OBLIX WIDE, SMALL, FOOT



The unique design of the Oblix bollard and the positioning of the LED results in maximum beam spread and a powerful play of light, providing an expressive and architectural touch to your project. The indirect position of the led avoids direct exposure and dazzle, without compromising the light output. The Oblix can be installed on any hard surface and when combined with a pin it can be planted in any green surrounding.

| **Specification** | |
|---|---|
| Adjustability: | Fixed |
| Rating: | Damp |

| **Performance** | **Small** | **Wide** | **Foot** |
|---|---|---|---|
| CRI / TM-30 (3000K): | 90 / Rf: 90 / Rg: 99 | | |
| SDCM: | 1 | | |
| LED Maintenance: | L90B10>50,000h | | |
| *Standard Power: | 6.7W | 6.7W | 6.7W |
| *High Power: | | | 9.9W |

| **Delivered Lumens** | **2700K** | **3000K** | **2700K** | **3000K** | **2700K** | **3000K** |
|---|---|---|---|---|---|---|
| Oblix 01: | 533 | 557 | 548 | 573 | 548 | 573 |
| Oblix 04: | 526 | 549 | 548 | 573 | | |
| Oblix 07: | 524 | 548 | 548 | 573 | 757 | 792 |
| Oblix 10: | | | | | 757 | 792 |

**Listing**
ETL certified to US and Canadian safety standards.

**Warranty**
5-year limited warranty.

## Ordering
ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: OBXWF01-HP27FX-N-PMINCD14-UNV

| **Luminaire** | **Size** | **Height** | **Power*** | **CCT** | **Function** | **Finish** | **Installation** | **Application** | **Controls***** |
|---|---|---|---|---|---|---|---|---|---|
| **OBX**<br>OBLIX (Bollard) | **SS**<br>Small, standard base | **01**<br>164mm / $6^{7}/_{16}$"<br>**04**<br>414mm / $16^{5}/_{16}$"<br>**07**<br>714mm / $28^{1}/_{8}$" | **SP**<br>Standard Power | **27**<br>2700K<br>**30**<br>3000K | **FX**<br>Fixed Bollard, Exterior Use | **FBRX**<br>Flemish Bronze<br>**N**<br>Anthracite | **DM**<br>Direct Mount<br>**PM**<br>Pin Mount | **INC**<br>Integral Power Supply | **D14-UNV**<br>0-10V 120-277V / FE ELV dim 120V |
| | **WF**<br>Wide, foot base | **01**<br>158mm / $6^{1}/_{4}$"<br>**07**<br>708mm / $27^{7}/_{8}$"<br>**10**<br>1018mm / $40^{1}/_{16}$" | **SP**<br>Standard Power<br>**HP**<br>High Power | **27**<br>2700K<br>**30**<br>3000K | **FX**<br>Fixed Bollard, Exterior Use | **A**<br>Alu Grey<br>**N**<br>Anthracite | | | |
| | **WS**<br>Wide, standard base | **01**<br>160mm / $6^{5}/_{16}$"<br>**04**<br>410mm / $16^{1}/_{8}$"<br>**07**<br>710mm / $27^{15}/_{16}$" | **SP**<br>Standard Power | **27**<br>2700K<br>**30**<br>3000K | **FX**<br>Fixed Bollard, Exterior Use | **A**<br>Alu Grey<br>**N**<br>Anthracite | **DM**<br>Direct Mount<br>**PL**<br>Plate Mount<br>**PM**<br>Pin Moun | | |


*** Contact factory for additional dimming options

## Related Products

**Walker II (bollard), Walker II (wall), Mono (wall), Nocta (wall)**

## Finish Options

### OBLIX SMALL STD BASE 01











### OBLIX SMALL STD BASE 04











### OBLIX SMALL STD BASE 07











### OBLIX WIDE FOOT BASE 01











### OBLIX WIDE FOOT BASE 07











### OBLIX WIDE FOOT BASE 10











### OBLIX WIDE STD BASE 01











### OBLIX WIDE STD BASE 04











### OBLIX WIDE STD BASE 07










## Accessories





JUNCTION BOX
6 216 12 00




IP68 CONNECTOR 3P
6 216 12 03


## Photometric Data

### OBLIX SMALL STD BASE - STD POWER

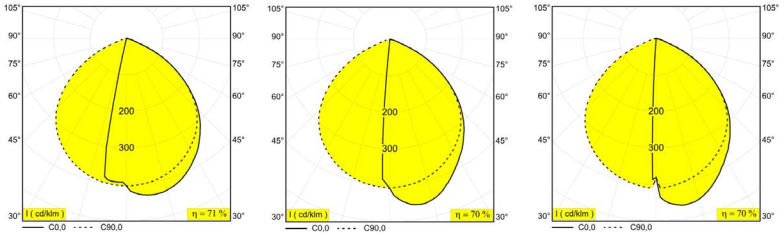



Height 01 Height 04 Height 07

### OBLIX WIDE FOOT BASE - STD POWER





Height 01

### OBLIX WIDE STD BASE - STD POWER

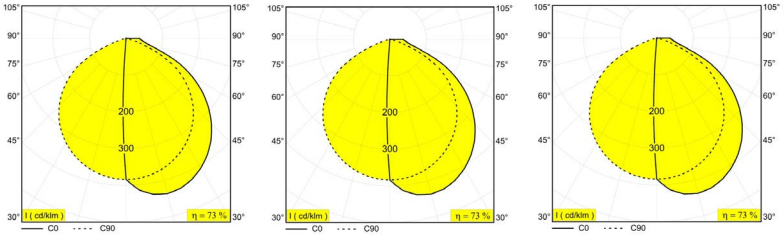


Height 01 Height 04 Height 07


### OBLIX WIDE FOOT BASE - HIGH POWER

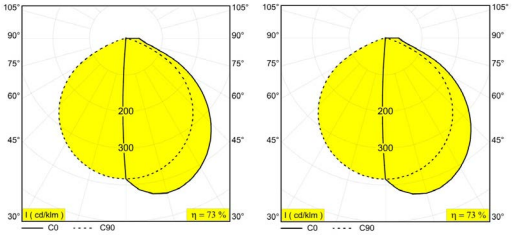


Height 07 Height 10


## Installation Options

### PL - PLATE 7





Used with Size Wide
Standard Base

### PM - PIN 12





Used with Size Wide
Standard Base

### PM - PIN 17




Used with Size Small
Standard Base

### PM - PIN 18




Used with Size Wide
Foot Base

## Driver Options

### D14

- Dimming Control — Phase Control or -10V
- Dimming Range — 1-100%
- Dim to off — yes
- Power Factor @ Full Load — >0.9
- Efficiency @ Full Load — ≥90
- THD @ Full Load — <20%

### Dimmer Compatibility Phase

- Leviton IP1106-1LZ / 6631-2
- Leviton DVELV-303P / MAELV-600

### Dimmer Compatibility 0-10V

- Leviton IP710-DLZ
- Leviton DVTV-XX

**As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.**

DELTALIGHT