




OBIN ON 92724 DIM8

30511 9228 BRAT

- AVAILABLE IN
- BLACK 30511 9228 B
 - BRUSHED ALU 30511 9228 BRA
 - BRUSHED ANTHRACITE 30511 9228 BRAT
 - BRUSHED BROWN BRONZE 30511 9228 BRBB
 - BRUSHED GOLD 30511 9228 BRG
 - BRUSHED OLD BRONZE 30511 9228 BROB
 - CREAM 30511 9228 CR
 - WHITE 30511 9228 W

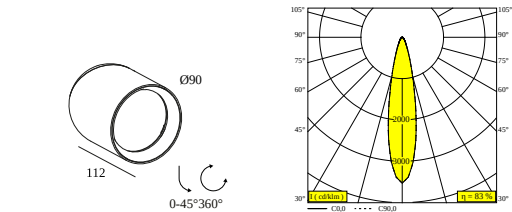

[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Surface mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	0° to 45° swiveling, 360° rotatable
INFORMATION	LENS FL-24° INCL.DIMMABLE POWER SUPPLY
Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	mains (phase cut-off)
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, RCM
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 11,6W / CRI>90 (R9: 60) / 2700K / 1458lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	24°
LED TECHNICS (LIGHT SOURCE)	1458lm // 11,6W // 125lm/W
LED TECHNICS (LUMINAIRE)	1217lm // 13,3W // 91lm/W

Requirements	
SPY 90 TUBE	
Accessories	
HONEYCOMB 75	

For detailed installation instructions, please consult the manual : [30511_XXX8_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Light altering devices



19810 0110 B HONEYCOMB 75 SINGLE USE B

☐

Finish your product



19810 0170 B SPY 90 TUBE B

☐

19810 0170 CR SPY 90 TUBE CR

☐

19810 0170 DC SPY 90 TUBE DC

☐

19810 0170 FBR SPY 90 TUBE FBR

☐

19810 0170 FG SPY 90 TUBE FG

☐

19810 0170 GC SPY 90 TUBE GC

☐

19810 0170 PB SPY 90 TUBE PB

☐

19810 0170 W SPY 90 TUBE W

☐

Notes:

DELTALIGHT

OBIN ON 92724 DIM8

30511 9228 BRAT