

# CONNECT A / I

## CONNECT I

Connect I balances on the edge between wall and ceiling or wall and wall, as you like. Mounted directly into the corner, this minimalistic profile generates a soft line of light on one or both sides, transforming bare corners into decorative perimeters.

## CONNECT A

The delicate Connect A is designed to add subtle accents onto vertical surfaces. Emitted from a profile of only 11 by 51mm, Connect A can be applied as a linear down-up light.



[www.deltalight.com/connect](http://www.deltalight.com/connect)

**ATTACHED  
TO THE WALL**

A.K.A. ANDEMEUR

**IN THE  
CORNER**

A.K.A. INDENOËK



**A**

## CONNECT

## A

## I

### 1 PROFILE

PROFILE / m  
MAX. LENGTH PER PROFILE SECTION 6m

28101 0000 ◇  
◇ B ● / W ○

28102 0000 ◇  
◇ B ● / W ○

POLYCARBONATE / m

SANDBLASTED (SBL)

INCLUDED

INCLUDED

### 2 DIMENSIONS

The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.

### 3 JUNCTION / CORNER

### 4 ENDCAP

ENDCAP (2 PCS.)

28101 0310 B / W

28102 0310 B / W

### 5 FIXATION

SURFACE MOUNTED

INSIDE CLIP (2 PCS.)



391 06 11

### 6 CONNECTION

### 7 LED FLEX

## LIGHT MODULES

SEE PAGE 419

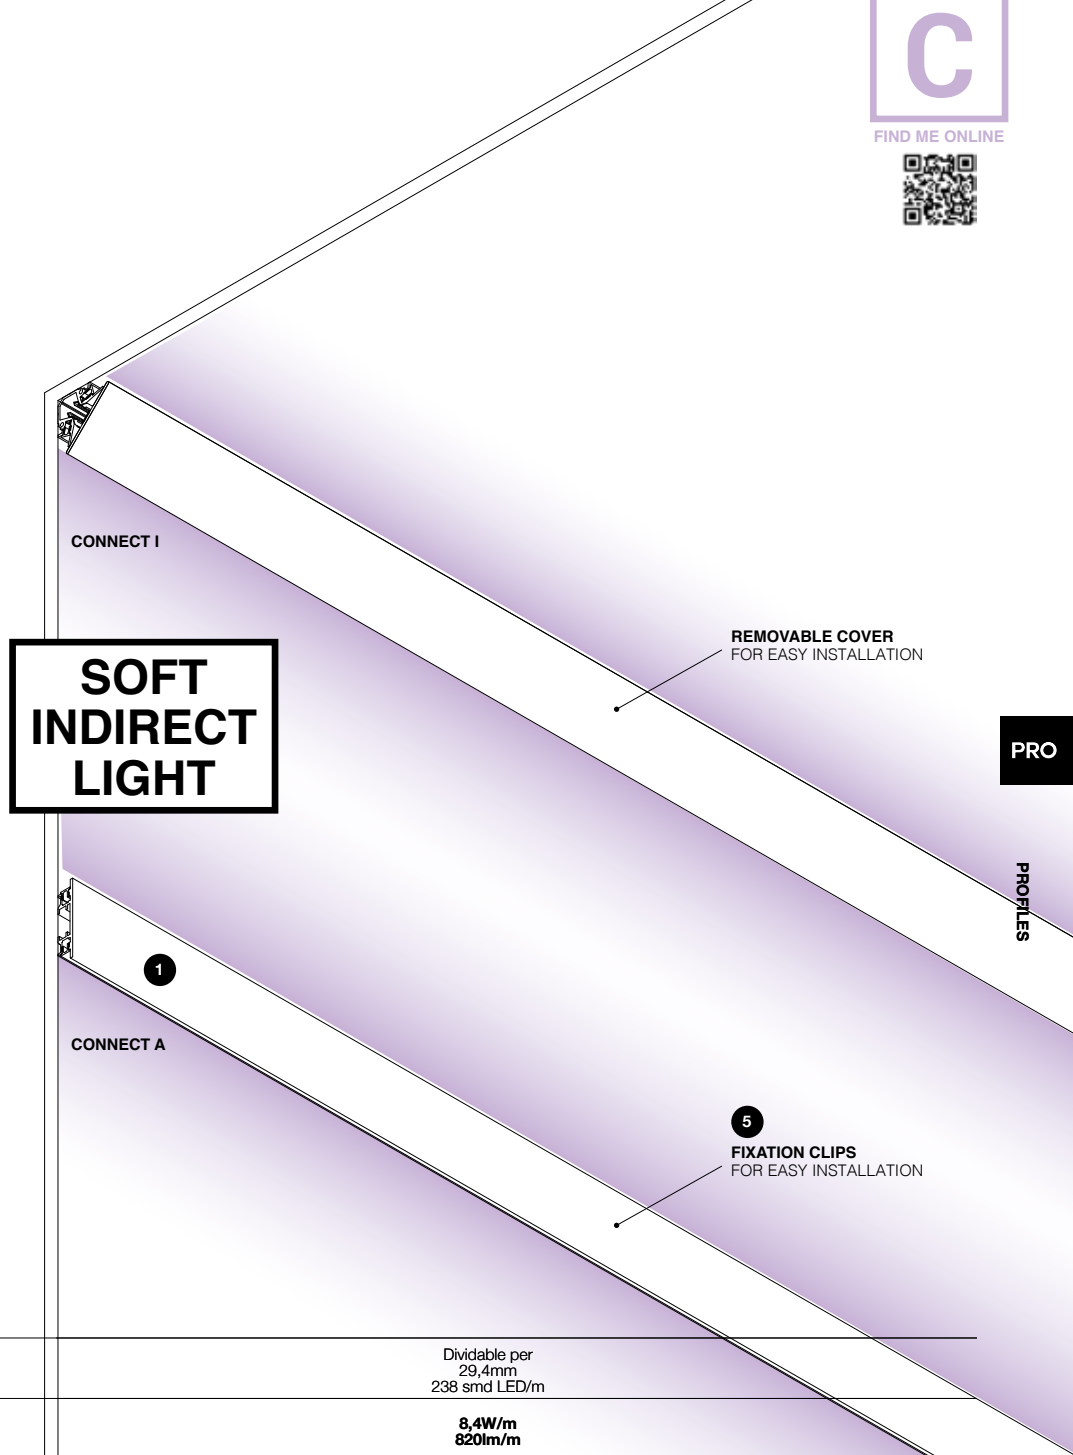

Dividable per  
29,4mm  
238 smd LED/m

**8,4W/m**  
**820lm/m**

| LEDFLEX           |    | SMALL        |  |
|-------------------|----|--------------|--|
| 4000K<br>CRI > 90 | IN | 300 91 51 94 |  |
| 3000K<br>CRI > 90 | IN | 300 91 51 93 |  |
| 2700K<br>CRI > 90 | IN | 300 91 51 92 |  |

**LED POWER SUPPLY 24V-DC** (MAX. 5M/POWERLINE) MORE INFO TECHNICAL CHAPTER

|                     |             |                      |            |
|---------------------|-------------|----------------------|------------|
| NON DIM             | 24W / IP20  | <b>21012 0160</b>    | max. 2,8m  |
|                     | 150W / IP67 | <b>300 89 24 150</b> | max. 17,8m |
|                     | 60W / IP20  | <b>21012 0171</b>    | max. 7,1m  |
|                     | 90W / IP20  | <b>21012 0181</b>    | max. 10,7m |
| 0-10V DIM<br>(DIM1) | 120W / IP20 | <b>21012 0191</b>    | max. 14,2m |
|                     | 60W / IP67  | <b>21012 0101</b>    | max. 7,1m  |
|                     | 90W / IP67  | <b>21012 0111</b>    | max. 10,7m |
|                     | 120W / IP67 | <b>21012 0121</b>    | max. 14,2m |
| DALI<br>(DIM5)      | 60W / IP20  | <b>21012 0205</b>    | max. 7,1m  |
|                     | 100W / IP20 | <b>21012 0225</b>    | max. 11,9m |
|                     | 60W / IP67  | <b>21012 0135</b>    | max. 7,1m  |
|                     | 90W / IP67  | <b>21012 0145</b>    | max. 10,7m |
|                     | 120W / IP67 | <b>21012 0155</b>    | max. 14,2m |