




OBIN ON 92736 DIM8

30511 9238 BRA

- AVAILABLE IN  
**BLACK** 30511 9238 B  
**BRUSHED ALU** 30511 9238 BRA  
**BRUSHED ANTHRACITE** 30511 9238 BRAT  
**BRUSHED BROWN BRONZE** 30511 9238 BRBB  
**BRUSHED GOLD** 30511 9238 BRG  
**BRUSHED OLD BRONZE** 30511 9238 BROB  
**CREAM** 30511 9238 CR  
**WHITE** 30511 9238 W

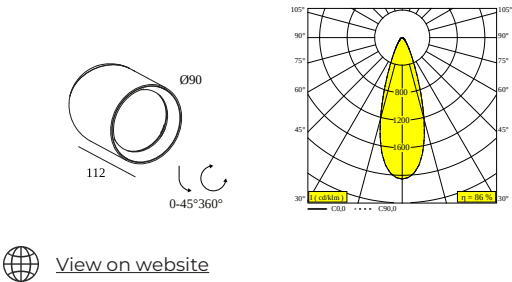

 [View on website](#)




| General info                |                                                    |
|-----------------------------|----------------------------------------------------|
| LOCATION                    | indoor                                             |
| INSTALLATION                | Ceiling Surface mounted                            |
| INGRESS PROTECTION          | IP20                                               |
| WEIGHT (KG)                 | 0.5                                                |
| ADJUSTABILITY               | 0° to 45° swiveling, 360° rotatable                |
| INFORMATION                 | LENS FL-36°<br>INCL.DIMMABLE POWER SUPPLY          |
| Electrical info             |                                                    |
| ELECTRICAL                  | 220-240V / 50-60Hz                                 |
| CLASS                       | I                                                  |
| POWER SUPPLY                | YES                                                |
| DIM TYPE                    | mains (phase cut-off)                              |
| ENERGY CLASS                | E                                                  |
| CERTIFICATES                | CB, ENEC, RCM                                      |
| Lightsource info            |                                                    |
| LIGHTSOURCE NAME            | LED                                                |
| LIGHTSOURCE                 | LED array 11,6W / CRI>90 (R9: 60) / 2700K / 1458lm |
| TM-30 VALUES                | rf: 89 / Rg: 100                                   |
| SDCM                        | SDCM1                                              |
| RISKGROUP                   | RG1                                                |
| LM80                        | L90B10 > 50000                                     |
| BEAMANGLE                   | 36°                                                |
| LED TECHNICS (LIGHT SOURCE) | 1458lm // 11,6W // 125lm/W                         |
| LED TECHNICS (LUMINAIRE)    | 1258lm // 13,3W // 94lm/W                          |

| Requirements |  |
|--------------|--|
| SPY 90 TUBE  |  |
| Accessories  |  |
| HONEYCOMB 75 |  |

For detailed installation instructions, please consult the manual : [30511\\_XXX8\\_HAND.pdf](#)

### FINISH YOUR SPECIFICATION

#### Light altering devices



**19810 0110 B** HONEYCOMB 75 SINGLE USE B

☐

#### Finish your product



**19810 0170 B** SPY 90 TUBE B

☐

**19810 0170 CR** SPY 90 TUBE CR

☐

**19810 0170 DC** SPY 90 TUBE DC

☐

**19810 0170 FBR** SPY 90 TUBE FBR

☐

**19810 0170 FG** SPY 90 TUBE FG

☐

**19810 0170 GC** SPY 90 TUBE GC

☐

**19810 0170 PB** SPY 90 TUBE PB

☐

**19810 0170 W** SPY 90 TUBE W

☐

Notes:

# DELTALIGHT

## **OBIN ON 92736 DIM8**

30511 9238 BRA