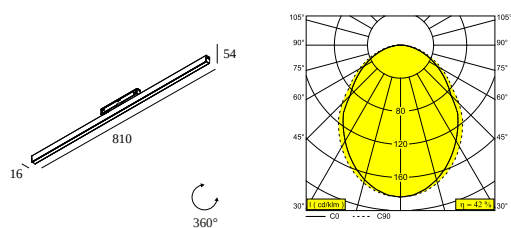




M26L - LED LINE OK 927 MDL

29315 9200 W

AVAILABLE IN
BLACK 29315 9200 B
WHITE 29315 9200 W



 [View on website](#)



General info

LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	355° swiveling
INFORMATION	EXCL.LED POWER SUPPLY 48V-DC

Electrical info

ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	MDL = 1-10V or DALI or push button
ENERGY CLASS	E

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED flex 18W / CRI>90 (R9: 60) / 2700K / 2240lm
SDCM	SDCM3
LM80	L70 > 30000
LED TECHNICS (LIGHT SOURCE)	2240lm // 18W // 124lm/W
LED TECHNICS (LUMINAIRE)	934lm // 20,7W // 45lm/W

Remarks

[Take a look at our MAGNETIC PROFILES movie](#)

Requirements

LED POWER SUPPLY 48V-DC

Options

DIMMABLE MODULATOR

For detailed installation instructions, please consult the manual : [29315_XXX0_HAND.pdf](#)

M26L - LED LINE OK 927 MDL

29315 9200 W

FINISH YOUR SPECIFICATION

Current supply

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



21032 0030 SMART 48 MODULATOR PLUG-IN WD

9

Dimtype: WDL = wireless dimmable

SMART 48

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



300 90 011 SMART 48 MODULATOR DIM9

9

Dimtype: 1-10V or DALI or push button



300 90 012 SMART 48 MODULATOR WD

9

Dimtype: WDL = wireless dimmable

LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

4

Dimtype: non-dimmable



300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN



11

Dimtype: non-dimmable





DELTALIGHT

M26L - LED LINE OK 927 MDL

29315 9200 W

	21012 0230 LED POWER SUPPLY 48V-DC / 100W	4	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 40		
	21012 0240 LED POWER SUPPLY 48V-DC / 200W	9	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 40		

COMPATIBLE COMPOSABLES

SHIFTLINE M26L profile (+ SHIFTLINE M26L MATRIX)	Available Colours
 23358 0000 SLM26L - PROFILE	
 23358 0010 SLM26L - PROFILE 1m	
 23358 0020 SLM26L - PROFILE 2m	
 23358 0030 SLM26L - PROFILE 3m	

Notes: