




SPIX P100-3 93010

29718 9310 PGR

AVAILABLE IN
ANTHRACITE 29718 9310 N
PINE GREEN 29718 9310 PGR

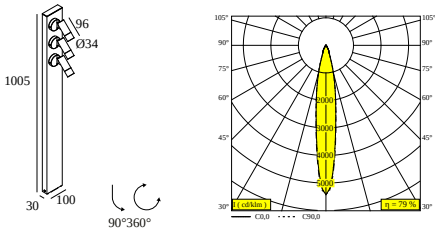

 [View on website](#)



General info	
LOCATION	outdoor
INSTALLATION	Floor Surface mounted
INGRESS PROTECTION	IP65
PROTECTION AGAINST MECHANICAL IMPACT	IK05
WEIGHT (KG)	2.4
ADJUSTABILITY	90° swiveling, 360° rotatable
INFORMATION	LENS 10° INCLLED POWER SUPPLY 700mA-DC

Electrical info	
ELECTRICAL	100-240V / 50-60Hz
CLASS	II
POWER SUPPLY	YES
ENERGY CLASS	F

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	3 x (LED array 2W / CRI>90 (R9: 60) / 3000K / 240lm)
TM-30 VALUES	Rf: 91 / Rg: 101
SDCM	SDCM3
RISKGROUP	RG2
LM80	L90B10 > 150000
BEAMANGLE	10°
LED TECHNICS (LIGHT SOURCE)	720lm // 6W // 120lm/W
LED TECHNICS (LUMINAIRE)	566lm // 6,9W // 82lm/W


Requirements	
PIN 11	
PLATE 12	

Options	
CBOX	
IP68 CONNECTION KIT	
IP68 CONNECTOR 3P	

For detailed installation instructions, please consult the manual : [29718_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION


Waterproof connection parts



216 12 00 CBOX

☐

Cutout dimension (mm): 142 x 142




216 12 01 IP68 CONNECTION KIT

☐


216 12 02 IP68 CONNECTOR 3P

☐

Pins and plates for bollards



229 01 11 PIN 11

☐

15223 0120 N PLATE 12 N

☐

Notes: