




FRAX MB 93014 DIM5

REFERENCE 26010 9315 N

AVAILABLE IN
FLEMISH BRONZE POUR L'EXTÉRIEUR 26010 9315 FBRX
ANTHRACITE 26010 9315 N
VERT SAPIN 26010 9315 PGR

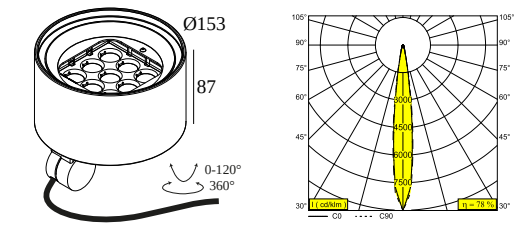

 [View on website](#)



General info	
LOCATION	exterieur
INSTALLATION	Sol Applique,Mur Applique
INGRESS PROTECTION	IP65
PROTECTION AGAINST MECHANICAL IMPACT	IK08
WEIGHT (KG)	2.1
ADJUSTABILITY	0° à 120° inclinable, 360° rotatif
INFORMATION	9 x LENS SP-14° INCL.DIMMABLE LED POWER SUPPLY 900mA-DC INCL.1 x CABLE H05 RN-F 5 x 1mm² 2m

Electrical info	
ELECTRICAL	110-277V / 50-60Hz
CLASS	I
POWER SUPPLY INCLUDED	YES
DIM TYPE	DALI
ENERGY CLASS	F
CERTIFICATION	EPD, RCM

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED cluster 23,4W / CRI>90 (R9: 60) / 3000K / 2654lm
RVALUES	Rf: 92 / Rg: 99
SDMC	SDCM3
RISKGROUP	RG2
LM80	L80 > 150000
BEAMANGLE	14°
LED TECHNICS (LIGHT SOURCE)	2654lm // 23,4W // 113lm/W
LED TECHNICS (LUMINAIRE)	2070lm // 26,9W // 77lm/W

Requirements	
FRAX BRACKET	
FRAX PIN	
FRAX STRAP	


Options	
FRAX ANTI VANDAL SCREWS	

Accessories	
FRAX M KAP	

For detailed installation instructions, please consult the manual : [26010_XX15_HAND.pdf](#)

FINISH YOUR SPECIFICATION

les accessoires de montage pour les bornes



26070 0040 FBRX FRAX PIN FBRX

☐


26070 0040 N FRAX PIN N

☐

26070 0040 PGR FRAX PIN PGR

☐

les accessoires de fixations



26070 0060 FBRX FRAX BRACKET FBRX

☐


26070 0060 N FRAX BRACKET N

☐

26070 0060 PGR FRAX BRACKET PGR

☐

modifier les dispositifs de lumière



26070 0020 N FRAX M KAP N


☐

DELTALIGHT


FRAX MB 93014 DIM5

26010 9315 N

divers



26070 0030 FRAX ANTI VANDAL SCREWS 5 PCS



26070 0050 N FRAX STRAP N



Notes: