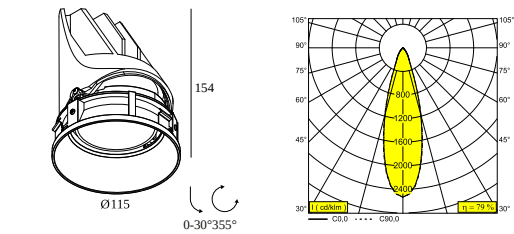




ENTERO RD-L TRIMLESS 93030

28435 9320 B

AVAILABLE IN
BLACK 28435 9320 B
FULL WHITE 28435 9320 FW
GOLD COLOURED 28435 9320 GC



[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - Ø KIT
RECESSED DEPTH (MM)	165
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.67
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-30° EXCL. LED POWER SUPPLY 350-1050mA-DC Optional REFLECTORS 18° & 45° available
Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	D
CERTIFICATES	CB, ENEC, EPD
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 11,3-36,5W / CRI>90 (R9: 52) / 3000K / 1632-4579lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	4579lm // 36,5W // 126lm/W
LED TECHNICS (LUMINAIRE)	3637lm // 42W // 87lm/W

Remarks
Max.900mA when using 1 accessory; max 800mA when using 2 accessories

Requirements
MOUNTING KIT ENTERO ROUND L
LED POWER SUPPLY 350 / 500 / 700 / 1050mA-DC DIM (Remote)

Accessories
ENTERO L HONEYCOMB
ENTERO L LINEAR SPREAD LENS
ENTERO L SPREAD LENS
ENTERO L SOFTENING LENS
ENTERO L GLASS SBL

ENTERO RD-L TRIMLESS 93030



28435 9320 B

For detailed installation instructions, please consult the manual : [28435_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY











Ceiling Type	Mounting Kit	
 System ceiling	 28400 0030 - MOUNTING KIT ENTERO RD-L	Required
 Plasterboard	 28400 0030 - MOUNTING KIT ENTERO RD-L	Required
 Stucanet	 28400 0030 - MOUNTING KIT ENTERO RD-L	Required
 Concrete + plaster	 28400 0030 - MOUNTING KIT ENTERO RD-L	Required
 Lintel + plaster	 28400 0030 - MOUNTING KIT ENTERO RD-L	Required
 Hollow-core slab + plaster	 28400 0030 - MOUNTING KIT ENTERO RD-L	Required
 Stretched ceiling	 28400 0090 - MOUNTING KIT ENTERO RD-L CSC	Required
	 28400 0150 - MOUNTING KIT ENTERO RD-L WSC	Required

FINISH YOUR SPECIFICATION

LED power supplies	# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.	
 300 90 63 LED POWER SUPPLY MULTI-POWER DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 82	2(2) 2(2) 2(1) - ☐
 300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9 Dimtype: 1-10V or DALI or push button	1 ☐

ENTERO RD-L TRIMLESS 93030

28435 9320 B


	300 90 135 LED POWER SUPPLY MULTI-POWER HV Dimtype: non-dimmable Cutout dimension (mm): 90	1	☐
	300 90 136 LED POWER SUPPLY MULTI-POWER HC DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 90	1(1)	☐
	21012 0010 LED POWER SUPPLY MULTI POWER Dimtype: non-dimmable Cutout dimension (mm): 50	1	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	1	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	1	☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 84	1(1)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 54	1	☐
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68 Dimtype: non-dimmable Cutout dimension (mm): 60	1(1)	☐
	21012 0490 LED POWER SUPPLY 700mA-DC / 30W IP68 Dimtype: non-dimmable Cutout dimension (mm): 60	1(0)	☐
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68 Dimtype: non-dimmable Cutout dimension (mm): 60	1(0)	☐

DELTALIGHT

ENTERO RD-L TRIMLESS 93030

28435 9320 B

Mounting kits




159 118 224

28400 0030 MOUNTING KIT ENTERO RD-L

☐

Cutout dimension (mm): 162

Mounting kits stretched ceiling



118 200 200

28400 0090 MOUNTING KIT ENTERO RD-L CSC

☐



113 1121

28400 0150 MOUNTING KIT ENTERO RD-L WSC

☐


Light altering devices



113 118 118 118 Ø77

28500 0130 ENTERO L LINEAR SPREAD LENS

☐



113 118 118 118 Ø77

28500 0140 ENTERO L SPREAD LENS

☐



113 118 118 118 Ø77

28500 0150 ENTERO L SOFTENING LENS


☐



113 118 118 118 Ø77

28500 0160 ENTERO L GLASS SBL

☐



113 118 118 118 Ø77


28500 0170 B ENTERO L HONEYCOMB SINGLE USE B

☐

DELTALIGHT

ENTERO RD-L TRIMLESS 93030

28435 9320 B



28500 0180 B ENTERO L HONEYCOMB DOUBLE USE B



Notes: