




SUPERLOOP-SPY 52 92730 MDL

20567 9240 W

AVAILABLE IN  
**BLACK** 20567 9240 B  
**FLEMISH BRONZE** 20567 9240 FBR  
**FLEMISH GOLD** 20567 9240 FG  
**GOLD COLOURED** 20567 9240 GC  
**WHITE** 20567 9240 W

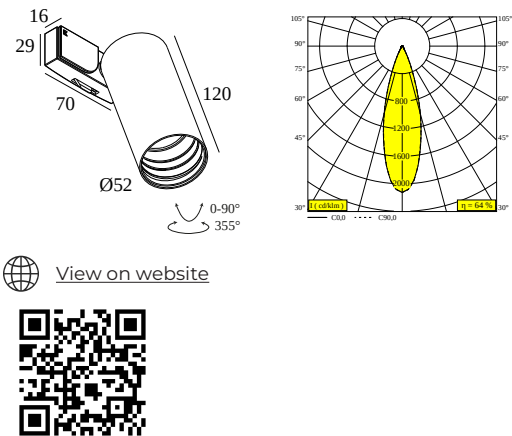

[View on website](#)



| General info       |                                                                                                                      |
|--------------------|----------------------------------------------------------------------------------------------------------------------|
| LOCATION           | indoor                                                                                                               |
| INSTALLATION       | Low voltage systems Low voltage system mounted                                                                       |
| INGRESS PROTECTION | IP20                                                                                                                 |
| WEIGHT (KG)        | 0.4                                                                                                                  |
| ADJUSTABILITY      | 0° to 90° swiveling, 355° rotatable                                                                                  |
| INFORMATION        | REFLECTOR FL-30°<br>INCL.CLIP 48V ADAPTER<br>EXCL.LED POWER SUPPLY 48V-DC<br>Optional REFLECTORS 20° & 45° available |

| Electrical info |                                    |
|-----------------|------------------------------------|
| ELECTRICAL      | 48V-DC                             |
| CLASS           | III                                |
| DIM TYPE        | MDL = 1-10V or DALI or push button |
| ENERGY CLASS    | E                                  |
| CERTIFICATES    | CB, ENEC                           |

| Lightsource info            |                                                   |
|-----------------------------|---------------------------------------------------|
| LIGHTSOURCE NAME            | LED                                               |
| LIGHTSOURCE                 | LED array 8,6W / CRI>90 (R9: 60) / 2700K / 1041lm |
| TM-30 VALUES                | rf: 89 / Rg: 100                                  |
| SDCM                        | SDCM1                                             |
| RISKGROUP                   | RG1                                               |
| LM80                        | L90B10 > 50000                                    |
| BEAMANGLE                   | 30°                                               |
| LED TECHNICS (LIGHT SOURCE) | 1041lm // 8,6W // 121lm/W                         |
| LED TECHNICS (LUMINAIRE)    | 664lm // 9,9W // 67lm/W                           |

| Requirements            |  |
|-------------------------|--|
| SPY 52 TUBE             |  |
| LED POWER SUPPLY 48V-DC |  |

| Options            |  |
|--------------------|--|
| DIMMABLE MODULATOR |  |

| Accessories           |  |
|-----------------------|--|
| HONEYCOMB 42          |  |
| SPREAD LENS 42        |  |
| LINEAR SPREAD LENS 42 |  |
| SOFTENING LENS 42     |  |

## SUPERLOOP-SPY 52 92730 MDL

20567 9240 W

GLASS SBL 42

For detailed installation instructions, please consult the manual : [20567\\_XXX0\\_HAND.pdf](#)

## FINISH YOUR SPECIFICATION

### SMART 48

### # of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.


Min current | Max current



**300 90 011** SMART 48 MODULATOR DIM9

19

Dimtype: 1-10V or DALI or push button



**300 90 012** SMART 48 MODULATOR WD

19


Dimtype: WDL = wireless dimmable

### LED power supplies

### # of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.


Min current | Max current



**300 89 48 100** LED POWER SUPPLY 48V-DC / 100W DIN

10


Dimtype: non-dimmable



**300 89 48 240** LED POWER SUPPLY 48V-DC / 240W DIN

24

Dimtype: non-dimmable



**21012 0230** LED POWER SUPPLY 48V-DC / 100W

10

Dimtype: non-dimmable

Cutout dimension (mm): 40

# DELTALIGHT

## SUPERLOOP-SPY 52 92730 MDL

20567 9240 W




**21012 0240** LED POWER SUPPLY 48V-DC / 200W

20 ☐

Dimtype: non-dimmable


Cutout dimension (mm): 40

### Light altering devices




**19810 0010 B** HONEYCOMB 42 SINGLE USE B

☐



**19810 0020** LINEAR SPREAD LENS 42

☐




**19810 0030** SPREAD LENS 42

☐




**19810 0040** SOFTENING LENS 42

☐



**19810 0050** GLASS SBL 42


☐



**19810 0060 B** HONEYCOMB 42 DOUBLE USE B

☐

### Finish your product



**19810 0100 B** SPY 52 TUBE B

☐

**19810 0100 FBR** SPY 52 TUBE FBR

☐

# DELTALIGHT

## SUPERLOOP-SPY 52 92730 MDL

20567 9240 W

|                      |                |                          |
|----------------------|----------------|--------------------------|
| <b>19810 0100 FG</b> | SPY 52 TUBE FG | <input type="checkbox"/> |
| <b>19810 0100 GC</b> | SPY 52 TUBE GC | <input type="checkbox"/> |
| <b>19810 0100 W</b>  | SPY 52 TUBE W  | <input type="checkbox"/> |




### Replaceable reflector / lens

|                                                                                    |                                        |                          |
|------------------------------------------------------------------------------------|----------------------------------------|--------------------------|
|    | <b>19810 0180</b> SPY 52 REFLECTOR 20° | <input type="checkbox"/> |
|   | <b>19810 0190</b> SPY 52 REFLECTOR 45° | <input type="checkbox"/> |
|  | <b>19810 0240</b> SPY 52 REFLECTOR 30° | <input type="checkbox"/> |

## COMPATIBLE COMPOSABLES

### SUPERLOOP HC MDL

### Available Colours

|                                                                                    |                                        |                                                                                                                                                                                                                                                                   |
|------------------------------------------------------------------------------------|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <b>418 481 07</b> SUPERLOOP HC 70 MDL  |    |
|  | <b>418 481 09</b> SUPERLOOP HC 90 MDL  |    |
|  | <b>418 481 12</b> SUPERLOOP HC 120 MDL |    |

# DELTALIGHT

## SUPERLOOP-SPY 52 92730 MDL

20567 9240 W



**418 481 17** SUPERLOOP HC 170 MDL



### SUPERLOOP HC MDL XL

Available Colours




**20555 0000** SUPERLOOP HC 200 MDL





**20556 0000** SUPERLOOP HC 250 MDL





**20557 0000** SUPERLOOP HC 300 MDL






**20558 0000** SUPERLOOP HC 350 MDL





**20559 0000** SUPERLOOP HC 400 MDL






**20560 0000** SUPERLOOP HC 500 MDL




### SUPERLOOP PLUS MDL

Available Colours



**20564 0000** SUPERLOOP PLUS HC 70 MDL






**20565 0000** SUPERLOOP PLUS HC 90 MDL



# DELTALIGHT

## SUPERLOOP-SPY 52 92730 MDL

20567 9240 W




20566 0000

SUPERLOOP PLUS HC 120 MDL



### SUPERLOOP S HC MDL


Available Colours



418 482 106

SUPERLOOP S HC 106 MDL






418 482 109

SUPERLOOP S HC 109 MDL






418 482 211

SUPERLOOP S HC 211 MDL





418 482 217

SUPERLOOP S HC 217 MDL



Notes: